Base — cutlist and sheet layout

56 pieces, 3 sheets of 18 mm Baltic birch. Millimetres throughout. Grouped the way the base goes together, so a group is one assembly and carries everything that goes into it.

> **Leg strips are ripped at 90 and trimmed to 86 once the lamination is dry**, so every piece cut from strip stock — fillers and foot spacers included — is listed at 90 wide.
>
> **The glue-up spacers are not in this list.** One set holds a leg's slot open while it is clamped and comes straight back out to be used on the next leg, so it is one set cut from rail offcut, waxed or taped, not a part of the base.
>
> **Kerf 1.6, edge trim 1.6** — one pass off a factory edge and nothing more, so a usable 4 × 8 is 1216 × 2435.2.

The cutlist, by assembly group

Piece	Size	Qty	Notes
Rear corner legs — 2 of them They carry no tenon and the box must NOT land on them: each stops level with the upper grid's top, and the back wall sits in a full-height rebate in the inner strip only.			
Leg strip	864 × 90	**4**	2 per leg. Inner strip takes an 18 x 18 rebate down its back edge, full height; the outboard strip stays whole
Leg filler	564 × 90	**4**	2 per leg, closing the slot between the grids. Trim to 68 deep here - the back wall takes the slot's back 18
Foot spacer	100 × 90	**4**	2 per leg, closing the slot from the floor up to the lower rail. It is what the leg stands on
Three bearing legs — 3 of them The box lands on these and nowhere else. TWO KINDS UNDER ONE HEADING: a front leg is ledged on two faces, so its outboard strip stops at the shoulder and its tenon is one tab on the inner strip; the back centre leg is ledged on its back face only, so both strips run full length and the slot splits its tenon into two tabs.			
Leg strip, full length	990 × 90	**4**	both strips of the back centre leg, and the INNER strip of each front leg
Leg strip, front outboard	874 × 90	**2**	one per front leg, and it is shorter: the side ledge is 42 deep across an 18 strip, so it swallows that strip whole and its top face IS the bearing shoulder
Leg filler, front legs	564 × 90	**4**	2 per front leg, 86 deep. The back centre leg gets none - the central wall fills its slot
Foot spacer	100 × 90	**6**	2 per leg, all three
Tenon corner spacer	116 × 44	**2**	the two FRONT legs, and it is 12 stock, not 18 - glued to the OUTER face of the tenon tab
Lower fore-aft rails — 2 of them Four laminations, not two: the inner pair passes through the legs' slot and a pad is added each side, butting the leg's face because it cannot pass through. The pads are what the caster plates land on.			

Rail lamination	1223 × 100	**4**	2 per rail, filling the legs' 36 slot
Outer pad	1087 × 100	**4**	one each side of each rail, bringing it out to 72 so a 73 caster plate lands on a full face
Caster block	73 × 73	**4**	one per corner caster, bearing on the rail's underside hard against a corner leg's face. THICKNESS IS CUT TO FIT, and all five blocks come off one piece so they match
Upper fore-aft rails — 2 of them Two laminations only - the pads are what feed the casters and there are none up here.			
Rail lamination	1223 × 100	**4**	2 per rail
Front cross rail, lower One rail, two laminations doing different jobs.			
Outer, housed in the legs	1223 × 100	**1**	full width, housed 18 deep in the front faces of the legs' inner strips, and it stops one lamination short at each end so the outermost strip covers its end grain
Inner, spans between	1115 × 100	**1**	between the front legs, housed in nothing
Front cross rail, upper The same two pieces again.			
Outer, housed in the legs	1223 × 100	**1**	as the lower
Inner, spans between	1115 × 100	**1**	as the lower
Rear shear wall It replaces the back cross rails at BOTH grids, so it must not be cut into strips - and it is glued and screwed to all three rear legs, which is what makes the back a single assembly.			
Wall, one sheet	1216 × 764	**1**	CUT TO THE SHEET: its length is the sheet's full usable width, so the two cuts that trim the long edges are its two ends. It stops 10 shy of the box
Central shear wall Two laminations filling the back centre leg's slot, dry-fitted and bolted. It ties the front and back assemblies together with the fore-aft rails.			
Wall lamination	1241 × 758	**2**	notched at BOTH front corners, 18 across by 100 up, to ride over the front cross rails' inner lamination
Lower band pad	1137 × 100	**2**	one each side, flush with the wall's bottom edge. It brings the wall out to 72 for the centre caster's plate, and its top edge is level with the lower grid's top
Caster block	73 × 73	**1**	the fifth block, bearing on this wall's bottom edge just forward of the back centre leg


How it divides across the sheets

Each sheet is loaded from one end, longest pieces first, **so what is left over is one whole offcut rather than a fringe of strips**. A band is as deep as the longest piece in it and gets filled across the sheet's width.


🔴 **The rear shear wall takes a band of its own with nothing beside it.** Its 1216 length IS the sheet's usable width, so there is no room for a neighbour and its two ends are the trim cuts.

Sheet 1 — 5 × 5, the central wall and nothing else


Both laminations come off one sheet, which is the reason the central wall is cut 6 shorter than the rear one.

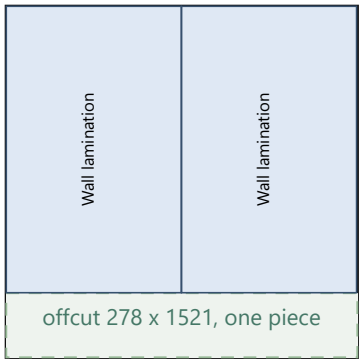

Sheet 2 — 4 × 8

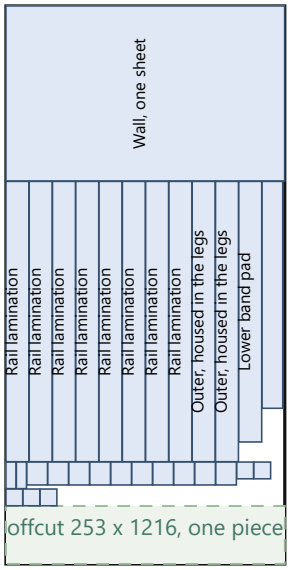

Sheet 3 — 4 × 8

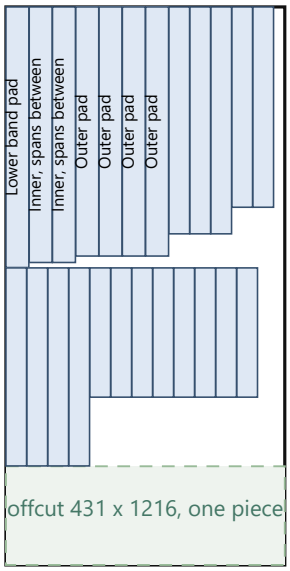
Lower band pad
Inner, spans between
Inner, spans between
Outer pad
Outer pad
Outer pad
Outer pad
offcut 431 x 1216, one piece