


ioSender V2 — Overview

An enhanced **all-in-one** grblHAL / Grbl g-code sender. ioSender V2 is the ongoing offshoot of [stevenrwood/ioSender](#) (itself a one-time fork of [terjeio/ioSender](#)), severed from upstream at the **PR-era cutoff**. There are no composable feature branches and nothing is submitted upstream any more — the product is the `master` branch, consumed whole. This page maps how V2 came to be and how its repos wire together at runtime; the [full changelog](#) follows below.

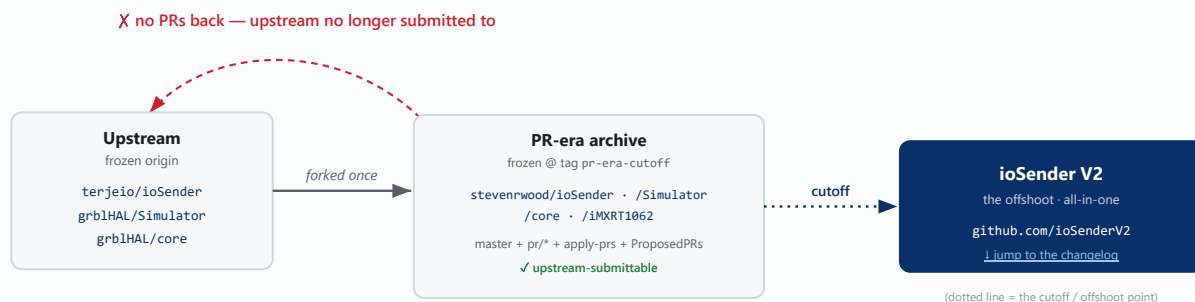

One fork from each upstream → the PR-era archive (everything up to the cutoff, still submittable) → a dotted hand-off across the cutoff to **ioSender V2**, where all development now happens. Upstream is a frozen origin with the return path severed.

V2 repos & how they wire together at runtime

The app and simulator moved to the **ioSenderV2** org (original names kept, full git history preserved). The grblHAL **firmware** was *not* migrated — its deep submodule web makes it all-or-nothing, so it stays in the frozen fork, referenced by the `pr-era-cutoff` tag.

ioSenderV2/ioSender

The WPF sender app (this document lives here). Talks to the controller over USB serial or Telnet/WebSocket.

ioSenderV2/Simulator

Option-matched simulator. On connect the app reads the controller's build options → a 12-hex signature, then pulls a matching sim from this repo's `sim-<sig>` releases (a shared build cache), dispatching the `build-matched-sim` CI to produce one if absent. Every download is public; a token is only needed to *trigger* a build.

stevenrwood/IMXRT1062

firmware · tag-only

The grblHAL firmware build (Teensy 4.1 driver superproject + `core` submodule at `srw/combined`, incl. the WCS-rotation transform fix) the app connects to. Stays in the fork — build branch `srw/local-build-config`, frozen reference at tag `pr-era-cutoff`.

Features & Fixes

Fork [stevenrwood/ioSender](#) · base branch `master` · **215 improvements in the integration build**.
The fork ships as one all-in-one build — every change below is already in the `integration` branch and consumed wholesale. · all LF-normalized (`.gitattributes * text=auto eol=lf`).

Features at a glance — grouped by area. **NEW** new capability, **CHG** changes existing behaviour, **FIX** bug fix. Numbers link to the detail below.

Connectivity & reliability

Connect to USB / Ethernet / simulator, with a Connect/Reconnect menu, remembered host and opt-in prefer-network	NEW	15
Validate controller — streams a capability-tailored test in check mode (no motion), reports pass/fail + 3D preview	NEW	16
Restore main-window <i>position</i> across launches (was size only)	CHG	17
Survive connection loss / SD-card swap — guarded writes + auto-reconnect instead of crashing	FIX	4
Telnet / websocket modal-dialog UI deadlock	FIX	24
<code>-forgetNetwork</code> startup flag — ignore the saved connection target for one run and open the connect dialog (scan the network / pick any transport) instead of auto-connecting the remembered host; non-destructive (the saved value is untouched, and re-learned from the controller's \$I on the next serial connect)	NEW	66
Demo-video capture aids (<code>-demomarker</code>) — an opt-in timestamped marker log (<code>SESSION_START</code> / <code>RUN_START</code> / <code>RUN_END</code> / <code>TIMELAPSE_ON/OFF</code>) plus a run-bar <i>Timelapse</i> toggle, so a video compositor can sync the app screen-recording to the machine-camera footage and time-compress the long cuts; hidden and near-free when off	NEW	67
OBS auto-record bridge & tool-change cut markers — with <code>-demomarker</code> , ioSender drives OBS Studio over obs-websocket (auto Start/Stop recording on program load / end, so a shoot needs no manual Record button); <code>RUN_START</code> / <code>RUN_END</code> now bracket the actual cutting, with a tool change emitting <code>RUN_END...RUN_START</code> around the M6. Plus <code>build.ps1</code> forwards trailing flags to the launched app	NEW	68
Per-Monitor V2 DPI awareness — the app reads the <i>live</i> per-monitor DPI (like Edge / VS Code) instead of a system-DPI value cached at logon, so it renders at the correct scale regardless of resolution / scale changes and is no longer thrown off by a stale DPI cache; adds <code>-debuglog=dpi</code> diagnostics	NEW	69

Jogging & main page

Configurable main page — Edit Main Page editor, pinnable flyouts, assignable jog panels, per-offset Go/Set buttons	NEW	9
Native Xbox / game-controller support — analog-stick jog, remappable buttons, live Controller tab	NEW	8
3D view: Ctrl+click to jog (retracts Z first) + per-axis \$23 orientation fix	NEW	20
Keyboard jog keeps working when focus drifts off the Job view	CHG	22

High-DPI / 125–150% text-scaling layout	CHG	7
Assignable <i>Jog distance</i> +/- controller actions — step the jog distance preset (separate from jog speed)	NEW	35
Run-bar jog preset spinners — read-only <i>Dist</i> / <i>Feed</i> up/down selectors (wrap-around) on the Check line; startup splash stays on top so the full init sequence is visible	NEW	45
Drag a tab header left/right to reorder tabs — main bar and every sub-tab strip; the order persists across restarts (and agrees with the Edit Main Page editor)	NEW	60
Jog commands now wait for the previous \$J's ok before sending another - rapid clicks were able to send an overlapping \$J and wedge the controller (no response to anything, not just jog, until a power cycle).	FIX	121
Analog stick jog now runs on a dedicated background thread instead of the UI dispatcher - eliminates stutter during a continuous hold.	FIX	128
The run bar's "Cycle Start" button is now just "Run"; a small dropdown next to it replaces the old right-click menu for choosing Dry Run / Check Run	CHG	161
The status message no longer enlarges then shrinks 10s after every update (which shifted the whole window layout) - the font is now permanently large and a new message instead flashes the bar background light green (or light red for an error/alarm) for 5s.	CHG	163
The always-visible pinned-position flyouts (G28/G30/G59.3/etc.) no longer overlap the top tab labels; their vertical offset is now measured from the tab strip's real rendered height instead of a hand-tuned guess.	FIX	170
The Feed rate panel could only show a couple of digits of a 4-5 digit feed; the run bar trades its static unit label for a tooltip.	FIX	203
Mashing a D-pad direction or the run bar jog pad could leave the controller answering nothing at all; the guard against that now covers every input and can actually see its acknowledgement.	FIX	205
Thirteen top-level tabs cut to four — Setup, Job, Work Order, Offsets. The rest open as their own windows from File and Tools, and where each one lives is a layout slot you can change.	CHG	210
Hide the jog pad or just its five go-to buttons; the right-hand panels then fill one column instead of always spreading across two, and stop sitting under the flyouts.	CHG	213

Machine setup & settings

Machine Setup Wizard — guided first-run machine description (catalog, home-corner picker, per-axis table)	NEW	21
grbl:Settings — change-from-startup highlight, granular revert, per-Save restore points, bitfield tooltips	NEW	18
Stepper calibration (scratch) tab — long-span V-bit steps/mm	NEW	5
Safe-Z on Go To — lift / traverse / descend instead of a diagonal rapid	CHG	23
Editable G28/G30 predefined offsets (Set rapids to target, then stores)	CHG	26
Named G28 fixtures — a saved library of named machine positions in the G28 flyout (Set stores where you are, Go rapids back with Safe-Z); for recurring jigs & vices	NEW	70

Machine Setup restructure — Settings split (Grbl/App), new Tools tab, guided step-tabs + startup gate	NEW	28
Settings redesign — flat tab strip, free-text \$-setting search (with match nav), grbl-settings autosave, dialog editors folded in as tabs	CHG	42
Per-user config folder + standalone .xml folded into App.config sections (ConfigPanel<T> wizards, curated defaults); console output search + font size, shared reset footer, bindable ResetAndUnlock	CHG	43
Lathe mode toggle — App > Main checkbox enables/disables lathe mode, adding or removing the Lathe wizards tab (restart to apply)	NEW	47
Restart-needed cue — the Restart button pulses red while a restart-only change is pending and offers to relaunch when you leave Settings	CHG	48
Connect: Network default + Scan network — finds grblHAL controllers on the LAN (confirms each by a ?/\$I handshake, not just an open port) and lists them in an editable host picker	NEW	59
grbl:Settings tree now populates when opened after connecting — an early activation during the connect handshake loaded the settings group-less (before \$I reported enum support), so the grblHAL settings tree never built; it now fetches the group metadata once enums are known and rebuilds the tree on entry	FIX	61
... and the early activation itself is now suppressed at source — the Settings view ignores its inner tab-strip's startup selection churn until the view is actually shown, so Activate can no longer fire mid-handshake (belt-and-suspenders over #61)	FIX	65
Capability-gated tabs own their own "unavailable" reason — each gated view declares why it's missing, so the removal and the <i>Edit Main Page</i> listing can't drift (fixes the SD Card "needs SD" vs. "needs a filesystem" mismatch)	CHG	80
Restart prompt no longer stranded behind the relaunch splash when applying a restart-only change	FIX	81
App.config and Grbl settings snapshots now share one day-retained Backups folder instead of a single .bak and a count-retained settings-backups folder.	CHG	91
New Fixture definitions library (named, typed workholding positions) in Machine Setup, consumed by Start Job's fixture picker - retires the old single-slot G28 named-position combo.	NEW	94
GCodeProgramComments extracted as a shared parser for a loaded program's (TOOL)/(STOCK) comments, reused by touch-plate edge-radius compensation and CarveView's 3D carve simulation; touch-plate diameter fix.	FIX	96
Restore-from-file now previews only the rows that would actually change, colors them live as it applies, and offers automatic rollback on a mid-run failure; the G28 flyout gained a read-only fixture-position picker; every generated macro is now saved to disk; fixed a real crash switching to the Start Job tab.	NEW	104
3D probe/touch plate dialogs now both measure overall length (body/collet top to tip)	CHG	107
Lathe Wizards availability now follows the controller's own Mode-of-operation setting, not a separate ioSender toggle	CHG	108

Machine tab shows connected grblHAL version/build and can check GitHub for a newer SRW-fork build, then flash it	NEW	118
Corner Fence schematic is now a real 3-zone red/green/cream diagram sized off the active 3D probe; Position row gets a checkmark + directly-editable X/Y/Z fields instead of a raw coordinate string.	CHG	143
Clicking Machine Setup while the machine was moving (e.g. right after a G30) could freeze that tab for the rest of the session.	FIX	144
Settings > Restart now actually relaunches ioSender instead of just closing it; the unused AppLaunch.exe relaunch supervisor is gone	FIX	148
Title bar silently checks GitHub for a newer release and appends "(update available)"; Settings > Simulator's up-to-date status now updates live as options are toggled, not just on tab-show.	NEW	169
Offsets tab rebuilt as an inline-editable grid (Clr/Get MPos columns, orange/blue unsaved-vs-saved coloring, restore-to-startup) with corrected G28/G30/G92 commit behavior	NEW	171
Top-level tabs reordered around the daily workflow; Settings App/Jogging/G Code tabs get resizable columns; Simulator tab redesigned for readability.	CHG	179
Machine Setup's firmware section trimmed to two info lines + one Check for Updates button; results move into a message box with real per-release changelog text and custom Flash Firmware/Cancel buttons.	CHG	181
ioSender itself reads no environment variables anymore - OBS demo-recording config moves into Settings > App > Camera, the AI review key into a registry-backed SecretStore with a Set/Update button, and the simulator's GitHub token is a compiled-in scoped PAT.	CHG	182
Settings > App > Camera > Demo recording (OBS) gets a Validate button that connects to OBS now and confirms each configured source name actually exists.	NEW	183
Check for Updates now queries GitHub's real /releases/latest for firmware instead of a hand-rolled rolling tag, so a successfully-flashed build is correctly recognized as up to date.	FIX	187
The two standalone stepper-calibration wizards are gone; calibration is now a step inside Machine Setup alongside squareness.	CHG	197
Three fixes to the fixture editor - Test position no longer drives back to a stale saved point, the 3D Probe / Touch Plate choice survives closing, and dismissing the dialog no longer minimizes the main window.	FIX	206
Both tabs now use a searchable category tree instead of tab strips - every config panel is its own page, and search matches the words on the page, not just page names.	CHG	208
A search hit found in a tooltip now says which control that tooltip belongs to, so the answer is "hover Send comments", not "it is on this page somewhere".	CHG	209
How the app looks and behaves moved off the Application page into its own General page; the dead Theme dropdown is gone.	CHG	211
SD Card, Probing, Height Map and Lathe Tools were listed in the Tools menu but greyed out and unclickable; the two that could be opened then crashed on the way in.	FIX	215

Commissioning & workflow tools

Surface Spoilboard — machine-referenced facing (Z-only touch-off, Reuse Z0, finish pass, leveling check)	NEW	29
Load Stock — corner-probe stock size/flatness/skew/thickness, results popup, Copy size → Fusion add-in	NEW	30
Squareness (Auto Square) — drill an L, measure, write the ganged-axis squaring offset + re-home	NEW	31
Probe definition diagrams — per-type schematic in the probe editor labelling the measurements to enter	NEW	34
Probe input follows the selected probe type — tool setter → Q1, else the main probe → Q0 (guards a stale selection)	FIX	36
Start Job (was Load Stock) — first tab, connection-gated tabs, auto 3D-probe at the front-left origin, writes <code>start_job.macro</code> ; new Verify skew pass (re-touch each corner in the rotated frame); flyout persistence & offset-Set fixes	NEW	44
Tools tab guidance — each Tools tab (tool table, spoilboard surfacing, scratch calibration, Trinamic, PID) now shows an on-screen “About” explainer of what it does and how to use it	NEW	52
Start Job tab no longer strands + program view stays a right column — a probe/hold that didn’t cleanly clear could leave a gated tab disabled with no way back; the generated program overlay no longer grows to cover the whole tab	FIX	57
Probing & Tools sub-tabs share one look — instructions on the ambient grey, results in a white panel, consistent across the four Probing tabs and Stepper calibration	CHG	62
Check mode (\$C) moved off the status bar to a checkable Cycle Start right-click item — a dry-run / validate toggle now sits with the button that starts a run	CHG	63
Smoother, faster corner probing — post-trigger back-offs are gentle feeds (no rapid-accel table shudder) and the Z probes assume ≤ 1 ” stock for a much shorter seek	CHG	71
Start Job estimated stock size — setup fields relabelled <i>Est.</i> plus a new <i>Est. thickness (Z)</i> field that warns when stock exceeds 1”	NEW	72
Consolidate the Start Job corner probe to a single macro (pcorner) and add optional sacrificial spacer/backer support so a thin sheet is probed on the metal, not the backer.	NEW	85
With Measure on and the estimated size too large, corners that fall over bare spoilboard now abort at once instead of driving a doomed side probe into air.	FIX	86
Machinist Vise is now a working fixture kind: a dedicated corner-probe macro drives Set/Test position, Start Job generates a real program for it, and its schematic tracks the fixture's own Jaw width/Max opening.	NEW	98
Root-caused the vise Start Job error:71 storm (a dangling-paren comment corrupting the grblHAL parser) and a real MDI-queue pacing bug it exposed; added a jaw keep-out toolpath check, spacer-aware Z math, and Cancel-issues-Feed-Hold during a corner probe.	FIX	102
Touch Plate as an alternative probe for Start Job/vise Set position; partial vise Measure; fixed a real TLO-reference near-miss.	NEW	103

Root-caused the Machinist Vise corner 4/2 face-probe margin flip-flop (a physical tip-clearance problem, not size-estimate slop) and fixed it with a live tool-diameter lookup; dropped the readout-only corners 1/3; first clean end-to-end Machinist Vise Start Job run on real hardware.	FIX	105
Start Job tab left-aligned, vise labels say exact not estimated, vise corner-probe motion after TLO ref no longer over-travels	CHG	109
Generates an O-word-loop .nc file for reproducing the controller-wedge-on-Reset bug over Serial/Telnet	NEW	110
Measure auto-disables for Touch Plate + non-conductive stock (can't detect edges electrically); measured size/flatness/skew readout now follows the selected mm/in units instead of always showing mm.	FIX	113
New Settings > Simulator tab picks axes/probe/rotation and builds a grblHAL simulator (via the existing CI workflow) into %AppData%\Simulator; the Connect dialog's Simulator tab is now gated on that exe existing, and auto-launches it on Ok (and on startup auto-reconnect) if not already running.	NEW	114
Settings > Simulator now defaults to the connected controller's actual options (8 compile-time toggles incl. Toolsetter/Safety door/E-stop/Lathe UVW/Ganged+Auto-square Y), copies its live settings + ATC macros into the build, and Machine Setup gains a one-button "Build simulator matching this machine" step with the same status readout. Several IP/hang/status bugs found and fixed along the way.	NEW	115
Vise corners 1/3 (previously Z-only, jaw-blocked) now also probe the left-edge X face and feed a real measured WCS origin + left-edge skew; fixed a size_y averaging bug that silently halved the measured stock height, and a schematic bug that never showed vise corner Z labels.	NEW	117
Fixture edit dialog's OK button is now disabled for the duration of a vise corner probe - it could previously close (Enter or an impatient click) before the async probe finished, copying the stale pre-probe position back and losing the fresh result. The Fixtures-tab list's own "Set position" shortcut (silently wrong for a vise - no vise-empty check, no corner-probe macro call) is removed.	FIX	124
Vise schematic Z labels now read relative to the true jaw origin; Start Job no longer silently overwrites entered stock size from a loaded program (offers a Copy-from-STOCK button instead); Corner Fence corners travel at a known-safe height instead of always retracting to machine top; new opt-in exact-size mode probes corners tightly instead of from a padded estimate; fixed a real pcorner.macro sign bug (GT 0 vs NE 0) found along the way that affected the vise path too.	CHG	125
Cycle Start menu gains Dry run: offsets Z clear of stock and forces spindle/coolant off for the whole run regardless of program content - built after an incomplete in-progress implementation left the spindle live during a real test and tore a probe cable out.	NEW	134
Start Job's DISCOVER pass correctly descended to the fixture's saved reference Z, then searched ~70mm off instead of the expected ~12mm and alarmed (Probe fail) right before the real surface - a leftover G92 offset, never cancelled by the macros' own G54 clear.	FIX	136
After setting the TLO reference the machine crossed to corner 2 at Safe Z instead of Z0 (undoing an explicit retract); the schematic's per-corner Zstock	FIX	137

label and the modeless install-probe/PROMPT dialogs ignored the in/mm toggle and UiScale zoom respectively.

A real tool change mid-dry-run left dry run's Z-offset G92 active while tc.macro ran its own work-coordinate toolsetter move, pushing the target out of travel (Alarm:2) and leaving a stale hang-watchdog timer that force-reset the controller.	FIX	138
Touch-plate mode's DISCOVER corner skipped the safety rise to machine top entirely (it was bundled inside the 3D-probe-only spoilboard search block); corner 2's approach after setting the TLO reference now has the same structure as every other corner instead of a bespoke extra waypoint.	FIX	139
"Stock size is exact" was wired into Generate but never fed back into the field labels/hint text (stayed on "Est. ..."); touch-plate corners now show their own measured top Z on the schematic instead of a thickness value that mode can never actually compute.	FIX	140
G92 Zk does not set an absolute offset - it makes wherever the machine currently is read as work-Z=k - so a fixed "G92Z-17" only gave the intended clearance if the machine happened to already be sitting at the stock surface, which it never was; a machine parked ~67mm above the stock plus the intended 17mm gave an 84mm gap instead of 17mm.	FIX	141
Every Generate button now saves its program for post-mortem; fixed a real hardware ALARM:2 on Start Job's Corner 2 probe (renamed misleading "Corner travel margin" field to "Safe Z delta", warn below 10mm)	FIX	149
Corner Fence's origin-corner XY and the spoilboard Z are captured ONCE by Test position and reused every job, instead of re-locating them on every Start Job run	FIX	151
NumericField.Value is always mm now for mm/in fields; a new inheritable Imperial flag flips a whole panel's display units at once, and typed unit suffixes (1", .5in, 12.5mm) are accepted	NEW	152
Corner Fence/Start Job's X/Y face probes now search a fixed 5mm below the measured top instead of the material midpoint (top - thickness/2)	CHG	153
Edge length labels doubled 12pt->24pt; per-corner angle moved inside the box while thickness/Z stays outside, both at 22pt instead of one combined 11pt label	CHG	154
Calibrate steps/mm by probing a reference block of known true size against a Corner Fence, instead of V-bit scratch marks measured by hand; Start Job now warns when a measured exact size implies bad calibration	NEW	155
Start Job / Stepper Calibration (Probe) no longer randomly abort right after the G30 park move with "controller did not return to idle"	FIX	158
Stepper Calibration (Probe) now parks at G30 when done (was left sitting at Z0) and gets its own Safe Z delta field; any Generate'd program hides its preview automatically once it finishes cleanly	CHG	159
Start Job's fixture dropdown gets a built-in "G28 (loose probe)" entry recreating the original pre-Fixture-library workflow, for jobs that don't have (or don't want) a saved Corner Fence fixture	NEW	160
Start Job / Stepper Calibration (Probe & Scratch) / Auto Square / Surface Spoilboard no longer have their own Generate button – the shared Run bar	CHG	162

reads "Generate" (disabled until ready) then flips to "Run", with Dry Run/Check Run hidden while on those tabs.

Stepper Calibration (Probe) gains a Calibrate: XY steppers / Z stepper (1-2-3 block) toggle - probes the spoilboard once as a baseline, then the block's three sides in turn, fitting a new Z steps/mm by least-squares across all three measurements. Can reuse the last saved starting position to skip the manual jog on repeat runs.	NEW	164
Machine Setup's two optional wizard steps now color green instead of staying blank, and share the same macro-status query the SD/ATC gate uses.	FIX	167
The shared Run bar's green "press me" highlight came back for the "Generate" label, not just "Run"; Stepper Calibration's Z-gauge reuse-saved-position path now waits for the descend move to genuinely finish before probing.	FIX	173
All 5 Tools tabs' labeled inputs now colon-align on a shared column instead of each field's box hugging its own (possibly short) label; each tab's generated .macro file is now named for its own top-level selection (axis/fixture) so switching modes and generating no longer silently overwrites the other mode's saved copy.	CHG	174
Run > Simulate switches the live connection to the bundled simulator for one job, then reconnects to the real controller automatically when it ends.	NEW	176
Fusion 360 add-in (renamed ioSenderV2, one panel/two commands) exports CAM feeds/speeds to JSON; a new Feeds & Speeds tab analyzes it (material table + machine limits + optional AI review) and writes an apply file back; Help > Support gets a one-click add-in installer.	NEW	178
Esc/Ctrl+C during Ask AI to review now aborts the in-flight ~20-30s request immediately, with a Cancelling... line logged the instant the key is pressed.	FIX	184
Probing's "Max search distance" (G38.2 travel limit) is now editable right on Tool length offset, Edge finder (external/internal) and Center finder, instead of only via Machine Setup > Probe definitions.	NEW	188
Odd Jobs — describe a small job as toolpaths (line/circle/oval/square/rect) with operations under them (pocket, contour, drill, bore, chamfer, finishing) and it compiles to one program with a sane tool order	NEW	192
Work Order is now a top-level tab (New/Load menu items added); Setup's Touch Plate probing follows the selected Material's conductivity; tc.macro can use a fixed touch-plate block instead of a toolsetter.	CHG	193
New 4-flute chamfer bit option and a per-operation Climb/Conventional cut direction (correct internal/external orbit math) on Work Order operations, plus a Settings:App spindle-direction-capability setting for hardware that can't run both directions; shared day-of-week rotation for the debug/console/crash logs and App.config/Grbl backups; fixed a Spindle-panel crash.	NEW	195
Surfacing is a Work Order operation now, including Entire Spoilboard — not a separate wizard with its own idea of where the board is.	NEW	198
The fixed built-in tool enum is retired for a single editable tool list you can add your own tools to.	CHG	199
A run of real-hardware bugs: rapids from a false origin, traverses at cutting height, a dry run that did not protect, and alarms that did not abort.	FIX	201

Probing conductive stock with a real touch plate silently dropped the plate thickness and lip compensation — 12 mm of Z error.	FIX	202
Stepper calibration, Squareness and Surface spoilboard leave the Tools tab for where they already live; the tab itself disappears when the controller supports none of what remains.	CHG	204
Files, SD card & ATC		
Load Folder — assemble per-toolpath .nc files into one outlined program (+ Fusion add-in)	NEW	6
SD + LittleFS browser & file manager — multi-filesystem, View/Edit/Create/Upload via Notepad	NEW	14
SD Card first-line cleanup — the filesystem status no longer overlaps the checkbox, and the free-space banner is hidden when the controller reports no sizes (was a bare "mounted")	FIX	51
ATC tool-change macro provisioning — Install ATC macros + seeded Start Job	NEW	25
On an ATC controller the setup gate could dump you at step 6 even though the macros were installed and turned green a moment later	FIX	88
The Machine Setup ATC-macro check now catches a 0-byte or truncated tc/pcorner/pvisecorner.macro on the controller - it used to read as Installed since only the file NAME was checked, not its size, so M6 T8 silently ran the firmware's default tool change instead of the macro.	FIX	123
SD Card tab queries its own mount status on activate instead of bailing out to "No card" before the controller has actually reported one.	FIX	168
Machine Setup's macro-provisioning gate no longer false-trips when a realtime status report interleaves with the checksum read.	FIX	175
Dead time between Setup steps removed, corner retreats cut from 20mm to 5mm, and the ATC macro update no longer wedges the app until it is restarted.	FIX	207
Program view & G-code		
Reusable program view — file / folder / each wizard gets its own view; one Cycle Start runs the active one	CHG	32
Background file / folder loading — big programs parse on a worker thread; the UI stays responsive, rows fill as read	CHG	32
Continuous block numbering — explicit N words shown in the Block column and hidden from the G-code column	CHG	32
Explain G-code on hover — plain-language per line/selection (decodes parameters, O-word CALLs, expressions); click the balloon to copy	NEW	33
One in-place streaming path — every wizard/macro runs in its own view; a run never overwrites the loaded job	CHG	37
Live 3D carve view — watch the stock get machined away (program-sized stock, real cutter profile flat/ball/V-bit, Play / Cycle Start playback) instead of just toolpath lines	NEW	41
3-line run view — on Cycle Start a generated program collapses to previous / current / next line at the bottom of the tab; click the title bar to expand	NEW	76

Save program... now works for a wizard's generated preview, and the floating Program popup no longer shows a redundant second copy of the loaded job already docked in the Job tab.	FIX	93
The Fusion ioSenderBatchPost add-in always combines every operation into one .nc; Load File now recognizes its section markers and shows the same collapsible outline Load Folder used to, so Load Folder is retired.	CHG	97
(TOOL) comments carry a tool's overall length (L=), read from Fusion and exposed per-program	NEW	106
The Program view overlay (Load File/Folder, wizard output) was a fixed 560-720px panel that ran over half the client area on a narrower window - now always exactly the right third.	FIX	112
Double-click any Job-view center tab's header (Program, 3D View, Console) to pop it into its own borderless window, resizable and Ctrl+Alt+=/- zoomable; double-click that window's title bar to dock it back. Replaces the old Console-only popout special case.	NEW	116
ioSenderBatchPost now remaps Fusion's Air/Mist coolant setting to Flood before posting - grbl.cps has no code for Air/Mist and raised "Unsupported 'air' coolant", failing every operation using it.	FIX	122
Feed rate/Spindle/Outline could stretch wide enough (Outline's wrapped warning text especially) to squeeze the Program/3D View/Console workspace.	FIX	145
Hovering a program-list line now reliably explains THAT line (was matching an unrelated line's tokens); Machine/Program limits read as one compact interval per axis instead of two full-width fields.	FIX	177
The cut-trail line in the 3D carve view was invisible in every state; stock top-face color lightened for contrast.	FIX	180
Work Order's Run hands its program to the Job tab as the real loaded job (pops back after); Load File no longer freezes on a large file.	CHG	194
Setup no longer crashes on a first-ever/cold session; a Work Order run's live ok/* status now shows in the real docked Job tab list instead of a floating panel.	FIX	196

Macros, console & keys

Macro manager dialog (grid, F-key assign, confirm-on-run flag) + run-only macro flyout	NEW	10
Macro pre-processor directives — PREREQ / MBOX / WAITIDLE / PROMPT / @path	NEW	11
In-app Key Mappings editor + console state persistence	NEW	3
Console: inline terminal command prompt + output right-click menu (Clear / Save)	NEW	19
Bind any main + second-level tab to a key — right-click Bind-to-Key + header badges	NEW	79
Start Job no longer writes a start_job.macro file or seeds a catalog entry - it already ran entirely in-memory like the other Generate/Cycle Start wizards.	CHG	92
Two probe-tip-losing collision bugs fixed in pcorner.macro (found probing a Corner Fence fixture on hardware); MacroProcessor now truncates an	FIX	99

oversized auto-generated comment instead of having the controller silently reject the whole line.

Console tab now mirrors to a durable, timestamped log file per run - survives a UI freeze or a firmware debug flood that used to leave no record behind. **NEW** 111

Console shows a controller restart-after-hang notice (with a report-it dialog) and a firmware-change notice, right on reconnect. **NEW** 126

OBS Control panel + F7-F12 hotkeys start/stop the 2 Tapo RTSP cameras and the app screen-capture source individually, filing each take into a named subfolder. **NEW** 142

Works through the UI feedback Phil Barrett sent after his first sessions with V2. **CHG** 190

One Top Level Tabs group holds every tab-strip and menu destination; a key reaches its target wherever it currently lives, menu commands can be bound too, and the menu shows the key. **CHG** 212

Polish, onboarding & docs

Numeric fields select their value on focus — tab or click into any number field and just type the replacement (no clearing first); single-digit edits still work **CHG** 58

High-DPI polish — fixed pixel sizes converted to Min/Auto so text doesn't clip at 125–150% scaling **FIX** 46

Lathe wizards rebuilt to the app layout idiom — the 5 upstream absolute-Margin wizards re-hosted in scaling StackPanel/Grid so they no longer clip/overlap at 125–150% **CHG** 49

Tab strips fill their width — a StretchTabControl spreads each tab header proportionally across the row so tabs read as distinct (main bar + Settings / Tools / Lathe / Probing / Machine Setup) **CHG** 50

Online user manual + in-app context help — F1 (and the Help menu) open a task-oriented manual with novice / intermediate / machinist reading tracks, A–Z index, search, diagrams and screenshots; hosted at iosenderv2.github.io/ioSender **NEW** 56

Onboarding tooltips — plain-language controller-state field + per-setting help **NEW** 12

UI localization — all UI strings registered for 7 locales (cross-cutting) **NEW** 9, 10, 12, 14–16, 18, 19, 21, 23

Center owner-less modal dialogs (MPGPending, ProbeVerify) **FIX** 27

Show Motor Fault / Warning signals in the Signals display **FIX** 2

Build documentation — Mega-XL upgrade notes + repeatable tool-change guide **NEW** 13

Assorted released-ioSender bug fixes (RP.Math build, LF endings, CSV null-ref, boolean settings, null-comms) **FIX** 1

Headless build — `build.ps1` + VS Code tasks build/launch without opening the VS GUI (MSBuild found via `vswhere`); unhandled exceptions now dump to `%AppData%\ioSender\ioSender.crash.log` and exit `0xFA11` instead of blocking on a dialog **NEW** 53

Opt-in diagnostic trace log — launch with <code>-debugLog</code> (or <code>IOSENDER_DEBUGLOG</code>) to write a timestamped flow trace to <code>%AppData%\ioSender\ioSender.debug.log</code> ; off by default, so <code>DebugLog.Write(...)</code> call sites can live permanently in the code without a rebuild toggle	NEW	64
Code renamed <code>LoadStock</code> → <code>Start Job</code> to match the UI throughout (files, classes, <code>ViewType</code> , layout keys, config section)	CHG	54
Localization catch-up — later V2 features (<code>Start Job</code> , probing-redesign dialogs, main-page editor, Tools guidance, ...) were <code>x:Uid</code> d but had no <code>LocBaml</code> rows; every missing string backfilled into all 7 locale CSVs	NEW	55
Playbooks — the repeatable dev procedures (changelog entry, PDF/manual publish, builds, localization, firmware, demo video) collected into <code>docs/playbooks/</code> , one per file with ready-to-run steps	NEW	73
Startup dialogs no longer hidden behind the splash — the progress splash docks to the top so the connect dialog, message boxes and setup prompts stay visible	FIX	74
Status-bar messages shown at double height for 10 s when written, then shrink back — so an important message in the easily-missed status line gets noticed	NEW	75
Selected tab label goes bold and slightly larger — the active tab reads at a glance, not just by its white background (every <code>StretchTabControl</code> bar)	CHG	77
Run-bar jog pad restored — it had been squeezed to nothing by the Program button; run bar rebalanced into four columns with the button row filling the slack up to the jog pad	FIX	78
The deterministic dev playbooks are now one-command scripts — push to both remotes, regenerate the Overview PDF, run <code>gh</code> , and generate a changelog entry — so they are invoked, not re-derived each time	NEW	82
One live instance, a clean supervised restart, and opt-in crash reports with a minidump.	NEW	83
File menu dissolved onto the program view + right-click menu; toolbar row removed; Camera menu made opt-in.	CHG	84
Optional localhost server that drives the WPF UI by <code>x:Uid</code> so a change can be verified end to end without a human clicking	NEW	87
The optional test server grew from a proof slice into a real automation harness, and moved into its own app-agnostic assembly	NEW	89
The app-agnostic UI test server moved out to its own public repo and NuGet package; <code>ioSender</code> now consumes it as a package.	CHG	90
<code>UiScale</code> (the DPI/zoom setting) now applies to every modal dialog window, not just <code>MainWindow</code> .	FIX	95
<code>WpfUiTestServer</code> (v1.2.0) gains <code>POST /handoff</code> (shows a popup, drops the banner, and stops the server) so an agent can hand a UI it	NEW	100

drove back to the operator with instructions; /idle now waits for an actual composed frame, not just a drained dispatcher queue.

Locale rows added/removed for every new or retired x:Uid this round (Fixture definitions, Fusion outline parity, Machinist Vise, Start Job's unit toggle and Jaw width/Max opening) across all 7 locales.	CHG	101
---	-----	-----

One-line PowerShell installer (<code>irm ... /install.ps1 iex</code>) + rolling-release CI so a new user never touches Visual Studio or a build	NEW	119
---	-----	-----

Check for Updates now offers "Update now?" instead of just opening the releases page; new Help > Support > Roll back to previous version undoes the last update	NEW	120
---	-----	-----

Message boxes are now the app's own scaled window instead of the native OS dialog, so they read on a high-DPI display at whatever zoom Ctrl+Alt+Plus/Minus is set to.	NEW	127
---	-----	-----

Tooltip text now scales with UiScale zoom instead of staying fixed-size, unreadably small at high zoom.	FIX	129
---	-----	-----

-simulator connects to the bundled simulator on startup, launching it first if needed - joins the existing -port/-baud flags for serial/network.	NEW	130
--	-----	-----

-testserver launches no longer collide with (or steal focus from) another running instance; -simulator <port> picks which port the simulator listens/connects on, so parallel agents don't fight over one.	FIX	131
--	-----	-----

A fresh -testserver launch no longer grabs OS foreground focus from whatever the operator is doing, and WpfUiTestServer's /screenshot stays fully functional (previously trading one for the other).	FIX	132
--	-----	-----

ToolTips added to SpindleControl, Goto/Outline action buttons, the Macro Manager/Editor dialogs, and PortDialog's network connection settings.	NEW	133
--	-----	-----

ConsoleLog, DebugLog and the crash logger each reimplemented the same file-path resolution and 8MB rotation - now share one CNC.Core.LogFile; the crash log previously had no size cap at all, and console_*.log gains a live "latest_console.log" hard link.	CHG	135
---	-----	-----

AppMessageBox's text bumped 13pt -> 19.5pt (+50%), fixing every AppDialogs.Show call app-wide at once.	FIX	146
--	-----	-----

-message=text pops up an informational dialog once the main window is revealed - handy for telling someone what to test when launching a build for them.	NEW	147
--	-----	-----

Drag to resize the setup/drawing split on Start Job, Height Map, and 7 Probing/Tools sub-tabs, plus the Job tab's left sidebar / centre workspace / right sidebar	NEW	150
---	-----	-----

Every push to master now publishes a real GitHub Release (2.1, 2.2, ...) with notes listing which #N changelog entries shipped in it, instead of overwriting one unversioned rolling build; the TOC gains a Version column showing which release each entry arrived in	NEW	156
--	-----	-----

Release notes' install one-liner is now wrapped as powershell "irm ... iex" so it runs from cmd.exe as well as PowerShell; the main window's title bar showed a stale hardcoded "2.0.1" instead of the actual published release version	FIX	157
Check for Updates on a local dev build (no embedded version to compare against "latest") now lists every published release with an installable ioSender.zip and lets you pick one to install over the dev build's own bin folder, for quick comparison against a real published build.	NEW	165
New color-by-function design system (AppleStyles.xaml) applied app-wide - one primary button per screen, pill-style nav tabs, colored panel-title dots.	NEW	166
App-wide oval checkbox style, NumericField read-only styling + one-time alternate-unit peek, tab-header-drag no longer leaves sibling flyouts/content repainting, two stale status-message fixes	CHG	172
Closing the window while a job is running/paused now explains why instead of silently refusing; a WPF crash typing fast in the Grbl settings search is fixed; hover tooltips for a line like T1M6 now read in the same order the words appear.	FIX	185
Every real screenshot in the User Manual gets a novice-friendly bullet breakdown of its visible UI regions; new tools for a multi-shot reshoot round-trip.	CHG	186
A saved keymap entry missing its Method no longer crashes startup; a probing-triggered status message can no longer crash the app from a background thread; the console shows the controller's \$I response and typed \$ commands again, while internal \$CWD housekeeping traffic stays quiet.	FIX	189
Dragging a tab header no longer crashes the app or strands it with an invisible page and a stuck cursor.	FIX	191
A missing section now inherits the shipped template's curated value, and one unreadable section can no longer take every other section down with it.	CHG	200
A tab that multiplied on every launch, a setup prompt that reappeared for ever, Esc stolen from every window, and a scroll wheel that only worked over the scrollbar.	FIX	214

#	Change	Diff
Version 2.1		
1	Bug Fixes for released ioSender	Files: 5 0 0 Lines: +28 -10
2	Surface Motor Fault / Warning signals	Files: 2 0 0 Lines: +5 -32
3	Console persistence + Key Mappings editor	Files: 12 0 +4 Lines: +1224 -15

4	Connection-loss handling + auto-reconnect	Files: 10 0 0 Lines: +522 -63
5	Stepper calibration (scratch) tab	Files: 13 0 +3 Lines: +773 -2
6	Load Folder + Fusion batch-post add-in	Files: 28 0 +8 Lines: +1634 -8
7	High-DPI / large-text layout	Files: 27 0 0 Lines: +126 -109
8	Xbox controller + Key Mappings editor polish	Files: 14 0 +4 Lines: +2255 -687
9	Configurable main page + flyouts + jog panels (XL)	Files: 31 0 +20 Lines: +2835 -119
10	Macro manager + run-only flyout	Files: 16 0 +2 Lines: +598 -26
11	Macro Processor Enhancements	Files: 8 0 +1 Lines: +723 -21
12	Onboarding tooltips	Files: 14 0 0 Lines: +283 -28
13	Build documentation (Mega-XL notes + tool-change guide)	Files: 1 0 +8 Lines: +2662 0
14	SD + LittleFS file browser & file manager	Files: 12 0 +3 Lines: +945 -135
15	USB / Ethernet / simulator connection support + Connect menu	Files: 26 0 +3 Lines: +1151 -68
16	Validate controller (check-mode g-code conformance test)	Files: 19 0 +1 Lines: +1208 -38
17	Restore main window position across launches	Files: 2 0 0 Lines: +60 -7
18	grbl:Settings — live edits, change highlight, revert & snapshots	Files: 12 0 +2 Lines: +659 -43
19	Console — inline terminal-style command prompt	Files: 13 0 0 Lines: +220 -21
20	3D view — Ctrl+click to jog + per-axis orientation	Files: 5 0 0 Lines: +206 -60
21	grbl:Settings — Machine Setup Wizard	Files: 12 0 +3 Lines: +1740 -1
22	Keyboard jog — keep active when Job-view focus drifts	Files: 2 0 0 Lines: +23 -1
23	Go To — optional safe-Z (lift, traverse, descend)	Files: 10 0 0 Lines: +54 -8
24	comms — fix telnet/websocket UI deadlock	Files: 2 0 0 Lines: +29 -10

25	ATC tool-change macro provisioning (Install ATC + Start Job)	Files: 7 0 +5 Lines: +804 -10
26	Offsets — editable G28/G30 (Set rapids & stores)	Files: 1 0 0 Lines: +21 -2
27	Dialogs — center owner-less modal dialogs	Files: 4 0 0 Lines: +4 -2
28	Machine Setup restructure + Tools tab + setup gate	Files: 4 0 +2 Lines: +237 -21
29	Surface Spoilboard — machine-referenced facing tool	Files: 2 0 +2 Lines: +673 0
30	Load Stock — corner-probe stock measurement	Files: 7 0 +7 Lines: +1125 0
31	Squareness (Auto Square) — ganged-gantry offset tool	Files: 2 0 +2 Lines: +686 0
32	Program view as a reusable object + background loading	Files: 20 0 +4 Lines: +830 -184
33	Explain G-code on hover (novice tooltips)	Files: 4 0 +1 Lines: +805 -39
34	Probe definition diagrams	Files: 2 0 0 Lines: +142 -22
35	Jog distance +/- controller actions	Files: 4 0 0 Lines: +17 -2
36	Probe input follows the selected probe type	Files: 3 0 0 Lines: +16 0
37	One in-place streaming path (stayPut removed)	Files: 3 0 0 Lines: +62 -110
38	Match the bundled simulator to the connected controller	Files: 2 0 0 Lines: +355 0
39	Re-establish modal state on a mid-program start	Files: 1 0 0 Lines: +22 0
40	Load Stock "apply work rotation" defaults off	Files: 1 0 0 Lines: +6 -1
41	Live 3D toolpath + material-removal carve view	Files: 4 0 +2 Lines: +1107 -62
42	Settings redesign — flat tab strip + searchable Grbl settings	Files: 23 2 0 Lines: +935 -542
43	Per-user config folder + standalone config folded into App.config	Files: 27 0 +3 Lines: +1269 -369
44	Start Job workflow + Verify skew, flyout & offset fixes	Files: 17 0 0 Lines: +369 -182
45	Run-bar jog preset spinners + startup splash + MDI Send align	Files: 4 0 +2 Lines: +132 -9

46	High-DPI audit — text no longer clips at 125–150% scaling	Files: 63 0 0 Lines: +196 -197
47	Lathe mode enable/disable checkbox	Files: 3 0 0 Lines: +56 -0
48	Restart button pulse + restart-on-leave prompt	Files: 2 0 0 Lines: +58 -1
49	Lathe wizards rebuilt to the app layout idiom (high-DPI)	Files: 5 0 0 Lines: +461 -387
50	Tab strips fill their width (StretchTabControl)	Files: 7 0 +1 Lines: +137 -14
51	SD Card first-line cleanup (overlap + free-space banner)	Files: 2 0 0 Lines: +9 -4
52	Per-tool guidance text on the Tools tabs	Files: 7 0 0 Lines: +46 -14
53	Headless build script + crash logging	Files: 2 0 +2 Lines: +255 -8
54	Rename LoadStock → Start Job (code matches the UI)	Files: 30 0 0 Lines: +177 -177
55	Localization sweep — V2 strings into all 7 locales	Files: 29 0 0 Lines: +1581 -1
56	Online user manual + in-app context help (F1)	Files: 2 0 +1 Lines: +126 -2
57	Fixes: Start Job tab strand + program-view overlay width	Files: 3 0 0 Lines: +26 -1
58	Numeric fields select their value on focus	Files: 1 0 0 Lines: +35 -0
59	Connect: Network default + LAN controller discovery	Files: 9 0 +1 Lines: +527 -9
60	Drag to reorder tabs (persisted across restarts)	Files: 6 0 +1 Lines: +306 -8
61	grbl:Settings tree populates after connecting	Files: 2 0 +0 Lines: +37 -4
62	Probing/Tools sub-tab layout standardized	Files: 6 0 +0 Lines: +38 -30
63	Check (\$C) moved to Cycle Start context menu	Files: 11 0 +0 Lines: +48 -29
64	Opt-in diagnostic trace log (-debuglog)	Files: 3 0 +1 Lines: +179 -5
65	grbl:Settings premature activation prevented at source	Files: 1 0 +0 Lines: +19 -0
66	Startup flag -forgetNetwork	Files: 1 0 +0 Lines: +13 -0

67	Demo-video capture markers (-demomarker)	Files: 5 0 +1 Lines: +219 -1
68	OBS auto-record bridge + tool-change cut markers	Files: 5 0 +1 Lines: +211 -3
69	Per-Monitor V2 DPI awareness	Files: 3 0 +1 Lines: +79 -0
70	Named G28 fixtures	Files: 12 0 +1 Lines: +336 -3
71	Smoother, faster corner probing	Files: 2 0 +0 Lines: +30 -22
72	Start Job: estimated stock size & Z check	Files: 10 0 +0 Lines: +47 -16
73	Playbooks: one-stop procedure library	Files: 0 0 +14 Lines: +456 -0
74	Startup dialogs no longer hidden behind the splash	Files: 3 0 +0 Lines: +18 -17
75	Status-bar messages shown at double height	Files: 1 0 +0 Lines: +37 -0
76	Program view: 3-line run view	Files: 4 0 +0 Lines: +170 -2
77	Selected tab: bold, larger label	Files: 1 0 +0 Lines: +62 -1
78	Run-bar jog pad restored & row rebalanced	Files: 3 0 +0 Lines: +42 -39
79	Bind any tab to a key — right-click Bind-to-Key + header badges	Files: 13 0 +1 Lines: +716 -17
80	Capability-gated tabs own their own “unavailable” reason	Files: 12 0 +1 Lines: +129 -93
81	No more restart prompt hiding behind the relaunch splash	Files: 1 0 +0 Lines: +18 -1
82	Dev playbooks distilled to one-command scripts	Files: 5 0 +4 Lines: +384 -11
83	Relaunch supervisor, single-instance & crash reporting	Files: 5 0 +2 Lines: +850 -58
84	Main-menu overhaul	Files: 35 0 +0 Lines: +458 -65
85	Start Job: one probe macro + spacer support	Files: 19 2 +0 Lines: +80 -232
86	Start Job: fail fast over bare board	Files: 1 0 +0 Lines: +12 -4
87	UI test server (-testserver)	Files: 2 0 +1 Lines: +505 -1

88	Fix false Machine Setup step 6 (ATC macros)	Files: 2 0 +0 Lines: +17 -4
89	UI test server — full harness + independent assembly	Files: 96 0 +7 Lines: +1832 -241
90	UI test server — standalone repo + NuGet package	Files: 4 5 +0 Lines: +5 -1391
91	AppData: shared Backups folder replaces .bak + settings-backups	Files: 5 0 +0 Lines: +86 -112
92	Remove start_job.macro file + its seeded macro catalog entry	Files: 5 1 +0 Lines: +6 -87
93	Program view: fix Save for wizard previews + popup duplication	Files: 3 0 +0 Lines: +53 -65
94	Fixture definitions: named workholding positions replace the single-slot G28 combo	Files: 9 1 +3 Lines: +859 -337
95	Apply UiScale zoom to dialogs, not just MainWindow	Files: 10 0 +1 Lines: +42 -0
96	Shared program-comment parser; probe dialog tweaks; touch-plate diameter fix	Files: 7 0 +1 Lines: +165 -62
97	Fusion add-in: combine to one .nc; Load File gets outline parity; retire Load Folder	Files: 16 2 +0 Lines: +200 -848
98	Machinist Vise fixture: probe, Start Job generation, unit toggle, accurate drawing	Files: 13 0 +1 Lines: +1021 -342
99	pcorner.macro collision fixes; MacroProcessor truncates oversized comments	Files: 2 0 +0 Lines: +59 -29
100	WpfUiTestServer: /handoff releases control to the operator; /idle waits for a real paint	Files: 2 0 +0 Lines: +4 -4
101	Localization: locale rows for this round's new/removed UI strings	Files: 15 0 +0 Lines: +548 -321
102	Vise Start Job: error:71 root-caused, keep-out check	Files: 6 0 +0 Lines: +173 -21
103	Start Job: Touch Plate probing, vise partial Measure	Files: 22 0 +0 Lines: +513 -115
104	Settings restore redesign, G28 fixture picker, crash fix	Files: 18 0 +0 Lines: +327 -93
105	Vise touch-plate margin fix, first full run	Files: 1 0 +0 Lines: +94 -58
106	(TOOL) comment gains an L= tool-length parameter	Files: 3 0 +0 Lines: +88 -24
107	Probe definitions unified on an overall-length measurement, like (TOOL)'s L=	Files: 10 0 +0 Lines: +61 -30
108	Lathe mode auto-detected from the controller, manual toggle removed	Files: 4 0 +0 Lines: +26 -5

109	Start Job: align Probe/Stock-conductive rows, exact-size vise labels, tighten TLO-ref motion	Files: 3 0 +0 Lines: +55 -28
110	Reset-repro test-case generator (Help > Support)	Files: 9 0 +2 Lines: +308 -21
111	Durable console log; crash/debug logs consolidated	Files: 5 0 +1 Lines: +164 -16
112	Program view popup resized to exactly the right third of the client area	Files: 1 0 +0 Lines: +11 -4
113	Start Job Measure/units fit-and-finish	Files: 1 0 +0 Lines: +35 -9
114	Simulator settings tab + auto-launch	Files: 18 0 +2 Lines: +431 -21
115	Simulator settings: hardware match + ATC	Files: 25 0 +1 Lines: +1082 -65
116	Tear-off tabs (Job view)	Files: 1 0 +1 Lines: +164 -13
117	Vise corner 1/3 X-face probe, measured origin/skew, size_y fix	Files: 1 0 +0 Lines: +184 -23
118	Machine tab: firmware version + one-click update	Files: 12 0 +6 Lines: +1798 -0
Version 2.3		
119	One-line installer + rolling release CI	Files: 3 0 +3 Lines: +209 -37
Version 2.5		
120	One-click update now + rollback	Files: 9 0 +0 Lines: +54 -3
Version 2.6		
121	Jog buttons could send an overlapping unacknowledged \$J, wedging the controller	Files: 1 0 +0 Lines: +44 -0
122	Fusion batch post failed on operations using Air/Mist coolant	Files: 1 0 +0 Lines: +35 -0
123	A zero-length/truncated ATC macro on the controller read as Installed	Files: 1 0 +0 Lines: +54 -4
124	Vise Set position could close mid-probe and silently keep the stale corner	Files: 3 0 +0 Lines: +9 -27
125	Start Job/Load Stock accuracy pass: jaw-origin schematic, safer corner travel, exact-size tight probing	Files: 11 0 +0 Lines: +309 -53
Version 2.7		
126	Hang-watchdog restart notice on reconnect	Files: 6 0 +1 Lines: +197 -4

127	Scaled message boxes (AppMessageBox)	Files: 3 0 +2 Lines: +323 -2
Version 2.8		
128	Analog joystick jog was jerky under continuous hold - moved off the UI thread	Files: 1 0 +0 Lines: +52 -13
129	Tooltips now scale with the app's UiScale zoom	Files: 1 0 +0 Lines: +15 -1
130	New -simulator command-line flag to auto-connect to the bundled simulator on startup	Files: 1 0 +0 Lines: +33 -1
Version 2.9		
131	-testserver launches skip single-instance; -simulator takes an explicit port	Files: 3 0 +0 Lines: +37 -9
132	-testserver launches no longer steal foreground focus	Files: 2 0 +0 Lines: +71 -4
133	Medium-priority tooltips: spindle, goto/outline, macro dialogs, network connection settings	Files: 13 0 +0 Lines: +177 -16
134	Dry run mode + eliminate the MDI bypass path	Files: 18 0 +0 Lines: +282 -207
135	Consolidated log file creation/rotation/retention into one shared LogFile primitive	Files: 4 0 +1 Lines: +171 -97
136	pcorner/pvisecorner: spoilboard probe was searching from the wrong Z	Files: 2 0 +0 Lines: +15 -3
137	Start Job: corner-2 travel, unit-toggle readout, dialog scaling	Files: 2 0 +0 Lines: +17 -3
Version 2.10		
138	Dry run skips the program's own tool changes instead of running them	Files: 11 0 +0 Lines: +58 -13
139	Start Job: touch-plate Z0 rise, corner 2 approach height	Files: 2 0 +0 Lines: +50 -17
140	Start Job: exact-size labels, touch-plate corner Z readout	Files: 1 0 +0 Lines: +29 -4
141	Dry run: Z clearance math fix + token-accumulation over-suppression fix	Files: 2 0 +0 Lines: +56 -18
Version 2.11		
142	OBS/Tapo camera recording control, independent of OBS's main Record button	Files: 6 0 +4 Lines: +473 -3
143	Fixture edit dialog: redesigned Corner Fence schematic + directly-editable X/Y/Z position	Files: 21 0 +0 Lines: +526 -108
144	Machine Setup tab could go permanently unresponsive after a mid-move tab switch	Files: 1 0 +0 Lines: +25 -2

145	Job tab workspace lost width priority to the Feed/Spindle/Outline column	Files: 1 0 +0 Lines: +6 -1
146	Message box text was too small	Files: 1 0 +0 Lines: +1 -1
147	-message launch flag: show a popup once the app is up	Files: 2 0 +0 Lines: +62 -0
Version 2.12		
148	Restart-to-apply fix; AppLaunch removed	Files: 5 8 +0 Lines: +32 -425
149	Generate-to-disk logging; Safe Z delta fix	Files: 7 0 +0 Lines: +48 -18
Version 2.13		
150	User-draggable GridSplitters: Start Job, Height Map, Probing/Tools sub-tabs, Job tab's 3 regions	Files: 10 0 +0 Lines: +120 -59
151	Start Job probes the fence's origin corner once instead of twice	Files: 7 0 +0 Lines: +276 -54
152	NumericField stores canonical mm internally; unit toggle is display-only	Files: 5 0 +0 Lines: +221 -54
153	pcorner.macro side probes at a fixed 5mm below top, not the stock midpoint	Files: 1 0 +0 Lines: +16 -13
154	Start Job stock schematic: bigger, clearer dimension/angle/thickness labels	Files: 1 0 +0 Lines: +39 -20
155	New Tools sub-tab: Stepper Calibration (Probe) + Start Job calibration-mismatch warning	Files: 7 0 +2 Lines: +683 -4
Version 2.15		
156	Versioned releases (2.N) with real changelog notes	Files: 5 0 +1 Lines: +217 -58
Version 2.19		
157	Install command CMD-compatible; window title version fix	Files: 3 0 +0 Lines: +13 -8
Version 2.20		
158	Macro WAITIDLE false-abort after a burst's trailing motion	Files: 2 0 +0 Lines: +130 -35
159	Stepper Calibration (Probe): parks at G30, Safe Z delta field, program view auto-hides on success	Files: 10 0 +0 Lines: +39 -12
160	Start Job: synthetic "G28 (loose probe)" fixture - no saved fixture required	Files: 2 0 +0 Lines: +83 -20
161	Cycle Start renamed to Run, with a proper run-mode dropdown	Files: 29 0 +0 Lines: +406 -184
Version 2.21		

162	Generate button folded into the shared Run bar (Start Job + 4 tools)	Files: 21 0 +0 Lines: +343 -47
163	Status bar: permanent large font + green/red flash instead of enlarge/shrink	Files: 3 0 +0 Lines: +81 -44
164	Stepper Calibration (Probe): Z axis via a 1-2-3 gauge block	Files: 14 0 +0 Lines: +640 -36
Version 2.22		
165	Check for Updates works on dev builds	Files: 2 0 +2 Lines: +241 -10
Version 2.23		
166	Apple-HIG visual redesign across all main tabs	Files: 32 0 +1 Lines: +352 -47
167	Machine Setup: optional steps (Fixtures, Simulator) always show green	Files: 1 0 +0 Lines: +16 -5
168	SD Card tab no longer shows "No card" while mount status is still resolving	Files: 1 0 +0 Lines: +7 -3
169	Silent update check in the title bar + live rebuild-status on Settings > Simulator	Files: 2 0 +0 Lines: +60 -0
170	Sidebar flyout panels no longer overlap the main-nav tab strip	Files: 3 0 +0 Lines: +76 -10
Version 2.24		
171	Offsets tab rework: inline-editable grid with change tracking, correct G28/G30/G92 semantics	Files: 3 0 +0 Lines: +433 -181
172	UI polish: oval checkboxes, unit-toggle peek, tab-drag/flyout fixes, stale status messages	Files: 19 0 +1 Lines: +601 -204
Version 2.25		
173	Generate button green cue restored; Z-gauge reuse WAITIDLE	Files: 3 0 +0 Lines: +27 -0
174	Tools-tab colon alignment; disambiguated .macro filenames	Files: 10 0 +0 Lines: +20 -16
Version 2.26		
175	ATC macro gate false-"Outdated" trip fixed	Files: 2 0 +0 Lines: +9 -2
176	Run dropdown: new Simulate mode	Files: 5 0 +0 Lines: +170 -0
177	Program-list explain fix; compact limits display	Files: 26 0 +0 Lines: +348 -105
Version 2.27		
178	ioSenderV2 Fusion Addin: Feeds & Speeds + Batch Post Process + installer	Files: 24 0 +8 Lines: +3275 -141

Version 2.28

179	Tab reorder + Settings splitters/Simulator redesign	Files: 8 0 +0 Lines: +92 -40
180	3D View curve trail visibility fix	Files: 1 0 +0 Lines: +13 -6
181	Firmware update UI redesign + real changelog	Files: 6 0 +0 Lines: +149 -94
182	Env-var removal: OBS/AI key/GH token to Settings	Files: 11 0 +3 Lines: +513 -87
183	OBS Validate button	Files: 2 0 +0 Lines: +135 -0
184	AI review cancel actually cancels	Files: 2 0 +0 Lines: +50 -30
185	Exit-blocked message + search crash + tooltip order fixes	Files: 3 0 +0 Lines: +32 -2
186	Manual: per-screenshot breakdowns + reshoot tooling	Files: 6 0 +2 Lines: +244 -12

Version 2.29

187	Firmware update-check: query real /releases/latest	Files: 1 0 +0 Lines: +9 -6
-----	--	-------------------------------

Version 2.30

188	Configurable probe search distance on all 4 Probing tabs	Files: 11 0 +0 Lines: +88 -0
189	Crash fixes: null keymap load, cross-thread UI crash; console visibility re stored at connect	Files: 6 0 +0 Lines: +67 -7

Version 2.31

190	Phil Barrett's UI feedback pass	Files: 20 0 +4 Lines: +600 -152
191	Fix: tab drag could crash or freeze the window	Files: 3 0 +0 Lines: +44 -4

Version 2.32

192	Odd Jobs tab — Setup + Work Order builder	Files: 48 0 +11 Lines: +6404 -125
-----	---	--------------------------------------

Version 2.33

193	Work Order tab, conductive-material rules, touch-plate TLO	Files: 32 2 +0 Lines: +251 -218
194	Work Order → Job tab handoff, load performance	Files: 17 0 +1 Lines: +440 -103

Version 2.34

195	Work Order chamfer bit, cut direction, spindle-direction setting	Files: 22 0 +1 Lines: +424 -173
Version 2.35		
196	Setup cold-start crash; Work Order live status in the Job tab	Files: 5 0 +0 Lines: +100 -44
Version 2.36		
197	Stepper & squareness → Machine Setup: Calibration	Files: 10 4 +0 Lines: +250 -1123
198	Spoilboard surfacing → Work Order Surface toolpath	Files: 5 0 +0 Lines: +309 -28
199	User-addable custom tools (no more tool enum)	Files: 8 0 +3 Lines: +927 -396
200	App.config first-run processing & per-section isolation	Files: 2 0 +0 Lines: +115 -6
201	Fix batch — Go To, park height, dry run, alarm aborts, jog pad	Files: 14 0 +0 Lines: +632 -107
202	Touch-plate offsets vs conductive stock; Work Order WCS	Files: 4 0 +0 Lines: +98 -32
Version 2.37		
203	Feed rate readout width + unit in tooltip	Files: 10 0 +0 Lines: +31 -5
204	Tools tab consolidation - relocated tools removed, hides when empty	Files: 14 2 +0 Lines: +67 -1096
205	Jog back-pressure shared with the gamepad, and its ack made visible	Files: 4 0 +1 Lines: +122 -42
206	Fixture dialog: probe choice persisted, Test uses the live position, no more minimize	Files: 4 0 +0 Lines: +163 -29
207	Setup step timing, shorter probe retreats, and two upload/sessions	Files: 7 0 +0 Lines: +174 -73
Version 2.38		
208	Settings & Machine Setup: searchable navigation tree replaces tab strips	Files: 45 0 +6 Lines: +1788 -309
Version 2.39		
209	Settings search names the matched control	Files: 3 0 +0 Lines: +125 -16
210	Main bar cut back; the rest opens from the File/Tools menus	Files: 12 0 +2 Lines: +590 -118
211	Interface preferences gather under User Interface → General	Files: 10 0 +2 Lines: +171 -24
212	Shortcuts follow a view; menu commands bindable; placement editor	Files: 15 0 +0 Lines: +621 -266

213	Jog pad optional; Job panels fill one column and clear the flyouts	Files: 15 0 +0 Lines: +323 -121
214	Fix batch: duplicate tabs, unsatisfiable setup prompt, Esc, scroll wheel	Files: 13 0 +0 Lines: +357 -58
215	Menu-hosted views open, and stop crashing, when you click them	Files: 7 0 +0 Lines: +948 -65
Totals (215 changes)		Files: 1908 29 +214 Lines: +79058 -16418

Cross-repo: which ioSender features the stevenrwood/Simulator fork exercises.

No build dependency, and all-or-nothing — you run the whole `Simulator@integration` build against `ioSender` (not a chosen subset), so this table is informational rather than something to satisfy. The coupling is runtime / protocol: the simulator only exercises a feature when the `ioSender` change below drives it over the socket.

ioSender feature	Simulator feature it lights up	Coupling
#6 Load Folder	3D carve view	<code>PushHeaderToSimulator()</code> sends the program's leading <code>(STOCK ...)</code> / <code>(TOOL ...)</code> comments so the carve knows stock size + cutter geometry.
#11 macro pre-processor	littlefs macros	<code>O<name> CALL</code> forwarding resolves macros stored on the simulator's <code>/littlefs</code> .
#14 SD / filesystem browser	littlefs, YModem	File browser + YModem uploader that puts files onto the simulator filesystem.
#15 connect-to-simulator	3D carve view, settings persistence, sim core	Connects to the standalone sim; <i>always-send-comments</i> forces <code>(TOOL)/(STOCK)</code> through for the carve; "My Machine" EEPROM uses the sim's settings persistence.
#25 ATC macro provisioning	YModem, littlefs, probe surfaces	"Install ATC macros" uploads via YModem to <code>/littlefs</code> ; the Start-Job / <code>probe_tfl</code> cycle drives the modelled probe surfaces.

For the full virtual-CNC experience, run `ioSender@integration` against `Simulator@integration` — one all-in-one bundle each (the firmware-submodule fixes ride along inside the sim). The matched-simulator feature ([#38](#)) builds an option-matched sim automatically.

#1 Bug Fixes for released ioSender

File	+	-
.gitattributes	3	2
CNC Controls/CNC Controls/JobControl.xaml.cs	7	0
CNC Controls/CNC Controls/Widget.cs	3	1
CNC Core/CNC Core/CNC Core.csproj	6	0
CNC Core/CNC Core/Grbl.cs	9	7

A bucket of fixes for bugs that exist in released ioSender, independent of the feature PRs. Each is small and self-contained:

- **RP.Math build fix.** CNC Core compiles `GCodeEmulator.cs`, which uses the `RP.Math.Vector3` type, but the project file declared no reference to `RP.Math`, so a clean build fails to resolve the type. Adds the `RP.Math` and `RP.Math.Vector3` references using the *same* `HintPath` convention already used by `CNC Controls.csproj` (`..\..\Vector-master\RP.Math.Vector3\bin\Release\`). Purely additive.
- **LF line-ending guard.** Adds `.gitattributes (* text=auto eol=lf)` so line endings are normalized.
- **CSV null-reference fix.** Avoids a `NullReferenceException` when an alarm/error/settings-group CSV resource is missing.
- **Boolean settings convention.** The settings editor checkbox initialised with `value == "1"`, but a boolean is true when `value != "0"` everywhere else (the list, controller-value parsing). Booleans reported as a truthy value other than the literal "1" showed enabled in the list yet left the checkbox unchecked. Canonicalises boolean values to "1"/"0" in `GrblSettingDetails.Value` and reads the checkbox with the `!= "0"` convention.
- **Null-comms streaming guard.** `JobControl.ResponseReceived` is raised by a specific comms instance but writes to the static `Comms.com`; during a reconnect/teardown (startup handshake or relaunch) that static can be null while an in-flight response from the old link still arrives, NREing in the `SendMDI/Reset` cases. Bails out early when `Comms.com` is null.

#2 Surface Motor Fault and Motor Warning signals in Signals display

File	+	-
CNC Controls/CNC Controls/SignalsControl.xaml	2	30

Removes the capability-gating Styles that prevented the Motor Fault (**F**) and Motor Warning (**W**) indicators from ever showing.

grblHAL does not advertise these as NEWOPT capability tokens, so the visibility gates were effectively dead code — the LEDs were permanently hidden. Motor Fault / Warning are now always displayed alongside the other signal LEDs (H / S / P), turning red when the corresponding signal triggers. This surfaces the Motor Fault signal as intended, without requiring the firmware to advertise a capability flag.

#3 Persist console state and add an in-app Key Mappings editor

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	14	0
CNC Controls/CNC Controls/AppConfigView.xaml	1	1
CNC Controls/CNC Controls/AppConfigView.xaml.cs	16	3
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
CNC Controls/CNC Controls/ConsoleControl.xaml	3	3
CNC Controls/CNC Controls/ConsoleControl.xaml.cs	14	0
CNC Controls/CNC Controls/ConsoleWindow.xaml.cs	47	0
CNC Controls/CNC Controls/KeyMapEditor.xaml	115	0
CNC Controls/CNC Controls/KeyMapEditor.xaml.cs	606	0
CNC Core/CNC Core/CNC Core.csproj	7	0
CNC Core/CNC Core/KeyPressHandler.cs	111	0
CNC Core/CNC Core/ShortcutKey.cs	136	0
ioSender XL/ioSender XL/App.config	6	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	69	3
ioSender/ioSender/MainWindow.xaml.cs	69	3

Persists the console's state across sessions and replaces the old App Settings "Save key mappings" button (which only dumped the current bindings to `KeyMap<mode>.xml` for hand-editing) with a proper in-app **Edit Key Mappings** dialog. Applies to both **ioSender** and **ioSender XL**.

Console persistence: the three console checkboxes (*Verbose*, *Filter out realtime responses*, *Show all realtime responses*), whether the floating console window is open, and that window's size/position (clamped to the visible desktop so it can never restore off-screen) are all remembered. A new `ConsoleShortcut` setting (default Esc) toggles the console; it is now a first-class action inside the mappings editor rather than a separate, ad-hoc tab. A shared `ShortcutKey` helper (parse / storage / display) is used by both main windows, and an `AppConfig.ConsoleShortcutChanged` event re-registers the key live without a restart.

Key Mappings editor (`KeyMapEditor`, modal so jog/realtime dispatch can't fire mid-capture):

- One grouped, collapsible outline of every bindable action (grouped by function, like the Load Folder outline; groups remember their expansion per session). Click a row, press a combo to assign; right-click for *Reset to default* / *Clear*.
- Bindings changed from the factory default are highlighted; group headers flag a modified group and offer *Expand all* / *Collapse all* / *Reset group*.
- Per-axis jog keys are folded into the same list; rows and group headers carry tooltips.
- A *No-numpad keys* preset remaps the NumPad jog/step/feed actions to `Ctrl+1-8` and `[ ] - =` for keyboards without a numeric keypad (Windows exposes no reliable API to detect numpad presence, so this is a user-triggered preset).

The `KeyPressHandler` gains an editor API (`GetActionBindings/GetJogBindings/Apply...`) over its existing function catalog, identifying bindings by reflection method name with a friendly-label map. Persistence still uses the existing `SaveMappings/LoadMappings`.

#4 Fix unhandled exceptions on connection loss (e.g. SD card swap)

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	5	0
CNC Controls/CNC Controls/SDCardView.xaml.cs	13	0
CNC Core/CNC Core/Comms.cs	74	0
CNC Core/CNC Core/EltimaStream.cs	6	0
CNC Core/CNC Core/Grbl.cs	13	4
CNC Core/CNC Core/GrblViewModel.cs	45	0
CNC Core/CNC Core/SerialStream.cs	179	42
CNC Core/CNC Core/TelnetStream.cs	105	7
CNC Core/CNC Core/WebsocketStream.cs	79	8

When the controller's serial/USB device disappears — for example a board that resets and re-enumerates when its SD card is removed or reinserted — the status-poll timer kept writing to the dead port. The write threw (an `IOException`, then an `InvalidOperationException`: "BaseStream only available when the port is open") on a `System.Timers.Timer` thread, and the unhandled exception terminated the whole process. Opening the SD card tab afterwards threw similarly from `PurgeQueue`.

Changes:

- Guard all stream writes (`IsOpen` + try/catch). A device-gone fault now closes the port and starts an auto-reconnect instead of crashing.
- Add a shared, transport-agnostic `Reconnector` (used by serial, network and websocket) exposing `ConnectionLost` / `Reconnected` events. `GrblViewModel` handles them (stop/resume polling, show status); it is wired up at connect time in `AppConfig`.
- **Serial:** refactor open into a reusable `OpenPort()` that probes `GetPortNames()` and re-opens; publish the port only once it is actually open, to avoid a non-null-but-closed race; make `PurgeQueue` tolerant of a closed port; harden the receive handler against a port torn down mid-read.
- **Telnet / websocket:** guarded writes, loss detection (read returning 0 / `OnClose`) and reconnect via the same helper.
- Wrap the poll-timer callback in try/catch as a last line of defence.
- Guard the SD card view against acting on a closed connection.

#5 Add Stepper calibration (scratch) tab to grbl:Settings

File	+	-
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
CNC Controls/CNC Controls/GrblConfigView.xaml	3	0
CNC Controls/CNC Controls/IGrblConfigTab.cs	1	0
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml	92	0
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml.cs	486	0
.gitattributes	3	2
CNC Controls/CNC Controls/LibStrings.xaml	1	0
CNC Core/CNC Core/CNC Core.csproj	6	0
ioSender XL/ioSender XL/App.config	6	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	168	0

Adds a new tab to grbl:Settings for V-bit *scratch-line* steps/mm calibration over a long span — a more accurate alternative to the short jog-based calibration for the X and Y axes.

It generates an .nc program that scratches paired lines (perpendicular to the calibrated axis) for several candidate steps/mm values. Because GRBL cannot change \$100/\$101 mid-program, each candidate is simulated using the *commanded-distance trick*: the commanded distance $C = \text{span} \times \text{candidate} / \text{current}$, so the machine physically travels the distance that the candidate steps/mm value *would* produce.

The program is loaded into the job view (with an optional save to disk). After cutting, the user measures the actual spacings; the tab then computes and saves the corrected \$100/\$101 from those measurements (an implied value per pair, averaged). The prolog mirrors the Load Folder convention. X/Y only — Z continues to use the existing jog wizard.

Includes a small follow-up commit with high-DPI layout tweaks for the new tab.

#6 Add "Load Folder": load a folder of per-toolpath .nc files as one outlined program

File	+	-
.gitattributes	3	2
CNC Controls/CNC Controls/CNC Controls.csproj	2	0
CNC Controls/CNC Controls/FolderPicker.cs	159	0
CNC Controls/CNC Controls/FusionFolderLoader.cs	353	0
CNC Controls/CNC Controls/GCode.cs	156	0
CNC Controls/CNC Controls/GCodeListControl.xaml	45	0
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	129	0
CNC Controls/CNC Controls/JobControl.xaml.cs	4	0
CNC Core/CNC Core/GCodeJob.cs	41	5
CNC Core/CNC Core/GrblViewModel.cs	7	1
Fusion Addin/README.md	116	0
Fusion Addin/install-macos.sh	39	0
Fusion Addin/install-windows.ps1	40	0
Fusion Addin/ioSenderBatchPost/ioSenderBatchPost.manifest	11	0
Fusion Addin/ioSenderBatchPost/ioSenderBatchPost.py	476	0
ioSender XL/ioSender XL/MainWindow.xaml	1	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	5	0
ioSender/ioSender/MainWindow.xaml	1	0
ioSender/ioSender/MainWindow.xaml.cs	5	0
CNC Controls/CNC Controls/LibStrings.xaml	1	0
CNC Core/CNC Core/CNC Core.csproj	6	0
ioSender XL/ioSender XL/App.config	6	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	21	0
Locale/*/csv/ioSender.resources.*.csv (7 locales)	7	0

File > Load Folder reads a folder of per-operation files named <seq>_<name>_T<tool>.nc (as produced by the companion Fusion 360 add-in) and assembles them in memory into a single program:

- strips each file's header and program-end footer;
- inserts a G53 G0 Z0 safe-Z retract + M6 T<n> tool change before each toolpath, but only when the file does not already contain an M6 (so any post works);
- optionally restores rapid moves that Fusion Personal Use downgraded to G1;
- shows the result as a collapsible per-toolpath outline (groups default collapsed, and stay expanded while scrolling);
- adds *Start from this toolpath* and *Run just this toolpath* (the latter bounded to that section), each preceded by the G90 G94 / G17 / G21 prolog.

The new `FusionFolderLoader` is a faithful C# port of the add-in's combine / strip / rapid-restore rules; `FolderPicker` uses the modern `IFileOpenDialog` (`FOS_PICKFOLDERS`) for folder selection.

GCodeBlock gains a `Section` tag for outline grouping and an optional `AddLineNumbers` gate; GrblViewModel gains `IsFolderView` and a one-shot `RunToBlock` end-bound consumed by `CycleStart`.

Companion Fusion 360 add-in (ioSenderBatchPost): a standalone add-in (no external framework) that posts every operation in every setup to its own `<seq>_<name>_T<tool>.nc` file in a chosen folder — the input for Load Folder. Combining, tool-change insertion and rapid restoration are intentionally left to ioSender, so the add-in only posts. A post-processor dropdown (default `grbl.cps`) selects which post Fusion runs per operation. Ships with `install-windows.ps1` / `install-macos.sh` and a README. Fusion auto-discovers it once copied, but it must be enabled once via *Scripts and Add-Ins*.

Tool table for the simulator: the add-in also writes a `0_ToolTable.nc` carrying `(STOCK X= Y= Z=)` and `(TOOL T= D= TYPE= [A=])` comment lines — the stock box size and each tool's diameter and shape (FLAT/BALL/VBIT, with the V-bit included angle) — read from the setup's stock parameters and tool definitions. Load Folder detects this file (name matches `tool table`), loads it first with comments preserved, and pushes the leading `(STOCK ...)/(TOOL ...)` lines to a connected grblHAL simulator, which uses them for its 3D material-removal carve (real controllers ignore the comments). A dialog checkbox toggles it; the output matches the SRWCommands PostProcess add-in byte-for-byte. See `TOOL_TABLE_FORMAT.md` in the simulator repo.

Note: the `Fusion Addin/` folder is an optional companion tool; the maintainer may prefer to host it separately. It can be dropped from the PR if so.

#7 Improve high-DPI / large-text-size layout across the UI

File	+	-
CNC Controls Camera/ ... /ConfigControl.xaml	3	3
CNC Controls Lathe/ ... /ConfigControl.xaml	6	6
CNC Controls Probing/ ... /ProbingView.xaml	6	6
CNC Controls Probing/ ... /ProbingView.xaml.cs	3	1
CNC Controls/ ... /BasicConfigControl.xaml	4	4
CNC Controls/ ... /CoordValueSetControl.xaml	6	6
CNC Controls/ ... /FeedControl.xaml	5	5
CNC Controls/ ... /GotoBaseControl.xaml	5	5
CNC Controls/ ... /GotoControl.xaml	1	1
CNC Controls/ ... /JogBaseControl.xaml	2	2
CNC Controls/ ... /LEDControl.xaml	4	5
CNC Controls/ ... /NumericField.xaml	6	3
CNC Controls/ ... /NumericField.xaml.cs	3	1
CNC Controls/ ... /OutlineBaseControl.xaml	8	4
CNC Controls/ ... /OutlineControl.xaml	1	1
CNC Controls/ ... /OutlineFlyout.xaml	1	1
CNC Controls/ ... /OverrideControl.xaml	3	3
CNC Controls/ ... /SpindleControl.xaml	8	8
CNC Controls/ ... /StatusControl.xaml	3	3
CNC Controls/ ... /StepperCalibrationWizard.xaml	2	2
CNC Controls/ ... /StripGCodeConfigControl.xaml	15	9
CNC Controls/ ... /ToolView.xaml	2	2
CNC Controls/ ... /TrinamicView.xaml	1	1
CNC Controls/ ... /WorkParametersControl.xaml	18	18
ioSender XL/ioSender XL/JobView.xaml	6	6
ioSender/ioSender/JobView.xaml	1	1

Makes the UI usable at 125–150% Windows text scaling by replacing fixed control heights/widths with auto-sizing plus `MinWidth/MinHeight`, so labels and fields grow with the font instead of clipping or overlapping. Changes are layout-only — no behavioural changes.

- **Shared controls:** the `NumericField` label column now auto-sizes (`MinWidth = ColonAt`) with a `SharedSizeGroup` so labels align in any container that sets `Grid.IsSharedSizeScope`. `CoordValueSetControl`, `StatusControl`, `LEDControl` (dropped a hard `MaxHeight`) and `OverrideControl` no longer pin `Height/Width`; the **Spindle** group switches its fixed `Width=250` to `MinWidth` so the RPM field is no longer clipped at larger text sizes.
- **grbl:Settings config controls** (Basic / StripGCode / Lathe / Camera) and both Stepper calibration tabs auto-size their rows and the Axis dropdown; the Probing view auto-sizes its left panel with shared-size label alignment.
- **Main window** (JobView XL + ioSender): right-panel grid / columns / panels auto-size instead of fixed 515 / 250 px, and each panel control (WorkParameters, Spindle, Coolant, Outline, Feed, Goto)

auto-sizes.

#8 Native Xbox controller support (+ Key Mappings editor polish)

File	+	-
CNC Core/CNC Core/XInput.cs	160	0
CNC Core/CNC Core/ControllerService.cs	186	0
CNC Core/CNC Core/ControllerMapper.cs	408	0
CNC Core/CNC Core/CNC Core.csproj	9	0
CNC Core/CNC Core/GrblViewModel.cs	16	0
CNC Core/CNC Core/KeyPressHandler.cs	23	0
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	5	0
CNC Controls/CNC Controls/KeyMapEditor.xaml	222	79
CNC Controls/CNC Controls/KeyMapEditor.xaml.cs	958	606
.gitattributes	3	2
ioSender XL/ioSender XL/App.config	6	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	259	0

Adds first-class game-controller support with **zero new dependencies** — the project uses no NuGet, so the controller is read via native **XInput** P/Invoke (xinput1_4.dll, falling back to xinput9_1_0.dll). A ~60 Hz DispatcherTimer poll layer runs in parallel to the keyboard handler.

- **Interop / service:** XInput.cs wraps the gamepad state and vibration structs; ControllerService.cs scans all four slots, edge-detects button down/up, and exposes Connected/Disconnected events, deadzone/normalize helpers and rumble.
- **Button map:** ControllerMapper.cs dispatches a default, fully re-mappable button map to machine actions (A = Cycle Start, B = Feed Hold, X = Spindle Stop, Y = Home, Back = Reset, Start = Unlock, D-pad = step-jog X/Y). Actions route through the same GrblViewModel.ExecuteCommand path as the on-screen buttons and are gated to a live connection in Idle/Jog/Tool states (with a status message when ignored). A short rumble confirms connection.
- **Analog jog:** the left stick proportionally jogs X/Y and the triggers jog Z, via throttled overlapping \$J= moves (jog-cancel on release) so motion stays smooth; speed scales with stick deflection. Enable, left-stick deadzone, max-feed multiple of the Jog panel feed, and per-axis invert are user-configurable. The button map and analog settings persist to ControllerMap.xml.
- **Controller tab** in the Key Mappings editor: live press indicator, per-button action dropdowns (each button's default marked with a leading *), *Restore Defaults* (enabled only when modified), machine-direction-aware tooltips, and the analog-jog settings — machine dispatch is paused while the dialog is open. New JogDistanceProvider/JogFeedProvider hooks let controller jog match the on-screen Jog panel's current step and feed.

The same branch also carries the keyboard-tab polish (changed-binding highlight with per-row/group reset, *Clear* moved into the row menu, column sizing, and the grouped outline now keeps a section expanded while scrolling instead of collapsing it). The branch is fully LF-normalized, so the counts above are the real diff — no line-ending noise.

#9 Configurable main page + flyouts + jog panels (ioSender XL)

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	141	20
CNC Controls/CNC Controls/AppConfigView.xaml	3	1
CNC Controls/CNC Controls/AppConfigView.xaml.cs	168	0
CNC Controls/CNC Controls/BasicConfigControl.xaml	2	0
CNC Controls/CNC Controls/CNC Controls.csproj	65	0
CNC Controls/CNC Controls/Converters.cs	17	0
CNC Controls/CNC Controls/JogBaseControl.xaml	2	2
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	157	2
CNC Controls/CNC Controls/JogConfigControl.xaml	7	7
CNC Controls/CNC Controls/JogSlider.xaml	66	0
CNC Controls/CNC Controls/JogSlider.xaml.cs	51	0
CNC Controls/CNC Controls/JogUiConfigControl.xaml	18	9
CNC Controls/CNC Controls/KbdJogGridControl.xaml	46	0
CNC Controls/CNC Controls/KbdJogGridControl.xaml.cs	64	0
CNC Controls/CNC Controls/KeyboardJoggingControl.xaml	25	0
CNC Controls/CNC Controls/KeyboardJoggingControl.xaml.cs	34	0
CNC Controls/CNC Controls/LimitsControl.xaml	6	24
CNC Controls/CNC Controls/LimitsControl.xaml.cs	77	0
CNC Controls/CNC Controls/MachinePositionControl.xaml	69	0
CNC Controls/CNC Controls/MachinePositionControl.xaml.cs	21	0
CNC Controls/CNC Controls/MainPageEditor.xaml	108	0
CNC Controls/CNC Controls/MainPageEditor.xaml.cs	288	0
CNC Controls/CNC Controls/MainPanelRegistry.cs	111	0
CNC Controls/CNC Controls/NumericField.xaml	12	2
CNC Controls/CNC Controls/NumericField.xaml.cs	38	0
CNC Controls/CNC Controls/OffsetFlyout.xaml	41	0
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	133	0
CNC Controls/CNC Controls/PanelFlyout.xaml	43	0
CNC Controls/CNC Controls/PanelFlyout.xaml.cs	80	0
CNC Controls/CNC Controls/Properties/Settings.Designer.cs	36	0
CNC Controls/CNC Controls/Properties/Settings.settings	9	0
CNC Controls/CNC Controls/SidebarItem.cs	23	4
CNC Controls/CNC Controls/TabRegistry.cs	42	0
CNC Controls/CNC Controls/ToggleControl.xaml	20	2
CNC Controls/CNC Controls/UIJogGridControl.xaml	65	0
CNC Controls/CNC Controls/UIJogGridControl.xaml.cs	80	0
CNC Controls/CNC Controls/UIJoggingControl.xaml	44	0
CNC Controls/CNC Controls/UIJoggingControl.xaml.cs	29	0

CNC Core/CNC Core/KeyPressHandler.cs	22	4
CNC Core/CNC Core/SerialStream.cs	1	1
ioSender XL/ioSender XL/JobView.xaml	23	14
ioSender XL/ioSender XL/JobView.xaml.cs	100	19
ioSender XL/ioSender XL/MainWindow.xaml	3	3
ioSender XL/ioSender XL/MainWindow.xaml.cs	123	5
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	322	0

ioSender XL only. Makes the crowded right-hand panel area configurable instead of fixed. A new **Edit Main Page** dialog (beside *Edit Key Bindings*) is a shuttle editor with three buckets — *Available*, *Main page* (up to six slots), and *Flyouts* — so each named panel can be placed on the main page or as a pinnable right-edge flyout, or left off entirely to reclaim space. Nothing is auto-assigned.

- **Flyouts** share a flush, tab-height border and distribute their content vertically; each has a pin (stays open when another flyout opens, and persists across launches) and a close button.
- **Per-offset flyouts** (G28 / G30 / G54..G59.3 / G92) are tiny *Go* buttons (tooltip shows the live coordinates; G28/G30 also get a *Set* = G28.1/G30.1) so several can be pinned beside the jog panel.
- **Jog panels** — UI jogging (distance + speed) and keyboard default-speed — become assignable panels rendered as compact sliders with a read-only value; Settings:App stays the editor. The jog-arrow radios are hidden only when the UI jog panel is assigned.
- **Settings:App** gains opt-in autosave (with a discard prompt) and a *Reset to default* context-menu entry on numeric fields; the old *Edit Key Mappings* button is renamed **Edit Key Bindings**.

Layout choices persist (panels / flyouts / pins serialized as CSV to sidestep the `XmlSerializer` list-append quirk). Also includes robustness fixes: a resilient `SerialStream.OutCount` that no longer throws on a dropped port, and a deferred main-panel build so startup can't race the config load.

Extended: a fourth bucket places panels *left* of the 3D view (DRO, Program limits, Machine Position now in the registry) in a scroll region that never overlaps the fixed Signals/Status block. Per-offset *Set* now also handles G54–G59.3 (captures the current machine position as that coordinate system's origin via G10 L2 P<n>). The UI jog panel renders as a 2×4 distance/speed grid with green-click selection, a *Continuous* toggle and a *Remember distance & speed across restarts* option; *Link distance and speed to UI jogging* makes keyboard jogging follow the UI distance *and* speed (hiding the Keyboard Jogging panel). Coolant toggles render as a self-contained red/green pill (no theme dependency). A new **Tabs** tab in the editor reorders / hides the main TabControl tabs (Settings:App protected), applied on startup via `TabRegistry / Config.Tabs`. The *Restart* button moved to Settings:App (next to *Edit Main Page*), enabled only after a layout/tab change.

Panel refinements: the Machine Position panel shows MPos as a live `work + WorkPositionOffset` sum (tracking the DRO notifications); the limits panel stays visible and shows the machine soft-limit envelope from \$13x/\$23 when no program is loaded (program bounding box when one is), retitling itself *Machine limits / Program limits* accordingly; the 2×4 jog grid keeps its green selection highlight using the retained discrete index (survives keyboard/continuous-mode flips); and the **Tabs** editor now also lists tabs that host an `IGrbLConfigTab` (no `ViewType`) by falling back to the `TabItem` name.

#10 Macro manager + run-only flyout

File	+	-
CNC Controls/CNC Controls/MacroManagerDialog.xaml.cs	316	0
CNC Controls/CNC Controls/MacroManagerDialog.xaml	81	0
CNC Controls/CNC Controls/MacroExecuteControl.xaml.cs	19	8
CNC Controls/CNC Controls/AppConfig.cs	19	0
CNC Controls/CNC Controls/AppConfigView.xaml.cs	10	0
CNC Controls/CNC Controls/MacroExecuteControl.xaml	8	16
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
CNC Core/CNC Core/GCode.cs	5	0
CNC Controls/CNC Controls/JobControl.xaml.cs	3	2
CNC Controls/CNC Controls/MacroToolBarControl.xaml.cs	3	0
CNC Controls/CNC Controls/AppConfigView.xaml	1	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	126	0

Adds an **Edit Macros** button to the Settings:App page opening a macro manager — a DataGrid with one row per macro, in the spirit of Fusion's *Scripts and Add-Ins* dialog — and reworks the on-screen macro flyout for running.

- **Name** and a **Prompt** (confirm-before-run) flag are edited in-line; an assignable **Key** column (F1–F12) sets the function key (keys are unique; *Create* auto-assigns the first free one); a **File** column shows the referenced file for @<path> macros (full path on hover), blank for inline.
- **Edit** edits the macro's definition (inline G-code, or the @<path> reference line) and reads it back; **View** opens what it points to — the referenced file for an @<path> macro (created if missing, to author a new one), otherwise the code. **Create/Delete** add and remove rows.
- The **macro flyout** is now run-only: a macro-name dropdown plus a **Run** button (the Edit button is gone — editing lives in the manager). It pre-selects the most recently run macro, persisted in `Config.LastMacroId` and updated from every run path (flyout, toolbar, F-keys), falling back to the first.

The macro's function key is decoupled from its Id via a new `Macro.FKey` field (legacy configs migrated on load: Id n keeps Fn). The @<path> *run-time* resolution — loading and running the referenced file, with directive processing — is provided by **#11**; this PR adds the manager/flyout support for authoring, viewing, and repointing references.

#11 Macro Processor Enhancements

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	582	0
CNC Controls/CNC Controls/MacroToolBarControl.xaml.cs	1	1
CNC Controls/CNC Controls/MacroExecuteControl.xaml.cs	1	1
CNC Controls/CNC Controls/JobControl.xaml.cs	1	2
CNC Controls/CNC Controls/CNC Controls.csproj	1	0
CNC Core/CNC Core/GCodeParser.cs	31	12
CNC Core/CNC Core/NGCExpr.cs	22	0
CNC Core/CNC Core/Grbl.cs	11	0
CNC Core/CNC Core/GrblViewModel.cs	9	2

A sender-side **macro pre-processor** (`MacroProcessor.Run`) that interprets parenthesised directives before the remaining lines are streamed to the controller. All macro entry points — the top toolbar, the on-screen macro flyout, and the F-key handler — now route through it (previously the toolbar called `ExecuteMacro` directly and silently ignored every directive).

Directives, each a no-op the controller would treat as a comment, interpreted by the sender instead:

- **(PREREQ, cond, ...)** — require machine state *before* anything streams; if unmet the macro aborts with a message and nothing is sent. Conditions: `homed`, `idle`, `tlo`, `noalarm`, `connected`; stored positions / work offsets `g28`, `g30`, `g92`, `g54`–`g59.3` ("set" if any axis offset is non-zero, read fresh from `$#`); and any other token is required to be a controller `$I` build option (NEWOPT, e.g. `EXPR`), matched exactly and case-sensitively. `homed` reads `grblHAL's live sys.homed.mask` from `$#` rather than the change-based status `H: cache`, which can stay stale after a position-loss alarm.
- **(MBOX, [buttons,] message)** — modal hold; `OK/OKCANCEL/YESNO`, `Cancel/No` aborts the rest.
- **(WAITIDLE)** — hold streaming until the controller finishes what was sent and returns to `Idle` — needed after a controller-side job such as `$F=<file>`, which acks immediately and drops sender input while it runs.
- **(PROMPT param, default [, label])** — collect input values in a single up-front dialog and bind them two ways: assign the globals on the controller (so `$F=` files can read them) and substitute the references in the streamed body.
- **@<path>** — a macro whose body is a single `@<path>` line is a reference to an external file: that file's current contents are loaded and run in its place, re-read on every run — so a macro can be developed by editing the file directly. The loaded contents go through the same directive pipeline. (#10 adds the manager/flyout support for authoring and repointing these references.)

Supporting core changes so macros stream cleanly to an NGC-capable controller, all in the spirit of "don't reject what the controller can evaluate": `ExecuteMacro` now inherits the controller's expression support (as file streaming already did) and forwards verbatim any line its own parser cannot handle; `GCodeParser` recognises **named O-word subroutine calls** (`0<name> CALL [...]`) and forwards them to the controller, which resolves the named sub from its filesystem; and the `$# [HOME:...:mask]` `homed`-axes mask is parsed for the authoritative `homed` check.

#12 Onboarding tooltips

File	+	-
CNC Controls/CNC Controls/Converters.cs	50	0
CNC Controls/CNC Controls/StatusControl.xaml	3	0
CNC Controls/CNC Controls/StripGCodeConfigControl.xaml	10	5
CNC Controls/CNC Controls/JogUiConfigControl.xaml	10	9
CNC Controls/CNC Controls/JogConfigControl.xaml	7	7
CNC Controls/CNC Controls/BasicConfigControl.xaml	3	3
CNC Controls/CNC Controls/FileActionControl.xaml	4	4
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	196	0

Tooltips aimed at users new to CNC, where ioSender's UI is otherwise terse.

- **State field** — a context-aware tooltip explains the current controller state in plain language (Idle, Run, Hold, Check, Tool, Door, ...). For an **alarm** it appends the controller's specific message — e.g. ALARM 4: Probe fail ..., pulled from the GrblAlarms enumeration loaded at connect — plus how to recover, so a bare ALARM:4 is self-explanatory instead of a code to look up. (A new GrblStateToTooltipConverter drives a ToolTip binding on the State box.)
- **Settings:App** — a “what it does and why it’s useful” tooltip on each application setting (the grbl settings page already self-documents in its right-hand pane, so it’s left alone). Keyboard jogging (fast/slow/step feed & distance, link-step-to-UI), UI jogging (the four distance and four speed presets, noting distance and speed are selected *independently*), and GCode command stripping (M6/M7/M8/G61-G64, for machines lacking the matching hardware). Also fixes the “Keep MDI focus” tooltip (it had been copy-pasted from the buffering option) and the circular “Send comments” one.

#13 Build documentation: Mega-XL upgrade notes + repeatable tool-change guide

File	+	-
docs/Mega-XL-Upgrades.html	840	0
docs/Mega-XL-Upgrades.pdf	bin	0
docs/Repeatable-Tool-Change.html	419	0
docs/Repeatable-Tool-Change.pdf	bin	0

Two self-contained HTML documents (each rendered to a companion PDF), added under a new docs/ folder. Purely additive; touches no source.

- **Repeatable-Tool-Change** — a turnkey, novice-friendly tool-change guide built around a **G59.3 fixed toolsetter** and a T<n>/M6 flow, with a top-down machine travel diagram (color-coded paths). Aimed at the goal of repeatable, hands-off tool changes for users new to CNC.
- **Mega-XL-Upgrades** — build notes for an upgraded Kickstarter v1.0 Mega V XL: frame/spindle/motion/probing/power sections, a back-of-enclosure two-panel harness model (hand-built SVG diagrams), a cable & wiring schedule, and an **interactive bill-of-materials worksheet** — an in-page editor (double-click to edit Qty / Unit / Description / Source, live extended & category subtotals & grand total, URL shortening, Save-to-download) plus a linked table of contents.

The Mega-XL notes are specific to one machine and may be of limited upstream interest — they can be hosted separately or dropped from the PR. The repeatable tool-change guide is more generally applicable. The associated controller macros (`tc.macro`, `probe_tfl.macro`) and the ATC provisioning UI are intentionally *not* in this PR — they remain with the macro work, pending firmware support.

#14 SD + LittleFS file browser & file manager on the SD Card tab

File	+	-
CNC Controls/CNC Controls/SDCardView.xaml.cs	505	111
CNC Controls/CNC Controls/GrblFilesystems.cs	142	0
tests/GrblFilesystemsTests.cs	83	0
CNC Core/CNC Core/TelnetStream.cs	54	14
tests/README.md	22	0
CNC Controls/CNC Controls/SDCardView.xaml	19	6
CNC Core/CNC Core/YModem.cs	14	4
CNC Controls/CNC Controls/CNC Controls.csproj	1	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	105	0

The SD Card tab listed only one filesystem (the SD card, or whatever was the current filesystem). On grblHAL builds that have both an SD card and a LittleFS store, the other filesystem — and any macros on it — were invisible.

This enumerates every mounted filesystem via `$FI ([FS:<name>@<path> size, free])` and lists them together in one grid with a new **Location** column, plus a per-filesystem **free-space banner** above the list. The right-click menu is reworked from *Run / Download and run / Delete* into a small **file manager**, and file operations target the file's own filesystem — a bare name on the root volume (unchanged single-SD behaviour) or an absolute path on a sub-mount such as `/littlefs`.

- **File manager menu:** *View / Edit / Create* (new content, or from a local file) open the file in Notepad — Edit and Create write the result back to the controller when Notepad closes; *Load* and *Load and run* bring the program into ioSender; *Copy to / Move to* transfer a file to another mounted filesystem (submenus built live from the mounts); *Delete*. Actions are enabled only for a real selected file.
- **Empty filesystems are visible:** a mount with no files gets a placeholder row so it can still be selected as an upload / copy target; the listing's re-entrant `Load()` is guarded (it pumps the dispatcher while waiting on the controller, so an overlapping refresh could corrupt the shared table).
- **Correct attribution under nested mounts:** a root `$F` recurses into sub-mounts, so an SD-root listing also returned the `/littlefs/*` files; each result is now attributed to its deepest containing mount, so files are not duplicated under (and mis-pathed on) the parent filesystem.
- **Upload to any filesystem:** `UploadLocalFile` targets a chosen filesystem via `$CWD` (the FTP path is built from the explicit destination, not the possibly-stale `FsCwd`), and upload is allowed on a LittleFS-only controller (no SD card present, so no SD mount status to require).
- **Upload reliability:** `TelnetStream` now writes *synchronously* — overlapped `WriteAsync` calls silently dropped a YModem block's payload/CRC — and `PurgeQueue` clears the async-read buffer instead of racing a second synchronous read on the same stream (which lost per-block ACKs, producing 0-byte files and multi-minute uploads); plus a bounded connect timeout so a reconnect retries quickly. YModem per-block ACK timeouts are raised (10 s open / 5 s block) to ride out flash-filesystem GC stalls, and blocks are sent in **128-byte (SOH)** packets rather than 1024-byte (STX): grblHAL's YModem receive ring is 1024 bytes (usable 1023), so a full 1029-byte STX packet can't fit — over telnet it arrives in a TCP burst faster than the firmware drains it and overflows,

stalling the transfer (a one-block file uploaded, larger ones hung). 128-byte blocks fit with margin on any transport.

- **Backward compatible:** builds that don't implement `$FI` (or report nothing mounted, `error:65`) return no `[FS:...]` lines, and the view falls back to the original single-filesystem mount + `$F` listing untouched. An SD card with files in its root works exactly as before, now also showing free space.
- **New `GrblFilesystems.cs`** holds pure, dependency-free helpers (mount-line parser, human-readable size, path qualification, free-space summary) and the `FsMount` model; the live `$FI/$F` querying lives in `GrblSDCard`.
- **Unit tested:** `tests/GrblFilesystemsTests.cs` exercises the pure helpers (29 assertions, run via the Framework `csc` — see `tests/README.md`; the app has no test project).

Builds clean (CNC Controls and the full `ioSender` solution). Also the groundwork (and the reliable LittleFS upload path) that the ATC macro-provisioning work reuses to target the `$FI`-discovered LittleFS path instead of a hardcoded one.

#15 USB / Ethernet / simulator connection support + Connect menu

File	+	-
CNC Controls/CNC Controls/SimulatorManager.cs	474	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	208	14
CNC Controls/CNC Controls/AppConfig.cs	165	28
CNC Controls/CNC Controls/BasicConfigControl.xaml	1	0
CNC Controls/CNC Controls/PortDialog.xaml.cs	56	2
CNC Controls/CNC Controls/PortDialog.xaml	43	8
ioSender XL/ioSender XL/MainWindow.xaml	39	2
CNC Controls/CNC Controls/GrblConfigControl.xaml.cs	22	0
simulator/README.md	18	0
CNC Core/CNC Core/TelnetStream.cs	14	3
CNC Controls/CNC Controls/JobControl.xaml.cs	14	2
CNC Controls/CNC Controls/UIUtils.cs	12	4
ioSender XL/ioSender XL/ioSender XL.csproj	12	0
CNC Core/CNC Core/HelperClasses.cs	8	2
ioSender XL/ioSender XL/JobView.xaml.cs	18	2
CNC Core/CNC Core/GrblViewModel.cs	7	0
readme.md	2	0
CNC Controls/CNC Controls/CNC Controls.csproj	2	0
CNC Controls/CNC Controls/Widget.cs	1	1
.gitignore	5	0
CNC Controls/CNC Controls/GrblConfigControl.xaml	1	0
simulator/sim-build.json	1	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	28	0

Adds first-class connection setup to the sender: pick USB (serial), Ethernet (host:port, now accepting hostnames as well as IPv4), or a local grblHAL **simulator** from a tab in the connection dialog, and (re)connect at any time from a menu. (*Updated 2026-06-20: the simulator is now run standalone and connected to over a port; the launch/download/My-Machine dialog was stripped out, and connection-loss + comment-forwarding fixes were folded in.*)

- **Simulator tab — connect-only:** the simulator now runs *standalone* — the user launches grblHAL_sim.exe directly (it opens its own 3D view + config window and listens on a TCP port), and ioSender simply connects to 127.0.0.1:<port>. The tab is reduced to a single *Port* field ("Launch grblHAL_sim.exe first, then connect"); ioSender no longer launches, downloads or manages the simulator process.
- **Connect / Reconnect:** a File > Connect... item opens the dialog; while connected it becomes *Reconnect...* (disconnects, then re-opens the dialog so a different target can be chosen). The app now stays open when started without a connection instead of exiting, so the menu is reachable.
- **Remembered network host:** the dialog's network tab defaults to the most recent IP that connected successfully (persisted as Config.NetworkHost) rather than always the mDNS name grblHAL.local. It starts empty; on a serial connection it is seeded from the controller's \$I-

reported IP if still unset — so after one USB session a later reconnect already offers the controller's real address. Empty falls back to `grblHAL.local`; the bundled simulator (127.0.0.1) is excluded.

- **Prefer network connection (opt-in):** a Settings:App checkbox (`Config.PreferNetwork`, default off). After a serial/USB connection whose \$I reports an IP, ioSender probes `<ip>:23` and, if it answers, automatically switches the live link to the network — status line: *"Connection migrated to network (ip:23)"* — falling back to the serial port if the network connect fails. The probe runs off the UI thread; the switch is deferred and guarded against re-entry, and only fires from a serial link with a known IP.
- **Target status & cues:** the status bar shows the current connection target (`GrblViewModel.ConnectionTarget`), **green** when connected and **red** when not. The connect dialog opens on the tab matching the active target (Serial / Network / Simulator, disambiguated via the `StartSimulator` flag) and **green**-bolds that header; the XL window background tints **pale yellow** while connected to the **simulator** (restored to grey on a real target or when disconnected), so a virtual machine is unmistakable.
- **"Not connected" on a dropped socket:** when the link drops (e.g. the simulator window is closed) the reconnect loop keeps the target name set, so the target box would otherwise still read connected. An `IsConnectionLost` trigger now turns the XL target box red and shows *Not connected* until the connection is re-established.
- **Stop the job on disconnect:** if the controller connection drops *during a running job*, the **client-side** stream is torn down (job state reset to idle) so the UI no longer hangs waiting on ok responses that will never arrive — previously this was handled cleanly only while idle. This is a Stop, not a feed-hold, and because the link is already gone it cannot command the controller; what the machine does physically on comms loss is up to the firmware.
- **Always send comments to the simulator:** g-code comments are forwarded to the simulator regardless of the app's *Send comments* setting — the simulator reads them for tool/stock metadata (`(TOOL ...)`, `(STOCK ...)`) that drives its 3D view and material-removal carve.
- **Startup ordering:** `AppConfig.SetupAndOpen` is split into `LoadConfig` (run synchronously at construction, so config is available before any control's `Loaded` handler reads it) and `OpenConnection` (deferred to `ApplicationIdle` so the main window paints before the — possibly blocking — connection dialog). Transport is chosen by target string (`COMx` vs `host:port`) rather than a leading-digit IPv4 check.
- **Copy current settings to the simulator:** a *Copy to simulator* button on the `grbl:Settings` tab (next to Save) mirrors the live controller settings into the bundled simulator's "My Machine" EEPROM via `SimulatorManager.BuildMyMachineEeprom`, so a later simulator connection boots with this machine's configuration.

Builds clean (CNC Controls and the full ioSender XL + classic solutions) off **master**. The "My Machine" EEPROM builder is now wired to the *Copy to simulator* button (above); the `SimulatorManager` launch / web-builder-download machinery is no longer wired to the (now connect-only) dialog — a candidate for removal in a follow-up. No simulator binary is committed; see `simulator/README.md`.

#16 Validate controller (check-mode g-code conformance test)

File	+	-
CNC Controls/CNC Controls/ValidateProcessor.cs	1091	0
CNC GCodeViewer/CNC GCodeViewer/Renderer.xaml.cs	81	16
ioSender XL/ioSender XL/MainWindow.xaml.cs	3	21
CNC Controls/CNC Controls/CNC Controls.csproj	1	0
CNC Controls/CNC Controls/LibStrings.xaml	3	0
ioSender XL/ioSender XL/MainWindow.xaml	1	1
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	21	0
Locale/*/csv/ioSender.resources.*.csv (7 locales)	7	0

Replaces the placeholder *Validate controller* action (#15) with a real, in-app conformance test: it streams a g-code program tailored to the connected controller's reported capabilities and reports which commands it accepts — without moving the machine.

- **Capability-tailored test:** generated from \$I build options, axis count, \$32 mode, tool count, aux-I/O counts and the work coordinate systems present, so a feature the firmware was never built with is not tested (and cannot be reported as a false failure).
- **Check mode, no motion:** streamed in \$C check mode and parsed only — the machine never moves, so homing and a clear envelope are not required. One feature per line, so an `error:N` pinpoints exactly which command the controller rejected.
- **Robust against grbl's check-mode behaviour:** a check-mode error *latches* the parser (every later line then errors), so the run recovers on each error — reset, re-enter check mode (unlocking first if the reset re-alarmed a homed machine), re-apply the modal set-up — then resumes, always re-confirming check mode before sending another line so a test line can never reach the controller as real motion.
- **Non-destructive:** check mode *commits* G10/G92 writes, so the run snapshots and restores the work offsets / tool table and avoids the un-restorable writes (G28.1/G30.1, and G92 when an offset is active). Machine settings (\$\$) are never written.
- **Progress & results:** a small non-modal panel shows a live pass/fail tally and the current test as it streams; on completion a *View Summary* button opens the full report (grouped by category, error code/message per failure, the pre-run parameter snapshot, Copy-to-clipboard). The controller is left in `Idle` with check mode off.
- **3D visualization:** the passed bounded-motion features are assembled into a runnable program (absolute G90 moves at a fast feed) and loaded into the buffer, so the user can press Cycle Start and watch the toolpath run in the 3D view via the normal job path. The viewer also gains an *always-active machine scene* (work envelope, axes and a live tool cone shown when homed even with no program loaded), plus fixes to the tool/executed-trail animation subscription and a bounded executed-trail advance (an out-of-range block was an unbounded spin).

Right-click the **Target** status item → *Validate controller*. Builds clean; the only failures on a stock grblHAL are commands it genuinely does not implement (e.g. G90.1, G61.1, G64, M52; M56 needs parking-override enabled).

#17 Restore main window position across launches

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	58	7
CNC Controls/CNC Controls/AppConfig.cs	2	0

The "Restore last window size on startup" option restored only the window *size*; the position was discarded (clamped to the top-left). This persists the position too.

- **Position persisted:** new `WindowLeft/WindowTop` settings, saved on close (using `RestoreBounds` when maximized so the un-maximized rectangle is stored) and restored on startup — but only when the saved rectangle lands on a currently-connected monitor (checked against the whole virtual desktop), so a window saved on a since-removed screen can't open off-screen.
- **Takes effect immediately:** the live "save" flag was only set at startup, so toggling the option mid-session did nothing until a restart. It now updates live and captures + persists the current placement the instant the option is enabled.

Builds clean. The size/position restore builds on the connection support's `CompleteStartup`; the underlying `KeepWindowSize` option is from the ioSender baseline.

#18 grbl:Settings — live edits, change highlight, revert & snapshots

File	+	-
CNC Core/CNC Core/Grbl.cs	356	15
CNC Controls/CNC Controls/GrblConfigControl.xaml	49	6
CNC Controls/CNC Controls/GrblConfigControl.xaml.cs	39	8
CNC Controls/CNC Controls/Widget.cs	25	14
CNC Controls/CNC Controls/RestorePointDialog.xaml	41	0
CNC Controls/CNC Controls/RestorePointDialog.xaml.cs	65	0
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	77	0

Orca/PrusaSlicer-style indication of which controller \$ settings you have changed, on the grbl:Settings **Basic** tab, plus live editing feedback, granular revert and automatic per-Save restore points. Applies to both the grblHAL settings tree and the classic-grbl grid.

- **Live edits in the left-hand list:** edits stage in a pending-changes map (`GrblSettings.PendingEdits`) that the list reads via a new `EditValue`, so the value and its highlight update *immediately* without mutating the controller value. Checkboxes/radios commit on change; text/numeric editors commit on lost focus. Pending edits are flushed to `Value` and cleared on Save; discarded on Reload/Restore.
- **Two highlight states:** **orange/bold** = unsaved edit (`IsEdited`); **blue** = saved to the controller this session but still different from the session-start value (`IsSavedModified`). Groups roll up the same way.
- **Revert from a right-click menu:** *Revert to value at startup* on a setting, and *Revert all in group to value at startup* on a group node (staged as a pending edit, written on next Save).
- **Snapshot on Save + Restore picker:** every Save writes a timestamped restore point (full settings dump in the Backup format, led by a ; changes (N): old→new comment block), per controller identity, keeping the last 20. The **Restore** button opens a picker listing restore points newest-first with a changed-count column and a per-row tooltip showing exactly what each Save changed; *Browse...* falls back to any backup file.
- **Baselines, cleanly separated:** `GrblSettingDetails` tracks the current value, the frozen *startup* value (highlight) and the *loaded* controller value (drives `IsDirty`). Making `IsDirty` mean "differs from the controller" rather than "changed" fixes a spurious "settings changed, save now?" prompt when reverting an edit back to the controller value.
- **Bitfield flag tooltip:** `BITFIELD/XBITFIELD` settings still display numerically, but hovering the value shows the set flags decoded to their labels (one per line, N/A entries skipped) via `GrblSettingDetails.BitfieldLabels`.

Builds clean off **master** (CNC Controls and the full ioSender solution); verified against the bundled grblHAL simulator. Per-setting "revert to factory default" is intentionally deferred — grblHAL exposes no per-setting default (only the global `$RST=$` reset-all), so factory revert would need a future firmware-side snapshot of as-flashed values.

#19 Console — inline terminal-style command prompt

File	+	-
CNC Controls/CNC Controls/ConsoleControl.xaml.cs	117	0
CNC Controls/CNC Controls/ConsoleControl.xaml	28	4
CNC Core/CNC Core/GrblViewModel.cs	20	0
CNC Core/CNC Core/KeyPressHandler.cs	7	0
CNC Controls/CNC Controls/MDIControl.xaml.cs	5	16
CNC Controls/CNC Controls/MDIControl.xaml	1	1
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	42	0

Makes the **Console** tab read like a traditional terminal by adding a command input line at the bottom, while keeping the global single-line MDI strip for the other tabs (3D View, Program). A natural answer to "why is MDI a separate strip instead of a console prompt?" — now it can be both.

- **Reuses the MDI plumbing:** Enter routes the line through the existing MDICommand, which already echoes the command into the console's ResponseLog — so the typed command and its response read inline like a shell. No JobView changes.
- **Shared command history:** a single GrblViewModel.MDIHistory (newest first) is fed by both the MDI strip and the console prompt and surfaced in both — the strip's dropdown binds to it and the prompt recalls it with Up/Down (Esc clears). A command entered in either place is recallable in the other. (The view-model CommandLog is not populated for these entries, so it is not used.)
- **Same guards, auto-focus:** the prompt is locked out while a job runs (same as the MDI strip) and grabs focus when the console becomes visible (tab switch or the pop-out console window) so it's ready to type into.
- **Pop-out for free:** the prompt is self-contained in ConsoleControl, so the detachable console window (which hosts the same control) gets it too.
- **Output context menu:** right-click the response log for *Clear all*, *Clear up to here* (drops the clicked line and everything above it), and *Save...* (writes the in-memory log to a text file).
- **No jog conflict:** the keyboard-jog handler jogs whenever a key is *mapped* to jog (Up/Down are by default) *before* its per-key text-box guard, so the prompt's arrows would otherwise move the machine. ProcessKeyPress now forces no-jog when the focused element is a TextBox tagged "MDI", and the prompt is tagged accordingly — uniformly exempting both the MDI strip's edit box and the console prompt.

Builds clean off **master** (CNC Controls and the full ioSender solution); verified against the bundled grblHAL simulator: commands echo + execute, auto-focus, history recall (Up/Down step through prior commands), and an A/B test confirming Up jogs the DRO when a non-input element is focused but does not when the console prompt is focused. Keys are handled in PreviewKeyDown so the arrows reach the prompt rather than being consumed by the TextBox.

#20 3D view — Ctrl+click to jog + per-axis orientation

File	+	-
CNC GCodeViewer/CNC GCodeViewer/Renderer.xaml.cs	164	52
CNC Core/CNC Core/Grbl.cs	26	1
CNC GCodeViewer/CNC GCodeViewer/RenderControl.xaml	11	7
CNC Core/CNC Core/GCodeEmulator.cs	3	0
CNC Controls/CNC Controls/AppConfig.cs	2	0

Ctrl+left-click in the 3D or top-down (XY) view jogs the machine to the clicked XY position — a quick coarse-positioning aid that complements the jog buttons (park over a corner to set work zero, check alignment, touch-screen rigs).

- **Safe by construction:** the move always retracts **Z to the top of travel first**, then rapids to the new XY, so the traverse can never plough through stock or fixtures. Only X/Y move; plain left-drag still rotates the camera.
- **How it maps:** the click ray is intersected with the work Z=0 plane (HelixToolkit `UnProject`) to recover an XY target, converted to machine coordinates ($MPos = WPos + WCO$), clamped to the soft-limit travel exactly as the jog limiter does, and emitted as two queued `$J=G53` jogs at the controller's max rate (`$110-$112`) so it moves at rapid speed.
- **Guarded:** requires homed + idle + max travel set + soft limits (`$20`) on, with a status-bar reason when a prerequisite is missing. Gated by a `GCodeViewerConfig.ClickToJog` setting (default on).
- **Orientation fix (prerequisite):** the rendered machine frame — work envelope, floor grid and crosshair — now honors the `$23` homing-direction mask + force-set-origin *per axis*, so the view matches any home corner (e.g. top-back-left, X+/Y-/Z-) instead of assuming +X/+Y. Standard +X/+Y/-Z machines render identically to before. `GrblInfo.ForceSetOrigin` now reads the live `$22` bit 3 rather than the `$I OPT 'Z'` flag (absent on some builds, e.g. the simulator), so the orientation is correct even when the option string omits it. The camera bounding box in the always-on machine scene is derived from the same per-axis envelope, fixing a mirrored home corner in the 3D view.
- **Toolbar tidy-up:** the 3D-view toolbar tooltips now show on disabled buttons and are reworded for consistency, the *save view* button is no longer needlessly gated, and the *show job envelope* button enables only with a file loaded. A null-tokens guard in `GCodeEmulator` avoids a crash when the machine scene renders with no program loaded.

Builds clean off `master` (CNC GCodeViewer chain). Verified on the author's machine: Ctrl+click retracts Z then rapids to the clicked XY at the configured max rate, and the envelope/grid orient to the real home corner.

#21 grbl:Settings — Machine Setup Wizard

File	+	-
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	795	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml	278	0
CNC Controls/CNC Controls/MachineCatalog.cs	194	0
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	30	0
CNC Controls/CNC Controls/CNC Controls.csproj	8	0
CNC Controls/CNC Controls/GrblConfigView.xaml	4	0
CNC Controls/CNC Controls/AppConfig.cs	2	0
CNC Controls/CNC Controls/IGrblConfigTab.cs	2	1
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	427	0

A guided, first-run **Machine Setup Wizard** tab in grbl:Settings that configures the machine-description settings a fresh controller needs — so a new machine can be described without hunting through the \$ list. Auto-selected when the machine looks unconfigured (no remembered machine, or \$130–\$132 all zero).

- **Single page, nothing written until applied:** the whole machine description is laid out on one page — machine selector, a clickable home-position picture, a per-axis table, and the remaining homing & limits questions — so it reads at a glance instead of an eight-step click-through. *Apply* writes the changes via `GrblSettings.Save()`.
- **Apply only when there's something to write:** Apply is disabled while the wizard's values already match the controller; the pending-change set recomputes on every edit (machine pick, field, reload). Numeric settings are compared by value, so a formatting-only difference (1 vs 1.000) is not flagged as a change. Hovering Apply lists the exact pending writes (\$id name: old → new).
- **Out of the way:** sits as the *last* grbl:Settings tab (rarely needed after initial commissioning), so Basic settings is the default tab.
- **Machine catalog:** a built-in catalog (`MachineCatalog.cs`) of common hobby machines as manufacturer → product → model drop-downs (or a custom X×Y), each carrying a sensible home corner and force-set-origin default; the first entry is a generic XYZ machine with limit switches. Picking a model pre-fills the page, which the user then confirms or tweaks.
- **Axis table:** an editable per-axis grid — travel limit (\$130–\$132), max rate (\$110–\$112), steps/mm (\$100–\$102), invert direction (\$3) and normally-closed limit (\$5) — edited in place.
- **Home corner:** a clickable isometric box — click the corner where the machine homes — sets the X/Y homing directions (\$23) and auto-enables force-set-origin (\$22 bit 3) on grblHAL; Z is fixed to the top of the gantry. This is the same convention that orients the 3D view (#20). The axis table also carries a per-axis **Home min (\$23)** checkbox kept in sync with the picture, so the homing direction is visible/editable per axis (Z's box is locked to “top”).
- **Homing & limits:** hard limits (\$21) default on, with the remaining global questions as a short list and the explanatory help moved into per-input tooltips. A right-justified *Firmware Info* button shows the live \$I build output in a non-modal dialog.
- **Remembered & forgettable:** the chosen machine is saved (`AppConfig.LastMachine`) and restored next launch — keeping the live controller values over the catalog preset on restore — and a *Forget machine* button clears it so the wizard reappears next time.

- **Correct write order & honest errors:** grblHAL rejects soft limits (\$20=1) unless homing is enabled (`error:10`). Apply now enables homing by the user's intent (writing \$22 even on a fresh controller where it is currently off, instead of gating on the live state) and writes soft limits in a second pass — after \$22 — since `GrblSettings.Save()` writes in ascending id order. Soft limits are only requested when homing will be on. On failure it lists the exact rejected \$ settings and the controller's reason rather than a generic "failed to write settings".

Builds clean off `master` (CNC Controls and the full ioSender solution). UI verified by the author against a live controller and the bundled simulator; interactive \$3 direction-verify and homing-cycle-order editing were intentionally left out of this first cut. The first-run gate that forces the wizard to the foreground until a machine is applied — and its skip-when-connected-to-the-simulator behaviour — depend on connection-side plumbing and ride along in the integration branch rather than this stand-alone PR. The "copy this machine into the simulator's My Machine profile" action now lives on the `grbl:Settings` tab (#15).

#22 Keyboard jog — keep active when Job-view focus drifts

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	19	0
ioSender XL/ioSender XL/JobView.xaml.cs	4	1

Keyboard jogging only fired through `JobView.OnPreviewKeyDown`, which needs keyboard focus inside the Job view's tree. Interacting with a flyout, side panel or menu moves focus out, so the arrow keys stopped jogging until the view was re-focused (e.g. by switching tabs). This keeps jog alive on the Job page wherever focus has drifted.

- **Window-level forwarding:** the existing `MainWindow` tunneling `PreviewKeyDown` (always fires) forwards jog keys to `JobView.ProcessKeyPreview` when the Job view is the current view but is not keyboard-focused. The focused case is unchanged — `JobView` still handles it, including its MDI/DRO/spindle/work-params jog gates.
- **Skips text input:** forwarding is suppressed when focus is in any `TextBoxBase`, so typing in the MDI strip or console prompt never jogs.
- **Clean stop:** a mirrored `PreviewKeyUp` forwards the key-up too, so a continuous jog started while the view was unfocused still receives its release and stops (no text-input guard here — an in-progress jog must always cancel).

Builds clean off `master` (the full `ioSender` solution). Two-file change reusing the console-shortcut `PreviewKeyDown` hook already on `master`; `ProcessKeyPreview` is promoted to `public` so the window can forward into it.

#23 Go To — optional safe-Z (lift, traverse, descend)

File	+	–
CNC Controls/CNC Controls/GotoBaseControl.xaml.cs	34	8
CNC Controls/CNC Controls/AppConfig.cs	5	0
CNC Controls/CNC Controls/BasicConfigControl.xaml	1	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	14	0

A **Go To** a work-coordinate origin (G54–G59.3), G28 or G30 was a single coordinated rapid — a straight diagonal in machine space that can drag Z through clamps, fixtures or tall stock on the way. This adds an optional safe-Z decomposition so the traverse always happens clear of anything standing up in Z.

- **Three-phase move:** with *Safe Z on Go To* enabled, each Go To becomes G53 G0 Z0 (retract to machine top), then G53 G0 X...Y... (traverse at the safe height), then G53 G0 Z... (descend to the target). Machine Z0 is the homed top — already top-minus-pull-off with force-set-origin — so it never re-trips the Z limit, and it needs no configured clearance height (it clears anything that physically fits under the gantry).
- **All Go To targets:** applies uniformly to the selected work origin and to G28/G30, read from the same \$#-populated coordinate table the work-origin button already used (so G28/G30 get true X/Y-then-Z, not a firmware diagonal). Rotary axes travel with X/Y; only Z is separated.
- **Guarded, with a clean fallback:** gated on the *Safe Z on Go To* option (Settings:App → Main, default on), the machine being **homed** (machine coordinates valid) and **soft limits** (\$20) on so the three rapids are envelope-checked. If any is missing it falls back to the original single coordinated move — no behaviour change for unhomed/soft-limits-off setups.

Builds clean off **master** (both apps). The setting lives in the Base app config so it shows in the always-present Main settings panel regardless of jog mode; grbl's junction deviation (~0.01 mm) means the corners are effectively full stops, so no dwell is needed between phases.

#24 comms — fix telnet/websocket UI deadlock

File	+	-
CNC Core/CNC Core/TelnetStream.cs	17	6
CNC Core/CNC Core/WebsocketStream.cs	12	4

Over a telnet or websocket connection the UI could freeze whenever a modal message box (e.g. a macro M0/MBOX hold) was open while polling continued — a lock-ordering **deadlock** between the read callback and the UI thread.

- **The deadlock:** `ReadComplete` ran a synchronous `Dispatcher.Invoke(DataReceived)` *while holding* `lock(input)`. The UI thread's `PurgeQueue` also takes `lock(input)`, so once the dispatcher was busy (a modal pumping its own message loop) the read callback waited on the UI thread while the UI thread waited on the lock — a classic cyclic wait that hung the app.
- **The fix:** extract the complete replies from the buffer *under* the lock, then release it *before* dispatching them to `DataReceived`. The serial and Eltima streams already dispatched after releasing the lock (via `BeginInvoke`); this brings telnet/websocket in line.

Builds clean off upstream **master** (2.0.47); a pure comms-layer fix, no UI or feature change. Surfaced while testing the ATC Start Job sequence (#25), whose install-probe MBOX hold kept an active telnet poll — exactly the deadlock window.

#25 ATC tool-change macro provisioning (Install ATC + Start Job)

File	+	-
CNC Controls/CNC Controls/AtcMacros.cs	369	0
CNC Controls/CNC Controls/SDCardView.xaml.cs	80	3
CNC Controls/CNC Controls/SDCardView.xaml	4	1
CNC Controls/CNC Controls/CNC Controls.csproj	11	0
CNC Core/CNC Core/Grbl.cs	14	1
CNC Core/CNC Core/YModem.cs	14	5
ioSender XL/ioSender XL/JobView.xaml.cs	6	0
ioSender/ioSender/JobView.xaml.cs	6	0
macros/tc.macro	105	0
macros/probe_tfl.macro	140	0
macros/start_job.macro	52	0
macros/cal.macro	3	0

Turnkey **repeatable tool change** for ATC controllers: ioSender ships the controller-side tool-change macro set and installs it to the controller's persistent **LittleFS**, then seeds an ioSender-side "Start Job" macro that drives the home → set-WCS → reference-toolsetter → run sequence. The novice only sets G28/G30/G59.3 and supplies a 3D probe + toolsetter.

- **Embedded macros + provisioning:** AtcMacros.cs carries cal/probe_tfl/tc.macro as embedded resources and uploads them to /littlefs over **YModem** (absolute /littlefs/<name> path so they land on the right filesystem even with an SD card mounted at root; a atc.sum SHA-256 sidecar detects drift / re-installs).
- **Explicit "Install ATC macros" button** on the SD Card tab is the *only* provisioning trigger — user-initiated, re-verifying the filesystem each click. Auto-on-connect/auto-on-show were removed after proving fragile against controller-I/O timing (could wedge the link or hang on close).
- **\$I capability parsing** (Grbl.cs): ATC=1 → HasATC, ATC=0 → AtcMacrosRequired (an ATC is configured but its tc.macro is missing — prompt to install + reboot), YM → HasYModem. A 2-arg YModem.Upload(path, remoteName) overload targets an absolute remote path.
- **Start Job macro** (both apps): seeded on connect to an ATC controller (@start_job.macro, run line-by-line through the macro pre-processor). The controller-side macros it CALLs stay on LittleFS, resolved by 0<cal> CALL / M6. The Start Job go-to G30/G28 moves are written as an explicit safe-Z sequence (lift to machine top, traverse X/Y, descend) rather than a bare diagonal rapid; the Z probes descend to -140 (below the spoilboard, within \$132).
- **Embed-on-Build:** CNC Controls.csproj disables VS's fast up-to-date check so edits to the external ..\..\macros*.macro embedded resources are actually re-embedded on a normal Build (the fast check ignores external files and would otherwise ship a stale copy).

Builds clean in Release for both apps; the full Start Job sequence was verified end-to-end on hardware (2026-06-18). Kept self-contained on PR 14 by seeding the Start Job macro without an auto function-key (that nicely needs PR 10's Macro.FKey); assign one in the Macro manager if wanted. The 0<cal> CALL error:81 fix lives in PR 11 (label/keyword gap-close) plus a firmware-side macro-search-path fix.

#26 Offsets — editable G28/G30 (Set rapids & stores)

File	+	-
CNC Controls/CNC Controls/OffsetView.xaml.cs	21	2

The predefined offsets G28 and G30 were read-only in the Offsets view — you could only store the *current* machine position. This makes them **editable**: type a target and *Set* now honours it.

- **Set rapids, then stores:** because G28.1/G30.1 can only capture the live position, *Set* first rapids the machine to the edited target with G53 G0, then stores it with G28.1/G30.1. A confirmation prompt spells out the move first (it physically moves the machine); a pending unit change is honoured around the move.
- **Everything else unchanged:** non-predefined work offsets keep their existing behaviour.

Builds clean off `master` (CNC Controls and the full ioSender solution). One-file change to `OffsetView`.

#27 Dialogs — center owner-less modal dialogs

File	+	-
CNC Controls/CNC Controls/MPGPending.xaml	1	0
CNC Controls/CNC Controls/AppConfig.cs	1	1
CNC Controls Probing/CNC Controls Probing/ProbeVerify.xaml	1	0
CNC Controls Probing/CNC Controls Probing/ProbingViewModel.cs	1	1

Two modal dialogs — **MPGPending** (the “MPG mode active” prompt shown during the connect handshake) and **ProbeVerify** (probe-connection check) — set neither `Owner` nor `WindowStartupLocation`, so they opened as independent OS-placed top-level windows with their own taskbar button instead of centering over `ioSender`.

- **Owner + CenterOwner:** each now sets `Owner` to the main window at the call site and `WindowStartupLocation=CenterOwner + ShowInTaskbar=False` in XAML, so they center over the client area and stay attached to the app — matching every other dialog in the sender.

Builds clean off `master`. The other modal dialogs already set an owner; the owned-but-not-centered ones (g-code transform / importer dialogs) were left as-is for now.

File	+	-
CNC Controls/ToolsView.xaml	33	0
CNC Controls/ToolsView.xaml.cs	135	0
CNC Controls/GrblConfigView.xaml.cs	65	20
CNC Controls/IGrblConfigTab.cs	4	1

Reorganises the top-level UI into a clearer commissioning flow.

- **Settings → Grbl + App sub-tabs:** the controller (\$) settings and the sender's own preferences are split into two sub-tabs instead of one long page.
- **New Machine Setup top-level tab:** an overview plus six colour-coded step-tabs, with a startup *gate* that leads a new user to the first incomplete step (step 6 queries the controller filesystem via `AtcMacros.GetStatus` for macro status). Reworks the Machine Setup Wizard (#21) into the step-tab form.
- **New Tools container:** a single home (`ToolsView`) for the commissioning/tuning tools — Stepper calibration & scratch, Surface Spoilboard (#29), Squareness (#31), Trinamic and PID — via the `IGrblConfigTab` contract; top-level Trinamic/PID dropped.
- **Inline grids:** a probe-definition grid (step 5) and a macro-status grid (step 6) surface state without leaving the wizard.

In the integration build. The bulk of the wizard body lives in #21; this entry covers the hosting/restructure (Tools container + sub-tabs + gate). Localization CSVs for the new/renamed tabs are still pending.

File	+	-
CNC Controls/SurfaceSpoilboardWizard.xaml	84	0
CNC Controls/SurfaceSpoilboardWizard.xaml.cs	589	0

Flattens the spoilboard with a boustrophedon raster, generated to the homed machine envelope.

- **Machine-referenced:** the operator touches off *Z only*; XY is referenced to the homed envelope (less an edge margin), so the raster can never overrun a soft limit no matter where Z was zeroed.
- **High-point touch-off:** jog anywhere to the board's highest point and set Z0 there; the cut still references XY to the machine corner automatically.
- **Reuse Z0 + Finish pass + abbreviated perimeter Dry run:** re-cut at the same Z0 (with a cutter/dust-boot prompt), reserve a light final pass, or trace just the perimeter to check extents.
- **Outline = leveling check:** pauses at each corner on the Z0 plane for a dial-gauge reading.
- Runs through the flow-controlled job streamer (Feed Hold / Stop stay live).

In the integration build; hardware-tested.

#30 Load Stock — corner-probe stock measurement

File	+	–
ioSender XL/LoadStockView.xaml	102	0
ioSender XL/LoadStockView.xaml.cs	721	0
ioSender XL/MachineControlPanel.xaml(.cs)	63	0
ioSender XL/MachineControlWindow.xaml(.cs)	96	0
macros/pcorner.macro	143	0

Measures real stock by probing its corners, then sets the work origin and reports geometry.

- **Corner probe via pcorner.macro:** an inline grblHAL NGC program calls the controller-side corner-probe macro per corner; probe feeds come from the selected 3D probe definition (no hardcoded feeds).
- **Outputs:** XY footprint, per-corner Z (flatness), squareness (skew + diagonal Δ), and stock thickness (top – spoilboard reference). A results popup draws the probed quad with corner angles.
- **Copy size:** one click puts X Y Z on the clipboard to paste into the Fusion ioSenderBatchPost add-in (#6) — round-trips the measured stock into the simulator (STOCK) line.
- **Floating run-control panel** (MachineControlWindow) so the probe run can be driven without leaving the tab.

In the integration build; hardware-tested (427×427 mm stock).

#31 Squareness (Auto Square) — ganged-gantry offset tool

File	+	-
CNC Controls/AutoSquareWizard.xaml	97	0
CNC Controls/AutoSquareWizard.xaml.cs	589	0

Facilitates Phil Barrett's auto-square *offset* method for a ganged, auto-squared gantry.

- **Drill an L:** peck-drills a reference L (corner + far-X + far-Y holes, at the framing-square arm lengths, centred on the bed with X/Y nudge to dodge dog/insert holes).
- **Measure & apply:** register a framing square on the pins, enter the gap; the tool converts it ($\text{gap} \div \text{lever} \times \text{rail span}$) to a squaring-offset change, writes \$170-\$172 and re-homes.
- **Ganged-axis selector:** grblHAL reports the offset for all of \$170-\$172 but only the ganged axis accepts a write — the selector targets the right one.
- **Measure-only gauge:** on a build without the offset setting it still drills + measures to show how far out of square the gantry is (correct mechanically). Dry run + Reuse Z0.

In the integration build. Note: the squaring offset is fine-trim only — a grossly racked gantry must be corrected mechanically first.

#32 Program view as a reusable object + background loading

File	+	-
CNC Controls/ProgramView.xaml(.cs)	129	0
CNC Core/GCodeJob.cs	108	49
CNC Controls/GCode.cs	99	33
ioSender XL/MainWindow.xaml(.cs)	79	44
ioSender XL/LoadStockView.xaml(.cs)	68	16
CNC Controls/GCodeListControl.xaml(.cs)	29	3
CNC Controls/{AutoSquare, SurfaceSpoilboard, StepperCalibration}Wizard.xaml.cs	57	9
CNC Controls/JobControl.xaml.cs	13	7
CNC Controls/MacroProcessor.cs	0	14
macros/pcorner.macro	13	8
docs/ (2 design/session notes)	224	0
CNC Core/GrblViewModel.cs, CNC Core.csproj	11	1

"A program is a program", taken further: the single shared program overlay becomes a standalone, streamer-connectable `ProgramView` object, and the loader stops blocking the UI.

- **Reusable program view:** Load File, Load Folder and each wizard create their own `ProgramView` and `Connect()` it to a push/pop stack — the overlay hosts whichever is active, and the loaded job is no longer a special "null" case. One Cycle Start runs the active view.
- **Continuous block numbering:** an explicit N word is shown in the Block column and hidden from the G-code column (Data stays intact for streaming); unnumbered lines (O-word calls, comments) continue previous + 1.
- **Background loading:** Load File / Load Folder parse on a worker thread — the per-line parse and the end-of-load bounding-box emulation run off the UI thread, blocks flush to the bound list in batches (rows appear as files are read), and a program-view-scoped wait cursor replaces the global one. A 322k-line folder combine no longer freezes the app.
- **Also shipped here:** Load Stock "set tool-length reference" option (Start Job parity) and the absolute-seek `pcorner.macro` (workaround for the G53-then-G91-on-inverted-axis firmware bug, filed upstream).

In the integration build; hardware-tested (Load Stock, single-file and folder loads, background load).

#33 Explain G-code on hover (novice tooltips)

File	+	-
CNC Core/GCodeExplainer.cs	634	19
CNC Controls/GCodeListControl.xaml(.cs)	170	20
CNC Core/CNC Core.csproj	1	0

Makes the program view teach: hovering a line shows a plain-language explanation of what the G-code does — aimed at novices.

- **Token-based:** builds the explanation from the parser's own semantic tokens (keyed to a block by line number), so it inherits the parser's modal state — a bare X10 Y0 continuation still reads correctly as a rapid or a cut.
- **Line or selection:** hovering one line explains it ("Cutting move to X 125.4, Y 0; feed 800 mm/min"); hovering a line within a multi-row selection gives a line-by-line breakdown.
- **Full coverage:** a complete G/M-code dictionary plus a raw-line lexer fallback explain bare modal codes (e.g. G54) and views without parsed tokens. Computed lazily per row; skipped (thread-safe) while a background load is still parsing.
- **Reads real programs:** a bracket/parameter-aware lexer explains expression operands (G53 G0 X[#5181]), decodes the well-known #5xxx parameters (G28/G30 positions, probe result, WCS offsets), names O-word CALLs by the /<name>.macro file they run + their arguments, and reads G10 (WCS origin/rotation), G65 P5 (probe-input select) and #-assignments plainly.
- **Click to copy:** the hover balloon is an interactive popup — click it to copy the explanation to the clipboard (a plain tooltip can't be moused into).
- **Localizable:** English for now, but every phrase is produced in one place so it can move to LibStrings later.

In the integration build; hardware-verified.

#34 Probe definition diagrams

File	+	-
CNC Controls/ProbeDefinitionEditDialog.xaml	136	22
CNC Controls/ProbeDefinitionEditDialog.xaml.cs	6	0

The probe definition editor now shows a labelled schematic beside the fields, so a novice can see what each measurement means.

- **Per-type drawing:** switched with the Type dropdown — 3D touch probe, touch plate, tool setter and edge finder each draw their shape and dimension the key measurements the user enters (tip / ball / bit diameter, plate thickness, lip width, setter height, spin speed).
- **Touch-plate lip:** drawn as a down-protruding hook whose inner face registers against the stock side (aluminium).
- **Pure vector** (Canvas + Viewbox), toggled with the same show/hide as the fields — no image assets, theme-friendly.

In the integration build.

#35 Jog distance +/- controller actions

File	+	-
CNC Core/ControllerMapper.cs	11	1
CNC Core/GrblViewModel.cs	2	0
CNC Controls/JogBaseControl.xaml.cs	1	0
CNC Controls/KeyMapEditor.xaml.cs	3	1

Two new assignable controller actions that step the on-screen jog *distance* preset (the 2×4 grid), distinct from the existing *Jog speed* +/- which step the feed preset.

- **Jog distance +/-** appear in the Controller-tab action list; assign them to any button (no default binding).
- Adds `GrblViewModel.CycleJogDistance`, wired by the jog panel to the distance index (clamped to the four presets).

In the integration build.

#36 Probe input follows the selected probe type

File	+	-
CNC Core/Grbl.cs	4	0
ioSender XL/LoadStockView.xaml.cs	6	0
ioSender XL/HeightMapView.xaml.cs	6	0

The program-generating tools now select the controller probe input from the chosen probe's type — the same rule the Probing page already uses — so a stale selection can't send a 3D-probe descent to the wrong input and drive into the work.

- **Rule:** Load Stock and Height Map emit G65 P5 Q<n> for the selected probe — tool setter → Q1, else the main probe → Q0.
- **Why:** an interrupted tool-setter cycle (`tc.macro`) can leave G65 P5 Q1 selected; a later probe would then watch the tool-setter line and stab the spoilboard.
- Gated on new `GrblInfo.HasToolSetter` (only meaningful when a tool setter exists to select between).

In the integration build; hardware-verified (Load Stock).

#37 One in-place streaming path (stayPut removed)

File	+	-
ioSender XL/MainWindow.xaml.cs	49	66
CNC Controls/MacroProcessor.cs	12	43
ioSender XL/LoadStockView.xaml.cs	1	1

With each program view self-contained, the old `stayPut` flag and the “stream-in-place vs load-into-job” fork were a relic of the single shared job view. Collapsed to one path.

- **One streaming path:** every streamed macro/wizard run streams a transient with full flow control (Feed Hold/Stop stay live) and **never touches the loaded job** (`GCode.File`) or the Job tab. Before, wizards other than Load Stock replaced your loaded program when they ran.
- **Own view per run:** a tool that owns a program view (a wizard) marks its own; a plain streamed macro gets a dedicated run view (titled with the macro name) that auto-dismisses ~20 s after it finishes.
- **Multi-burst safe:** a run flushes several bursts (a park move, then each `0< ... > CALL`); the streamer source reverts per burst, guarded so a finishing burst can’t clobber the next, and the view stays connected across all of them.
- Deletes the `stayPut` param, the `RunStreamedJob` job-clobber path + its wiring, and the orphaned tab-restore helper — a net code removal.

In the integration build; hardware-verified via a clean Load Stock run (multi-burst / directives / O-words). Not yet exercised on hardware: the plain-macro run view (only a large *streaming* flyout macro reaches it).

File	+	-
CNC Controls/SimulatorManager.cs	309	0
ioSender XL/JobView.xaml.cs	46	0

Keeps the bundled grblHAL simulator in step with whatever controller you connect to, so a probe / rotation / multi-axis feature behaves on the sim exactly as on the real firmware.

- **Options → signature:** on connect, the controller's behaviour-affecting build options (axis count, probe, WCS rotation) are read from `GrblInfo` into a set of compile symbols and a short 12-hex signature.
- **Cache ladder:** already-active build → locally-cached `grblHAL_sim-<sig>.exe` → a `sim-<sig>` release on the fork (public download, no token) → otherwise dispatch the parameterized `build-matched-sim` CI and pick up the result. The set of `sim-<sig>` releases acts as a shared remote build cache.
- **Token only to dispatch:** a GitHub token (`GH_TOKEN`, `workflow` scope) is needed only to trigger a build — every download is public. Runs on a background thread off `InitSystem`, never blocks connect, is skipped when talking to our own simulator, and won't re-dispatch an in-flight signature.

In the integration build; the Simulator-fork CI (`build-matched-sim.yml`) validated green end-to-end (dispatch → per-signature release → public download). The real on-connect round-trip is pending a hardware spot-check.

#39 Re-establish modal state on a mid-program start

File	+	-
CNC Controls/StreamPump.cs	22	0

“Start from this toolpath” queues a G90 G94 / G17 / G21 prolog to re-establish modal state (the folder combiner strips each per-op file’s header, where G21 lived). The legacy streamer drained that queue, but the `StreamPump` streams `source.Data` directly and never touched `source.Commands` — so the prolog was silently dropped on a mid-program start.

- **Symptom:** a mid-program start inherited whatever units the controller was left in; in G20 the toolpath’s literal-mm coordinates read as inches → targets off the table.
- **Fix:** the pump now sends the queued `source.Commands` lines first, ahead of the first block, and swallows their acks so they don’t advance job-line accounting. Full runs from the top were unaffected (there the prolog is prepended as real blocks).

In the integration build. A latent correctness fix for any pump-based run-from-block.

#40 Load Stock “apply work rotation” defaults off

File	+	–
ioSender XL/LoadStockView.xaml.cs	6	1

Setting a WCS rotation via G10 L2 R armed a grblHAL rotation-transform bug (a rotated G54 move with both X and Y double-applied the second axis’s offset) that soft-limited the *next* program’s first cut rapid. Reproduced on hardware: a -0.08° measured skew crashed the following job; clearing the rotation let it run.

- Default the skew→WCS rotation **off** so Load Stock never silently arms it; the checkbox stays for opt-in.
- The real fix is in the firmware rotation transform (`gcode.c: bit(idx)→bit(idx_0)`), now fixed and flashed; once hardware-verified the default can go back on.

In the integration build. A guard against the firmware rotation bug until the firmware fix is hardware-verified.

#41 Live 3D toolpath + material-removal carve view

File	+	–
CNC GCodeViewer/CarveView.xaml.cs	850	0
CNC GCodeViewer/Renderer.xaml.cs	190	54
CNC GCodeViewer/CarveView.xaml	36	0
CNC GCodeViewer/ConfigControl.xaml.cs	13	1
CNC GCodeViewer/RenderControl.xaml	11	7
CNC GCodeViewer/CNC GCodeViewer.csproj	7	0

A live 3D **carve view** in the toolpath viewer — not just lines on screen, but the stock being *machined away* as the program runs, so you can see the finished shape before you cut it.

- **Machine scene, always on:** the work envelope, axes and a live tool cone are shown whenever the machine is homed, even with no program loaded — a persistent sense of where the tool is in the work area.
- **Program-sized stock:** the stock block is sized to the program (its real footprint read from a (STOCK X Y) comment), drawn solid with the correct top, in work coordinates aligned to the toolpath.
- **Material-removal carve:** a dextral / height-field carve removes material as the tool moves, using the *real cutter bottom profile* (flat / ball / V-bit) on a fine grid, so the carved surface matches the actual tool. Toolpath lines hide during playback to reveal the cut and restore on stop.
- **Play a preview:** press Play for a machine-free preview that animates the program and builds the carve; Reset view restores the default orientation, and a pale stock theme keeps the cut visible.
- **Real machine vs. simulator:** streaming to a *real* machine **disables** the carve — the view freezes so it never competes with motion-critical streaming. To watch the carve run in step with execution, connect to the **simulator** and Cycle Start there.
- **Performance:** in-place dirty-cell mesh updates (no per-frame realloc) and the scene build deferred off the layout pass.

In the integration build. Built up over several phases (envelope / stock / tool cone → toolpath + Play → dextral carve); the validate-controller 3D visualization ([#16](#)) uses the same scene.

#42 Settings redesign — flat tab strip + searchable Grbl settings

File	+	–
CNC Controls/GrblConfigView.xaml.cs	359	56
CNC Controls/GrblConfigControl.xaml.cs	156	26
CNC Controls/KeyMapEditor.xaml.cs	66	40
CNC Controls/GrblConfigView.xaml	41	8
CNC Controls/BasicConfigControl.xaml	27	14
CNC Controls/GrblConfigControl.xaml	27	3
CNC Controls/MainPageEditor.xaml.cs	19	3
CNC Controls/MacroManagerDialog.xaml.cs	14	9
CNC Core/Grbl.cs	10	0
CNC Controls/SettingsPanelRegistry.cs	8	0
CNC Controls/AppConfig.cs	5	0
CNC Controls/AppConfigView.xaml(.cs) (retired)	0	373
Camera / Probing / Lathe / Jog config panels (widen + wrap)	19	10
Locale/*/csv (7 locales)	184	0

The Settings area was two tabs — **Grbl** and an **App Settings** page that was a wall of GroupBoxes plus a row of buttons that each opened a modal dialog. It's now a single **flat tab strip**:

Grbl · App · Jogging · G Code · Keyboard & Controller · Macros · Main Page.

- **Free-text Grbl search:** a leading \$ means “setting id” — \$53 jumps to it, \$5? expands all of \$50–\$59; anything else (a word like Jog or a bare number like 10) matches every setting whose *name* or *value* contains it. Matching groups auto-expand and matches are highlighted; an “**n of m**” readout plus up/down arrows (and **F3/F4**, Enter) step through them.
- **Grbl-settings autosave:** an opt-in toggle (default **off** — these are \$ writes to hardware) with a companion “prompt before auto-saving”; when on, the manual Save button on the Grbl tab hides, mirroring the App-settings autosave.
- **Editors folded in as tabs:** the Key Bindings, Macros and Main Page editors were modal Windows launched by buttons — they're now inline tabs (converted to `UserControls`) that *save on leave* instead of OK/Cancel. The Key Bindings tab only pauses controller dispatch while it is actually shown.
- **App/Jogging/G Code:** the config panels are bucketed by type into the three tabs; App & Jogging columns are 25% wider, Camera + Probing share one column, and panels stretch to fill their column so long labels wrap instead of clipping.
- **Under the hood:** `AppConfigView` is retired — its Save/Restart footer, restart-hooking and auto-save-on-leave moved into the settings host. New strings localized across all seven locales.

In the integration build. Builds clean (Release, EXIT 0); on-hardware review of the high-DPI arrow buttons and panel wrapping pending.

#43 Per-user config folder + standalone config folded into App.config

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	258	1
CNC Controls/CNC Controls/ConfigPanel.cs	97	0
CNC Controls/CNC Controls/LoadStockConfig.cs	37	0
ioSender XL/ioSender XL/Default-App.config	64	0
CNC Core/CNC Core/ControllerMapper.cs	82	27
CNC Core/CNC Core/KeyPressHandler.cs	102	63
CNC Controls/CNC Controls/ProbeDefinition.cs	32	4
CNC Controls/CNC Controls/SettingsPanelRegistry.cs	43	0
Surface/AutoSquare/StepperScratch Wizard .xml(.cs) - ConfigPanel conversion (3 wizards)	121	187
CNC Controls/CNC Controls/ConsoleControl.xml(.cs)	162	6
CNC Controls/CNC Controls/GrblConfigControl + GrblConfigView .xml(.cs)	143	63
Basic/StripGCode/Jog/JogUi ConfigControl + KeyMapEditor + JobControl	126	16
CNC Core/CNC Core/Grbl.cs, GrblViewModel.cs	2	2

App.config now lives per-user in %AppData%\ioSender: on first run the existing app-folder config (plus key maps, probe defs, macros and settings backups) is moved there, and the app-folder copy ships read-only as the reset-to-default template. The standalone .xml files each feature used to write next to it are folded in as App.config sections.

- **Section fold-in:** ProbeDefinitions, the game-controller map, key mappings, and the Surface Spoilboard / Auto Square / Stepper calibration / Load Stock parameter blobs become sections; a one-time importer reads any legacy file then deletes it. A new ConfigPanel<T> base gives the wizards save/restore of their section from a single DTO.
- **Curated defaults:** a shipped Default-App.config is the factory template (auto-saves default off) and the source for "Reset to default".
- **Settings/console polish:** the console gains an output search bar + a font-size control; the Settings tabs share one Save/Restart/Reset footer (Grbl sub-row for reload/backup/restore/copy-to-sim); panels opt into "Reset to default"; *ResetAndUnlock* is a bindable keyboard action; a key binding reads as "modified" only when it differs from its value at startup.

In the integration build. Builds clean (Release, EXIT 0); first-run migration is best-effort and idempotent. On-hardware migration spot-check pending.

#44 Start Job workflow + Verify skew, flyout & offset fixes

File	+	-
ioSender XL/ioSender XL/LoadStockView.xaml(.cs)	229	127
ioSender XL/ioSender XL/MainWindow.xaml(.cs)	88	12
ioSender XL/ioSender XL/JobView.xaml.cs	3	3
CNC Controls/CNC Controls/AtcMacros.cs	6	19
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	7	3
CNC Controls/CNC Controls/OffsetView.xaml.cs	26	9
CNC Controls/CNC Controls/LayoutModel.cs	2	1
CNC Controls/CNC Controls/LibStrings.xaml + Locale/*/csv (7 locales)	8	8

Load Stock is reworked into **Start Job** — the first tab, the guided front end for setting a run up before the Job tab cuts it.

- **Workflow:** the operational tabs are disabled until a controller connects; startup lands on the Job tab so its handshake reads \$I. Start Job auto-selects the configured 3D probe (no picker), zeroes at the front-left corner, and writes `start_job.macro` so the seeded macro/F-key runs the same sequence.
- **Verify skew:** a new pass re-touches each corner in the rotated work frame — the back corners twice (ideal rectangle, then the probed corner) so the gap reads out the stock's out-of-square amount — then parks at G30. The measured-skew rotation sign is corrected (`grblHAL G10 L2 R` aligns with `-atan2(dy,dx)`).
- **Flyout & offset fixes:** pinned sidebar flyouts stay open across tab switches; a flyout *Set* writes the offset directly (it was silently dropped by the streamer-state gate); the Offsets tab *Set All* skips the rapid-to-target confirmation when the machine is already there.

In the integration build. Builds clean (Release, EXIT 0). Start Job macro run + Verify skew validated on hardware; a separate 3D-view stock-orientation issue is tracked.

#45 Run-bar jog preset spinners + startup splash on top

File	+	-
CNC Controls/CNC Controls/JogPresetSelector.xaml(.cs)	106	0
ioSender XL/ioSender XL/MainWindow.xaml	11	2
ioSender XL/ioSender XL/SplashWindow.xaml	1	1
CNC Controls/CNC Controls/MDIControl.xaml(.cs)	14	6

Small quality-of-life fixes to the always-visible run bar.

- **Jog preset spinners:** a new compact selector fills the space on the *State / Check* line — *Dist [▼ value ▲] Jog [▼ value ▲] Feed*. Each field is read-only; the down/up arrows step through the four jog distance/feed presets and **wrap around** at the ends. It binds the shared *JogData* singleton, so the selection stays in sync with the jog pad, keyboard and controller (the preset values are still edited on Settings:App / the Jog tab). Right-aligned to the Program button's edge above.
- **Startup splash stays on top:** the progress splash was `Topmost="False"` and got buried by the main window's black frame almost immediately; it is now `Topmost="True"`, so the whole init sequence (connecting → reading settings → validating setup) is actually visible during the ~10–15 s startup.
- **MDI Send button re-aligned:** the MDI line was rebuilt as a single-row grid (command box + *Send*) that share one row height, and the run bar's *Bare* mode no longer pins *Send* to its own fixed height — so *Send* stays vertically centred against the editable command box (it had drifted after the high-DPI pass dropped its fixed height).

In the integration build. Builds clean (Release, EXIT 0). Splash confirmed on hardware; spinner layout and Send-button alignment confirmed in the running app.

#46 High-DPI audit — text no longer clips at 125–150% scaling

File	+	–
CNC Controls/CNC Controls/*.xaml (38 files)	114	115
CNC Controls Probing/CNC Controls Probing/*.xaml (10 files)	35	35
ioSender XL/ioSender XL/*.xaml (4 files)	18	18
CNC Controls Camera/CNC Controls Camera/*.xaml (2 files)	8	8
CNC Controls Lathe/CNC Controls Lathe/*.xaml (4 files)	7	7
CNC Converters/JobParametersDialog.xaml	6	6
CNC GCodeViewer/CNC GCodeViewer/*.xaml (3 files)	4	4
CNC Controls Dragknife/DragKnifeDialog.xaml	4	4

A reviewed, case-by-case scrub of hard-coded pixel `Width=`/`Height=` across the whole UI, so controls size to their content and no longer clip text when Windows text scaling is set to 125–150%. Roughly 250 attributes across 63 XAML files were classified one by one (not a blind find/replace):

- **Drop fixed Height** on text-bearing controls (buttons, labels, text boxes, combos, radio buttons, group boxes, and the rows that hold them) so they auto-size to the scaled font instead of cropping glyphs.
- **Convert fixed Width to MinWidth** (and floor heights to `MinHeight`) where the value was only a minimum — text buttons, combos, fields and container panels can now grow.
- **Convert fixed-pixel grid rows to Height="Auto"** where the row holds text.
- **Deliberately kept** genuine fixed geometry that must *not* scale with text: icons and images, LED/signal indicators, probe/lathe schematic diagrams, 3D render surfaces, colour swatches, icon-only glyph buttons, data-grid column widths, colon-aligned label columns, load-bearing scroll viewports and fixed dialog chrome.

In the integration build. Builds clean (Release, EXIT 0). High-traffic controls confirmed on hardware (“no more clipped text”). Known follow-ups: the five absolute-`Margin` lathe wizards (ThreadingWizard, ProfileDialog, Turning/Parting/Facing) need a real re-layout rather than an attribute scrub, and are intentionally left for a later pass.

#47 Lathe mode enable/disable checkbox

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	41	0
CNC Controls/CNC Controls/BasicConfigControl.xaml.cs	14	0
CNC Controls/CNC Controls/BasicConfigControl.xaml	1	0

A *Lathe mode* checkbox on the App > Main settings panel, so lathe mode can be turned on or off without hand-editing the config. Previously the only lathe-enable control lived on a settings panel that a lathe view had to load first — and that view/tab was itself gated on lathe already being enabled, a catch-22 that made it unreachable when off.

- **Simple on/off facade** — `LatheConfig.LatheEnabled` maps to the existing `XMode` (Radius when on, Disabled when off) and persists through the same Lathe config section.
- **Shows/hides the Lathe wizards tab** — a new `AppConfig.SetTabPresent` adds or removes the tab in both the persisted layout tree and the legacy flat tab list, inserted after the SD-card tab.
- **Restart to apply** — the tab is only built at startup from the controller's reported lathe mode, so toggling raises `RestartRequired` (see [#48](#)).

In the integration build. Builds clean (Release, EXIT 0). Restores an implementation that had been prototyped then reverted; hardware-confirmed working.

#48 Restart button pulse + restart-on-leave prompt

CNC Controls/CNC Controls/GrblConfigView.xaml	43	1
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	15	0

Makes a pending restart impossible to miss. Some settings (buffer/reset delay, 3D-view enable, main-page layout, and now lathe mode) only take effect at startup; when one changes, the shared Settings footer reveals a *Restart* button. That button now behaves like an alert:

- **Slow red pulse** — while enabled the Restart button animates between bright and dark red (custom template so the theme chrome doesn't paint over it), driven by its `IsEnabled` state so it keeps pulsing across inner-tab switches until the app is restarted.
- **Restart-on-leave prompt** — leaving the Settings area with a restart still pending asks "Restart ioSender now?" (Yes relaunches). Switching between the inner Settings tabs does not prompt.
- **Shared restart path** — the relaunch logic is factored into one `DoRestart()` used by both the button and the prompt.

In the integration build. Builds clean (Release, EXIT 0). Applies to every restart-only setting, since all route through the one shared Restart button. Hardware-confirmed ("works great").

#49 Lathe wizards rebuilt to the app layout idiom (high-DPI)

CNC Controls	Lathe/CNC Controls	Lathe/ThreadingWizard.xaml	275	235
CNC Controls	Lathe/CNC Controls	Lathe/TurningWizard.xaml	50	42
CNC Controls	Lathe/CNC Controls	Lathe/FacingWizard.xaml	49	41
CNC Controls	Lathe/CNC Controls	Lathe/PartingWizard.xaml	47	39
CNC Controls	Lathe/CNC Controls	Lathe/ProfileDialog.xaml	40	30

The five lathe wizards were the last upstream code still laid out on an absolute-Margin canvas — fixed pixel Width/Height and hard-coded positions — so their text clipped and controls overlapped once Windows text scaling was set to 125–150% (they were deliberately skipped in the #46 attribute scrub because they needed a real re-layout, not a mechanical edit). Each wizard body was rebuilt with the app’s normal patterns so it flows and scales:

- **Standard idiom** — vertical StackPanel/Grid with Auto sizing, NumericField + ColonAt label alignment, MinWidth/MinHeight floors, a ScrollViewer for overflow, and grouped GroupBox sections.
- **Threading** — a two-column responsive grid (selection / Dimensions / Tool on the left; Thread values / Options / Cut on the right), with the linuxCNC and Mach3 option boxes sharing one slot to preserve the code-behind’s draw-over behaviour, and the Tool schematics + shape radios re-hosted without absolute margins.
- **Turning / Parting / Facing** — a single scrolling input column with Calculate and the generated g-code pinned at the bottom.
- **Profile dialog** — the fixed-size modal became a SizeToContent window; the CSS control and fixed-RPM field share one slot, and it follows the app theme instead of a hard-coded grey.

In the integration build. Builds clean (Release, EXIT 0). Every x:Name, binding, converter and event handler the code-behinds rely on was preserved — no code-behind changes. The rebuilt layouts are functional and scale correctly; some aesthetic cleanup (spacing/grouping refinement) is still wanted at some point, ideally by someone who runs a lathe.

#50 Tab strips fill their width (StretchTabControl)

CNC Controls/CNC Controls/StretchTabControl.cs	119	0
ioSender XL/ioSender XL/MainWindow.xaml	6	4
CNC Controls Lathe/CNC Controls Lathe/LatheWizardsView.xaml	4	3
CNC Controls/CNC Controls/GrblConfigView.xaml	2	2
CNC Controls/CNC Controls/MachineSetupWizard.xaml	2	2
CNC Controls Probing/CNC Controls Probing/ProbingView.xaml	2	2
CNC Controls/CNC Controls/ToolsView.xaml	1	1
CNC Controls/CNC Controls/CNC Controls.csproj	1	0

The tab headers used to sit bunched at the left of each strip with dead space to the right, so tabs ran together and were hard to pick out. A new `StretchTabControl : TabControl` spreads them to fill the strip: each tab keeps its natural width (plus one space character each side) scaled up proportionally, so a wider label gets a wider tab and the row fills the width.

- **Assigns each header a width** — the default `TabControl` template hosts its headers in a fixed `TabPanel (IsItemsHost)`, so a replacement `ItemsPanel` is ignored; setting each `TabItem.Width` is honoured instead.
- **Recomputed off-layout** — widths are recalculated only on the discrete tab add/remove event and, on resize, from a deferred (`DispatcherPriority.Background`) callback that runs *after* the layout pass. Doing it synchronously from inside layout (`SizeChanged/LayoutUpdated`) re-enters the layout system and mis-measures content; the deferred approach sets the widths and lets one ordinary follow-up pass consume them, with no feedback loop. The trade is that during a drag-resize the tabs show old widths for a frame and snap on release.
- **Applied to** the main tab bar and the Settings, Tools, Lathe, Probing and Machine Setup sub-tab strips.

In the integration build. Builds clean (Release, EXIT 0). Confirmed on the running app: strips fill, first tab flush, resize re-spreads cleanly, and tab content still fills/left-aligns (the label-centering was pulled back out after it leaked into content alignment on content-sized views).

#51 SD Card first-line cleanup (overlap + free-space banner)

CNC Controls/CNC Controls/SDCardView.xaml	6	2
CNC Controls/CNC Controls/GrblFilesystems.cs	3	2

Two small fixes to the SD Card tab's top line.

- **No more overlap** — the "List CNC files only" checkbox and the filesystem-status text were absolutely positioned at fixed x offsets, so the status ran under the checkbox label at larger fonts. They now flow in a horizontal `StackPanel`.
- **Banner hides when uninformative** — `FreeSpaceSummary` only lists a filesystem that actually reports free space; the bare "*name*: mounted" fallback carried no information (the file list already shows the filesystem is present) and just added clutter, so the whole banner disappears when the controller reports no sizes.

In the integration build. Builds clean (Release, EXIT 0). Confirmed on the running app.

#52 Per-tool guidance text on the Tools tabs

File	+	-
CNC Controls/CNC Controls/ToolView.xaml	3	0
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml	11	5
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml	7	1
CNC Controls/CNC Controls/StepperCalibrationWizard.xaml	8	2
CNC Controls/CNC Controls/AutoSquareWizard.xaml	4	4
CNC Controls/CNC Controls/TrinamicView.xaml	8	2
CNC Controls/CNC Controls/PIDLogView.xaml	5	0

Most of the Tools tabs showed a form with no explanation of what the tool did or how to run it. Each now carries a short “About...” heading + wrapped explainer in the tab’s right-hand pane (matching Auto Square and Stepper Calibration, which already had step text).

- **Covered** — Tool table, Surface spoilboard, Stepper calibration (scratch), Trinamic tuner, PID tuner.
- **Layout tidy** — the Stepper-calibration collision warning is contained to the right column (instructions box fills the height); the Surface-spoilboard result sits in its own light panel distinct from the description; Squareness puts the description above the diagram.
- **Localizable** — every string carries an `x:Uid` so it feeds the locale CSVs; English inline is the fallback.

In the integration build. Builds clean (Release, EXIT 0). Confirmed on the running app.

#53 Headless build script + crash logging

File	+	-
build.ps1	105	0
.vscode/tasks.json	69	0
ioSender XL/ioSender XL/App.xaml.cs	72	7
CLAUDE.md	9	1

Build and run the WPF app entirely from the command line / VS Code, without opening the Visual Studio GUI. (PlatformIO can't drive a .NET Framework build — it only builds the C/C++ firmware/sim — so a plain MSBuild wrapper is the right tool.)

- **build.ps1** — kills a running `ioSender.exe`, builds via MSBuild (located with `vswhere`, Enterprise-path fallback), optionally launches. `-Configuration Debug|Release|Both`, `-Launch`, `-Headless`, `-NoKill`.
- **VS Code tasks** — *Build Debug + Launch* (Ctrl+Shift+B), *Build Release*, *Build Both*, all delegating to the one script.
- **Crash logging** — the global handlers (Dispatcher / AppDomain / TaskScheduler) now dump a timestamped, versioned, full-stack entry to `%AppData%\ioSender\ioSender.crash.log` and exit `0xFA11` (64017). Fixes a real bug where a background-thread exception showed a box but never exited, wedging the process. Interactive runs still show a dialog; `IOSENDER_HEADLESS=1` suppresses it so an unattended crash can't hang on an un-clicked box. VS's JIT debugger does not auto-attach.

In the integration build. Debug + Release build clean; both crash paths verified live (log written, exit `0xFA11`).

#54 Rename LoadStock → Start Job (code matches the UI)

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml(.cs) (was LoadStockView)	9	9
CNC Controls Probing/.../StartJobControl.xaml(.cs) (was LoadStockControl)	9	9
CNC Controls/CNC Controls/StartJobConfig.cs (was LoadStockConfig)	10	10
CNC Controls/CNC Controls/AppConfig.cs	6	6
CNC Controls/CNC Controls/LayoutModel.cs	3	3
CNC Controls/CNC Controls/{ICNCView,LibStrings,StreamPump}	4	4
ioSender XL/.../{MainWindow,JobView}.xaml.cs + IProbeTab.cs	3	3
Locale/*/csv (7 locales, 2 files each)	126	126
*.csproj (3 projects)	7	7

The feature is “Start Job” everywhere in the UI, but the code was still LoadStock*. Full rename — there is no back-compat to preserve, so no migration code.

- **Files & classes** — LoadStockView / Control / Config / Settings → StartJob*.
- **Tokens** — ViewType.LoadStock and ProbingType.LoadStock → StartJob; LayoutKeys value, the folded App.config section (LoadStock / LoadStock.xml), the str_tabLoadStock resource key and its locale-CSV baml paths, and the StreamPump temp-log name all follow.
- **Persisted config** — the three tokens saved in %AppData%\ioSender\App.config (tab name, layout component, section key) were patched out-of-band to match.

In the integration build. Debug + Release build clean; headless startup smoke test passes on the renamed config.

#55 Localization sweep — V2 strings into all 7 locales

File	+	-
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	1300	0
Locale/*/csv/CNC.Controls.Probing.resources.*.csv (7 locales)	147	0
Locale/*/csv/ioSender.resources.*.csv (7 locales)	63	0
Locale/*/csv/CNC.Controls.Viewer.resources.*.csv (7 locales)	35	0
tools/locadd.py	36	1

Later V2 features were x:UId'd in XAML but never had LocBaml rows added, so they fell back to English in the other six languages. The self-deriving `tools/locadd.py` was pointed at the current view set and backfilled every missing row.

- **+1545 rows across 7 locales** — 159 new keys in en-US plus the backfills for keys that had reached en-US but not the other locales, so all seven are consistent again.
- **Covers** — Start Job (renamed view + the probing control), the probing-redesign dialogs (`ProbeMotionParams` / `ProbeDefinition*`), the main-page editor, console search, the Tools tab guidance (#52), the carve view, and assorted flyouts/config controls.
- **Baseline, not machine-translation** — each new row carries the English text for a translator to replace; the app already rendered English via fallback, so nothing changes on screen. Comma values RFC4180-quoted; re-running the tool adds nothing.

In the integration build. Lathe wizards are excluded (no `CNC.Controls.Lathe` locale CSV exists — never LocBaml-localized).

#56 Online user manual + in-app context help (F1)

File	+	-
CNC Controls/ManualHelp.cs (new)	112	0
ioSender XL/MainWindow.xaml.cs	13	2
CNC Controls/CNC Controls.csproj	1	0

A new task-oriented **online user manual** — a single self-contained HTML page hosted on GitHub Pages at iosenderv2.github.io/ioSender — plus an in-app hook that opens it *in context*.

- **Context help** — F1 opens the manual at the page for whatever tab is current (a `ViewType`→anchor map in `ManualHelp`, resolving a bundled copy next to the exe or the online copy). The Help menu's *Usage tips* and *A brief tour* are repointed from the upstream wiki to the V2 manual.
- **The manual** (in `docs/manual/`, published from an isolated `gh-pages` branch) — 18 topics threaded into three reading tracks (novice / intermediate / machinist), an A–Z subject index, live search, three hand-built inline SVG diagrams (MCS-vs-WCS, machine anatomy, tool-change flow), 13 screenshots, and a lazy “Watch on the machine” video hook for future walkthroughs.

In the integration build. The manual site + its authoring tools (`docs/manual/*`) are not enumerated above (self-referential docs).

#57 Fixes: Start Job tab strand + program-view overlay width

File	+	-
ioSender XL/MainWindow.xaml.cs	21	0
ioSender XL/JobView.xaml.cs	4	0
ioSender XL/MainWindow.xaml	1	1

Two rough edges surfaced while documenting the Start Job flow.

- **Stranded tab** — tab enablement was driven by fragile `Hold / IsGCLock` event pairs (Start Job's auto-probe locks G-code); a mis-paired clear could leave a connection-gated tab (e.g. Start Job) disabled with no way back. New `RefreshTabsIdle()` reconciles every tab to its correct connection + capability state whenever the controller is idle and nothing is streaming — idempotent, and it never runs during a real job.
- **Program-view overlay** — the generated-program overlay had no maximum width, so it grew to cover the whole tab and hid the Start Job inputs; capped with `MaxWidth="720"` so it stays a right-hand column.

In the integration build. Both regressions trace to the run-bar / `StretchTabControl` era (#45, #50).

#58 Numeric fields select their value on focus

File	+	-
CNC Controls/NumericTextBox.cs	35	0

Tabbing or clicking into any numeric field now selects the whole value, so you can just type the replacement instead of clearing the old number first.

- Applied once in the shared `NumericTextBox`, so it covers every numeric field app-wide (DRO, Settings, Probing, Start Job, jog step, the wizards...).
- Keyboard / tab focus selects immediately; a focusing click lets WPF place the caret natively then selects on mouse-up (plain click only, so a click-drag still keeps your partial selection). Once the field already has focus, later clicks fall through untouched — so editing a single digit still lands the caret where you click.

In the integration build.

#59 Connect: Network default + LAN controller discovery

CNC Core/NetworkScanner.cs	349	0
CNC Controls/PortDialog.xaml.cs	127	3
CNC Controls/PortDialog.xaml	32	6
Locale/*/csv (7 locales)	19	0

The Connect dialog now opens on the **Network** tab by default (most grblHAL controllers are networked), and a new **Scan network** button finds controllers on the LAN so you don't have to know the IP.

- **Discovery by protocol, not open ports.** An async subnet sweep (up to a /24 per interface, 64 concurrent) probes each host and confirms it's really a grbl controller by sending the real-time status request ? and requiring a valid <State|...> report back — then reads \$I to show "grblHAL <version>". Random devices with telnet open are rejected. mDNS (grblHAL.local) is tried first but not relied on: consumer WiFi routers routinely drop mDNS multicast between the wireless and wired segments, so the subnet scan is the real workhorse.
- **Editable host picker.** The IP field is now a combo — type a host, or pick one the scan found (the dropdown shows "host:port — grblHAL x.x", the edit box shows just the host, and OK connects to whatever is current).
- The dialog also no longer hides behind the startup splash (it docks to the top of the screen while the splash is up), and its fields no longer clip at high DPI.

In the integration build.

#60 Drag to reorder tabs (persisted across restarts)

CNC Controls/StretchTabControl.cs	178	0
CNC Controls/TabOrderConfig.cs	48	0
CNC Controls/AppConfig.cs	56	0
ioSender XL/MainWindow.xaml.cs	13	1
CNC Controls/ToolsView.xaml.cs	5	1
CNC Controls Probing/ProbingView.xaml	5	5
CNC Controls/GrblConfigView.xaml	1	1

Grab any tab **header** and drag it left or right to change tab order — on the main bar and on every sub-tab strip (Settings, Tools, Probing). A plain click still just selects the tab; the drag only starts once the pointer passes the system drag threshold, and the cursor switches to a ↔ while dragging. The new order now **survives a restart**.

- **Persisted to whichever store already governs a bar — never a second source of truth.** The Probing and Settings strips (which had no order config before) are saved by the control itself into a new `TabOrder` section of `App.config`, keyed per strip. The main bar and the Tools sub-tabs are already backed by the layout tree, so a drag there writes into `Config.Tabs` / the layout tree — the *same* store the **Edit Main Page** → **Tabs** editor uses, so dragging and the editor always agree (and drag takes effect immediately, no restart needed).
- **Capability-hidden tabs stay put.** Tabs hidden for the current controller (e.g. Lathe Wizards outside lathe mode, Trinamic / PID when unsupported) keep their stored position — only the on-screen tabs reorder among themselves, so a hidden tab can never be dropped from the saved layout.

In the integration build.

#61 grbl:Settings tree populates when opened after connecting

CNC Core/Grbl.cs

12

1

CNC Controls/GrblConfigControl.xaml.cs

25

3

Opening **Settings > Grbl** after connecting to a grblHAL controller could show an empty settings tree — no settings at all, and a \$-search found nothing. The flat-tab Settings redesign builds the settings control eagerly at startup, and during the connect handshake the Grbl tab gets an early activation *after* the controller answers \$\$ but *before* \$I establishes that it reports setting enums. The settings load then took the plain \$\$ path and populated the list group-less, skipping the setting-details/group query that builds the tree — and because the list was now non-empty, every later load skipped that query too, so the group tree was never built.

- **Build the metadata when it's finally available.** The settings load now also fetches the setting-enum details and group tree when the controller reports enums but the tree hasn't been built yet, dropping the stale group-less entries first so they're rebuilt with full name/type/group metadata (no duplicates).
- **Reach the load on entry.** The Grbl tab no longer short-circuits its activation when it was pre-activated (empty) during the disconnected startup pass, so opening the tab after connecting always (re)builds the tree.

In the integration build. Fixes a regression from the Settings flat-tab redesign (#42); supersedes an earlier partial fix that only re-bound the (still-empty) tree.

#62 Probing & Tools sub-tabs share one layout

CNC Controls Probing/EdgeFinderControl.xaml	10	8
CNC Controls Probing/EdgeFinderIntControl.xaml	10	8
CNC Controls Probing/CenterFinderControl.xaml	10	8
CNC Controls Probing/ToolLengthControl.xaml	6	4
CNC Controls Probing/ProbingView.xaml	1	1
CNC Controls/StepperCalibrationWizard.xaml	1	1

A consistency pass so the descriptive/instructions area and the results area look the same across the four Probing sub-tabs (Tool length offset, Edge finder external/internal, Center finder) and the Stepper calibration tool, matching the newer Tools tabs: **instructions on the ambient window grey, results in a white panel**, with clear separation.

- **Instructions on the ambient grey, not a near-white box.** The instruction text sits directly on the window grey (as the Tools tabs do), and each tab's output (position / message / preview) is a bordered white panel.
- **The real culprit was the tab host.** The Probing sub-tabs render inside a `StretchTabControl` that — unlike the Tools one — never set `Background="Transparent"`, so the stock `TabControl` template painted its content area white behind the transparent instructions. Making the Probing host transparent lets the ambient grey show through, so all four tabs finally match.

In the integration build.

#63 Check mode (\$C) moved to a Cycle Start context-menu item

CNC Controls/JobControl.xaml.cs	22	0
CNC Controls/JobControl.xaml	11	1
CNC Controls/StatusControl.xaml.cs	1	11
CNC Controls/StatusControl.xaml	0	10
Locale/*/csv (7 locales)	14	7

The **Check** checkbox next to the *State* field on the status bar was misplaced and rarely used. It's gone from the status bar; the grbl check-mode toggle is now a checkable **"Check mode (\$C)"** item on the **Cycle Start** button's right-click menu — a dry-run / validate toggle now lives with the button that starts a run.

- **Same semantics.** The menu item mirrors the live check-mode state, is enabled only when not running a job and not asleep, sends \$C from Idle to enter check mode, and soft-resets to leave it — exactly as the old checkbox did.
- **Localized.** The new menu string (header + tooltip) is added to all 7 locale CSVs; the retired checkbox label rows are removed.

In the integration build.

#64 Opt-in diagnostic trace log (`-debuglog`)

CNC Core/DebugLog.cs	136	0
ioSender XL/App.xaml.cs	36	5
CNC Controls/GrblConfigControl.xaml.cs	6	0
CNC Core/CNC Core.csproj	1	0

A lightweight, always-compiled-in diagnostic logger — `CNC.Core.DebugLog`. It is **off by default** and costs a single boolean test per call site when disabled, so `DebugLog.Write(...)` statements can be left permanently at the tricky points in the code rather than being hand-added and torn down each time a layout / flow bug needs tracing. Diagnosing the earlier empty-settings-tree regression (#61) meant hand-rolling a throwaway logger; this makes that capability standing.

- **How it's turned on.** Launch with `-debuglog` (all categories) or `-debuglog=settings,comms` (an allow-list); an `IOSENDER_DEBUGLOG` env var does the same for unattended/headless runs (mirrors `IOSENDER_HEADLESS`).
- **Where it writes.** Timestamped lines (`HH:mm:ss.fff [category] message`) to `%AppData%\ioSender\ioSender.debug.log`, next to the crash log, with a per-run banner (version + categories) and automatic roll at 8 MB. Thread-safe append, and never throws — logging can't take the app down.
- **First call sites.** The fragile `grbl:Settings` activation path (`Activate / ConfigureView`) now traces its `HasEnums / IsLoaded / setting & group counts`, so a recurrence of the empty-tree symptom is visible in the log immediately.

In the integration build. Available in every configuration (not Debug-only), gated by the flag.

The root trigger behind the empty-settings-tree saga ([#61](#)), now closed off at the source. The Settings view's inner tab strip raises an initial `SelectionChanged` for its default tab during eager startup layout — before the view is ever shown and, on a network connect, mid-handshake. That fired a premature `Activate(true)` on the Grbl tab while `$I` hadn't yet reported enum support (`HasEnums == false`), which is exactly what loaded the settings group-less.

- **The fix.** A `_viewActive` flag, set only by the top-level `Activate(bool, ViewType)`. `tab_SelectionChanged` now ignores inner selection churn until the view is genuinely active — the top-level `Activate(true)` already enters the current tab itself, so real user tab switches still work, but the spurious startup fire is dropped.
- **Belt-and-suspenders** over the [#61](#) `Load()` guard (which rebuilds the tree metadata whenever it's missing): even if an early activation slipped through, the tree would still build — but now it can't fire disconnected in the first place. Verified with the [#64](#) trace log: the mid-handshake `Activate` line is gone; the first and only activation lands post-`$I` with the groups already populated. Also removes wasted startup work.

In the integration build.

A small startup/testing aid: launch with `-forgetNetwork` to **ignore the saved connection target for that run** and open the connection dialog instead of auto-connecting the remembered host — from there you can scan the network or pick any transport (serial / network / simulator).

- **Non-destructive.** Nothing is written to `app.config` unless you then choose a target, so the remembered value survives; on the next serial connect it's re-learned from the controller's `$I-` reported IP anyway. It reuses the existing `-selectport` path to force the dialog.
- **Why.** The modal connect dialog delays the handshake, which makes it a clean, repeatable way to reproduce startup-timing bugs (such as the [#65](#) activation race) without hand-editing the config. The connect path also gained a `[connect]` trace line (see [#64](#)) reporting the saved target and flags.

In the integration build.

#67 Demo-video capture markers (-demomarker)

CNC Core/DemoMarker.cs	94	0
CNC Core/GrblViewModel.cs	1	0
CNC Core/CNC Core.csproj	1	0
ioSender XL/App.xaml.cs	14	0
ioSender XL/MainWindow.xaml	32	1
ioSender XL/MainWindow.xaml.cs	76	0

Production aids for recording the manual's demo videos — opt-in via `-demomarker` (or the `IOSENDER_DEMOMARKER` env var) and invisible in normal use. A sibling of the [#64](#) trace log; the full capture-and-composite procedure lives in `docs/demo-videos/`.

- **Marker log.** `CNC.Core.DemoMarker` writes a small CSV (`%AppData%\ioSender\ioSender.demo-markers.csv`, started fresh each launch) of timestamped events: `SESSION_START`, `RUN_START/RUN_END` (from the single `IsJobRunning` edge transition), and `TIMELAPSE_ON/TIMELAPSE_OFF`. A video compositor keys off these to *sync* the app screen-recording to the machine-camera footage and to speed up the timelapsed stretch — no hand-keyframing.
- **Timelapse toggle.** A run-bar toggle (shown only under `-demomarker`, beside the State field) marks the timelapse window live — flip it as you switch the camera to / from timelapse. Traffic-light coloured: green = off (press to start), red = running (press to stop). Fallbacks if you never flip it: auto-on a few minutes after Cycle Start, forced off at job end.
- **Near-free when off:** a single boolean test per call site — nothing is written and the toggle is collapsed on normal runs.

In the integration build. Builds clean (Debug + Release).

#68 OBS auto-record bridge + tool-change cut markers

CNC Core/ObsBridge.cs	168	0
CNC Core/GrblViewModel.cs	13	0
CNC Core/CNC Core.csproj	1	0
ioSender XL/App.xaml.cs	14	0
ioSender XL/MainWindow.xaml.cs	2	0
build.ps1	13	3

Extends the [#67](#) demo facility so a shoot can be hands-off. When armed with `-demomarker`, ioSender connects to **OBS Studio**'s built-in **obs-websocket** server (v5 handshake, optional auth via `IOSENDER_OBSWS_PASSWORD`, defaults to `localhost:4455`) and drives recording from job state — no manual Record button. Reuses the websocket-sharp dependency already in the build; never throws and no-ops if OBS isn't reachable.

- **Auto record. Program load** → `StartRecord`; **program end** (unload) → `StopRecord`. The recording spans the whole session (setup, probing, every cut, tool changes), so it doesn't stop between phases.
- **Cut markers refined.** `RUN_START/RUN_END` now mark the *actual cutting*. Entering the `Tool` state (an M6 tool change) ends the current cut and leaving it starts the next — i.e. `...RUN_END <tool-change> RUN_START...` — so the compositor can treat cutting spans and tool-change gaps differently.
- **Launch pass-through.** `build.ps1` now forwards any trailing tokens to the launched exe, e.g. `.\build.ps1 -Launch -demomarker -forgetnetwork`.

In the integration build. Builds clean (Debug + Release). Camera-agnostic — drives OBS, so it works with any source (RTSP cams, screen capture). See [docs/demo-videos/](#).

#69 Per-Monitor V2 DPI awareness

ioSender XL/app.manifest	33	0
ioSender XL/MainWindow.xaml.cs	40	0
ioSender XL/App.config	5	0
ioSender XL/ioSender XL.csproj	1	0

ioSender was **System-DPI-aware** (no manifest) — it used a system-DPI value cached at logon, so a resolution / scale change made in the current session (or a stale per-monitor override) could leave it rendering at the wrong scale until the next sign-out. It is now **Per-Monitor V2** aware, reading the *live* per-monitor DPI like Edge and VS Code.

- **How.** An `app.manifest` declaring `dpiAwareness = PerMonitorV2` (referenced from the `csproj`), plus the WPF `Switch.System.Windows.DoNotScaleForDpiChanges=false` app-config switch so the visual tree re-scales on a live DPI change.
- **Diagnostics.** A `-debuglog=dpi` trace (see [#64](#)) logs the resolved `DpiScale` / device transform / screen & window metrics at startup and on every `DpiChanged`, so a “wrong size” report can be pinned to a scale value in seconds.
- **Note.** Interop surfaces (3D carve view, camera) should be spot-checked across a live DPI change; the switch can be flipped back to keep launch-time correctness without live re-scaling if needed.

In the integration build. Builds clean (Debug + Release). Verified at 100% / 175% / 300% — the app tracks the live monitor scale.

#70 Named G28 fixtures

CNC Controls/NamedPositionConfig.cs	77	0
CNC Controls/OffsetFlyout.xaml.cs	215	3
CNC Controls/GotoBaseControl.xaml.cs	24	0
CNC Controls/OffsetFlyout.xaml	3	0
CNC Controls/AppConfig.cs	3	0
CNC Controls/CNC Controls.csproj	1	0
Locale/*/csv/CNC.Controls.WPF (7 locales)	13	0

A saved library of **named machine-coordinate positions** (“fixtures”) recalled from the **G28** sidebar flyout — for recurring jigs like a 90° sheet-goods fence origin or a machinist-vice corner. grblHAL stores only a single G28 slot, so the library lives app-side (in machine coordinates) and never clobbers it.

- **In the flyout.** An editable, alphabetically-sorted name dropdown sits left of the *Go* button (G30 / G59.3 flyouts are unchanged — those are deliberate out-of-envelope park spots, not fixtures). **Set** stores the current machine position under the box’s name; **Go** rapids to the selected fixture with the same Safe-Z lift as the G28 button (a new `GotoBaseControl.SafeGotoMachine`, app-side G53), falling back to the firmware G28 when no fixture is named.
- **Position-aware.** On focus the box reconciles the name to where the machine actually is — the matching fixture, else the next `Fixture-N` default — so **Set** saves the right thing without hunting.
- **One name per position.** **Set** renames / dedupes / updates in place, and duplicates left by earlier sessions self-heal on launch (keeping your custom name over an auto `Fixture-N`).

In the integration build. Builds clean (Debug + Release). Hardware-verified. Loc: `cbo_fixtures` tooltip in all 7 CNC.Controls.WPF CSVs.

#71 Smoother, faster corner probing

macros/probe_tfl_macro	18	11
macros/pcorner_macro	12	11

Two refinements to the Start Job corner-probe macros (`probe_tfl` / `pcorner`).

- **No more table shudder.** Every post-trigger move — the pull-off between the coarse and latch probes, and the retract after the latch — was a `G0`, so it ran at max rapid *acceleration*: a violent jerk on a 4–10 mm move that shook the whole gantry. They are now `G1 F1000`: identical distance and accuracy (the measurement is the slow `G38.2` latch), but a bounded peak velocity so the ramp is gentle.
- **≤ 1" stock optimization.** The spoilboard probe now rapids straight down to the stored `G28 Z` (the same sequence as the `G28` flyout button) and seeks only a short capped distance; the stock-top probe starts just above the tallest possible 1" top instead of machine-top, cutting its seek from ~100 mm to ~32 mm. Documented as preconditions: stock ≤ ~25 mm and `G28 Z` set just above the spoilboard.

In the integration build. Hardware-verified ("smooth as silk"). On-controller macros — re-uploaded to littlefs by Start Job's checksum provisioning.

#72 Start Job: estimated stock size & Z-thickness check

ioSender XL/StartJobView.xaml.cs	13	0
ioSender XL/StartJobView.xaml	5	2
CNC Controls/StartJobConfig.cs	1	0
Locale/*/csv/ioSender.resources (7 locales)	28	14

The Start Job setup fields are relabelled **Est.** (they are an estimate a measure run refines), and a new **Est. thickness (Z)** field is added. Since the probe macros now assume stock $\leq 1"$ (#71), a red warning appears under the field when the Z estimate exceeds 25.4 mm — live and on load. The estimate persists with the other Start Job inputs; it is advisory only.

#73 Playbooks: one-stop procedure library

docs/playbooks/*.md (14 files)

456

0

The repeatable development procedures — previously scattered through dev notes — are collected into a single checked-in `docs/playbooks/` folder, **one procedure per file**, each with the ordered steps plus a ready-to-run command or copy-paste fragment (substitute the parameters and go).

`README.md` indexes the set.

- **Docs & release:** add a changelog entry (the four places to touch + the detail/TOC HTML skeletons), regenerate `Overview.pdf`, publish the manual site, re-import a manual screenshot, wire a video into the manual.
- **Build & ship:** the build/commit/test loop, the headless `build.ps1`, the Teensy firmware build, the end-of-session wrap-up sequence and conversation-log capture.
- **Cross-cutting:** the localization catch-up pass, running `gh` / the GitHub API on this box, and compositing a demo video.

Documentation only — no code change. Each playbook cites the repo script it drives (`build.ps1`, `tools/locadd.py`, `docs/manual/publish-pages.ps1`, ...) as the authoritative implementation.

#74 Startup dialogs no longer hidden behind the splash

ioSender XL/SplashWindow.xaml(.cs)	14	1
CNC Controls/PortDialog.xaml.cs	4	16

The startup progress splash was `Topmost` and centred, so any dialog that opened during startup was mostly hidden behind it. That was previously worked around for the connect dialog alone by docking it to the top of the screen — but other startup popups (message boxes, machine-setup prompts, the “controller never reported” safety net) still landed behind the splash.

- **Fixed at the source:** the splash now docks itself near the top of the work area, leaving the centre clear for every dialog. The connect-dialog special-case is removed — it simply centres on screen again (still owns to the splash so it wins z-order).

#75 Status-bar messages briefly shown at double height

ioSender XL/MainWindow.xaml.cs

37

0

The status line at the bottom of the window is short and easy to miss. When a new message is written to it, it is now shown at **twice its normal height for 10 seconds** (or until the next message re-triggers the enlarge), then shrinks back — so an important message stands a chance of being noticed. An empty/cleared message reverts immediately, and the base size tracks the theme/DPI font scaling.

#76 Program view: 3-line run view on Cycle Start

CNC Controls/GCodeListControl.xaml.cs	90	0
CNC Controls/ProgramView.xaml(.cs)	66	2
ioSender XL/MainWindow.xaml.cs	14	0

When a wizard *Generate* pops its program view open and you press **Cycle Start**, the view now collapses to a compact **3-line run view** — previous line, current executing line (green), next line — kept centred on the executing line as the run advances, and dropped to the **bottom** of the tab content area (flush above the run bar) so a running program takes little space and stays in the line of sight.

- **Toggle:** click anywhere on the title bar to switch between the compact run view and the full program (hand cursor + hint text make it discoverable).

#77 Selected tab stands out — bold, slightly larger label

CNC Controls/StretchTabControl.cs

62

1

The active tab was distinguished only by its white background, easy to lose track of on the wider strips. The selected tab's **label** now also goes **bold and ~18% larger** so the current tab reads at a glance. Applies to every bar built on `StretchTabControl` (main bar + Settings / Tools / Lathe / Probing / Machine Setup) with no per-view change — see [#50](#).

- **Header only:** the emphasis is set on the tab's header presenter, not the `TabItem` — a `TabControl` re-parents inheritance so font set on the selected `TabItem` would bold the whole page; confining it to the header leaves the page content untouched.
- **No reflow:** each tab keeps its already-assigned width, so enlarging the selected label doesn't retrigger the stretch recompute — the bolder text simply fills its fixed slot (a touch cramped when selected, by design).

#78 Run-bar jog pad restored & the button row rebalanced

ioSender XL/MainWindow.xaml	34	33
CNC Controls/StatusControl.xaml	5	3
CNC Controls/JobControl.xaml	3	3

The shrunk jog pad in the bottom run bar had disappeared: it lived on the leftover space right of the run buttons, and the **Program** toggle added to that row (the program-overlay work) widened it and consumed the leftover, collapsing the pad to zero width.

- **Four-column run bar:** *button row · jog pad · signals+feed · overrides*. The button row is the flexible (star) column and stretches to fill the slack up to the jog pad — its three groups spread across so the run buttons span the width instead of huddling left, with the MDI and State lines following so *Send* stays aligned with *Program*. The jog pad, signals and feed/rapids overrides are content-sized and ride at the right edge, adjacent.
- **Reclaimed the width:** run buttons are now content-sized (one space of padding each side) instead of a fixed 66 / 95 px, and the Signals + override clusters were shrunk ~25%, so the jog pad has room.

#79 Bind any tab to a key — right-click Bind-to-Key + header badges

File	+	-
CNC Controls/TabKeyBinder.cs	259	0
ioSender XL/MainWindow.xaml.cs	122	4
CNC Controls/KeyMapEditor.xaml.cs	142	2
CNC Controls/GrblConfigView.xaml.cs	46	1
CNC Controls/MachineSetupWizard.xaml.cs	35	0
CNC Controls Lathe/LatheWizardsView.xaml.cs	27	1
CNC Controls Probing/ProbingView.xaml.cs	27	1
CNC Controls/ToolsView.xaml.cs	27	2
CNC Controls/AppConfig.cs	19	0
CNC Controls/MachineSetupView.xaml.cs	7	1
CNC Controls/KeyMapEditor.xaml	2	3
CNC Controls/ComponentAvailability.cs	1	1
CNC Controls/LibStrings.xaml	1	1
CNC Controls/CNC Controls.csproj	1	0

Every main-page tab *and* its second-level sub-tabs can now be bound to a keyboard shortcut, so you jump straight to a tab from anywhere instead of hunting through the strip. Builds on the in-app Key Mappings editor ([#3](#)).

- **Right-click any tab → Bind to Key** (or *Change Key / Clear Shortcut*): a small capture modal takes one combination — no need to open the editor and find the action. The current shortcut shows as a dim **badge in the tab's upper-right corner**, live-updating.
- **Full coverage:** the 10 main tabs plus the inner tabs of *Settings* (7), *Probing* (4), *Tools* (7), *Machine Setup* (Overview + 6 steps) and *Lathe Tools* (4). Nested Tab.<Parent>.<Sub> ids select the parent tab then the inner one through a shared ITabBindingHost; bindings persist in Config.TabShortcuts and dispatch at the window level so they fire regardless of focus.
- **Smart no-ops:** a stale binding to a tab that has since become unavailable (capability removed, disconnected, mode disabled) does nothing at all rather than half-switching to the parent. Text-producing combos (no modifier, or Shift only) are never stolen from a focused text box.
- **Editor parity:** the Key Mappings list groups every tab by parent; tab rows highlight when bound (changed from the unbound default), the same whether set via right-click or in the editor, and re-sync on show.
- Also fixed a pre-existing key-capture bug in the editor (a stray FocusManager.IsFocusScope swallowed keypresses) and switched its list to line-by-line scrolling. Renamed the *Lathe Wizards* tab label to **Lathe Tools**.

File	+	–
CNC Controls/IAvailabilityGated.cs	26	0
CNC Controls/StretchTabControl.cs	23	0
CNC Controls/ComponentAvailability.cs	21	32
CNC Controls/ToolsView.xaml.cs	7	33
ioSender XL/JobView.xaml.cs	7	21
CNC Controls/AutoSquareWizard.xaml.cs	9	1
CNC Controls Probing/ProbingView.xaml.cs	8	1
CNC Controls/SDCardView.xaml.cs	6	1
CNC Controls/ToolView.xaml.cs	6	1
CNC Controls/PIDLogView.xaml.cs	5	1
CNC Controls/TrinamicView.xaml.cs	5	1
CNC Controls Lathe/LatheWizardsView.xaml.cs	5	1
CNC Controls/CNC Controls.csproj	1	0

When the connected controller lacks a capability, the tab that needs it is removed and listed — with the reason — under *Edit Main Page > Unavailable*. That reason used to be a hand-maintained switch kept *separately* from the code that actually removes the tab, so the two drifted: the list claimed SD Card needs an SD card while the real test was “any filesystem” (SD or LittleFS).

- **One source of truth:** each gated view now owns its own prerequisite + message through a new `IAvailabilityGated` interface (Probing, Lathe Tools, SD Card, Tool table, Trinamic, PID, Auto Square). The removal and the listing read the same property, so they can’t disagree.
- **No central list:** `StretchTabControl.PruneUnavailable()` — used by both the main tab bar and the Tools sub-bar — drops the unavailable tabs and records their reasons; the old string switch is gone.
- Fixes the SD Card mismatch (both now agree on “has a filesystem”), and Auto Square stays as a squareness gauge when the offset setting is absent, with the limitation noted rather than the tab removed.

Internal refactor; no visible behaviour change beyond the corrected SD Card reason. Release build verified.

#81 No more restart prompt hiding behind the relaunch splash

File	+	-
CNC Controls/GrblConfigView.xaml.cs	18	1

Applying a restart-only change (e.g. toggling lathe mode) and relaunching could leave a “Restart ioSender now?” message box stranded *behind* the new instance’s splash screen — it only surfaced after the freshly launched copy went away, looking like the app prompted *after* it had already restarted.

- **Cause:** the relaunch launches the replacement (splash on top) and then shuts down, and the shutdown path re-enters the Settings “on leave” logic — which, seeing a restart still pending, popped the prompt a *second* time from the dying instance.
- **Fix:** once a relaunch is under way the shutting-down instance suppresses all further on-leave prompts (it has already saved), so no stray dialog is left behind the splash.

Long-standing glitch, unrelated to [#80](#). Release build verified.

#82 Dev playbooks distilled to one-command scripts

File	+	-
tools/add-changelog-entry.ps1	171	0
tools/push-all.ps1	79	0
tools/regen-overview-pdf.ps1	54	0
tools/gh.ps1	38	0
docs/playbooks/*.md (5 files)	42	11

The mechanical [playbook](#) procedures — the ones that are a fixed command sequence rather than judgement — are now small scripts in `tools/`. The value is retrieval over re-derivation: one path plus args instead of reconstructing the command (and its failure traps) every session. The playbooks stay as the invocation note and keep the gotchas.

- **tools/push-all.ps1** — pushes the work all the way out: `origin/integration` and `v2/master`, with an ahead/behind report, a clean-tree guard, and a verify that both refs actually landed (`-DryRun` to preview).
- **tools/regen-overview-pdf.ps1** — regenerates `Overview.pdf` via headless Edge with a fresh `--user-data-dir` each run (without it Edge silently no-ops) and a `LastWriteTime` check that fails loudly if it did.
- **tools/gh.ps1** — runs the portable `gh.exe` with `GH_TOKEN` injected from the registry (harness shells do not inherit it), args passed straight through.
- **tools/add-changelog-entry.ps1** — adds a `#N` entry to this changelog from a JSON spec: it derives the number, computes every count from the file rows and re-sums the grand totals, inserts the detail block, TOC row and at-a-glance row, bumps the header count, and self-checks that all four places agree. You author only the content — this very entry was generated by it.

Tooling only; no application change, so nothing to build.

File	+	-
ioSender XL/ioSender XL/CrashReporter.cs	584	0
CNC AppLaunch/CNC AppLaunch/AppLaunch.cs	106	33
CNC Controls/CNC Controls/PipeServer.cs	51	25
ioSender XL/ioSender XL/App.xaml.cs	48	0
CNC Core/CNC Core/RelaunchSupervisor.cs	38	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	13	0
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	10	0

Three linked robustness features around the app's launch, restart and crash lifecycle. `AppLaunch.exe` — historically the single-instance file-open forwarder — is repurposed as a small, application-agnostic **relaunch supervisor**: `AppLaunch.exe -ExitCodeToRelaunch 240 -- <exe> [args]` starts the child with an `EXITCODE_TO_RELAUNCH` environment variable set and relaunches it whenever it exits with exactly that code (any other code propagates and ends the loop). The env var is the whole handshake; `ioSender` knows nothing about `AppLaunch` beyond it.

- **True single instance.** On startup `ioSender` probes its named pipe: if another instance is already running it forwards the file argument (if any), raises that window, and exits — a second launch never opens a second window. This moved out of `AppLaunch` and into `ioSender`, where the server already lived.
- **Clean supervised restart.** When supervised, the in-app “restart to apply” simply exits with code 240 and lets the supervisor relaunch it — no in-process re-spawn, so the restart prompt can no longer strand itself behind the relaunch splash. Unsupervised runs (development, headless) keep the in-process relaunch as a fallback.
- **Opt-in crash reporting, no backend.** A fatal unhandled exception now writes a real minidump plus a text summary to `%AppData%\ioSender\crashes`. The next launch shows a consent dialog with the summary; “Send report” bundles the dump into a `.zip` (GitHub rejects raw `.dmp`), opens a pre-filled GitHub issue, and docks the file-manager window to a strip across the top of the screen with the zip selected, ready to drag onto the issue — sized in physical pixels and raised past the foreground lock so it works correctly on high-DPI displays. A topmost instruction banner spells out the one step to take.

Builds clean (Debug + Release). Wiring the desktop shortcut / file association to `AppLaunch` is a packaging step (no installer in this repo). Hidden `-crashtest` flag exercises the crash → report path.

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	47	37
CNC Controls Camera/CNC Controls Camera/ConfigControl.xaml.cs	43	0
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	29	0
CNC Controls/CNC Controls/AppConfig.cs	27	1
ioSender XL/ioSender XL/ProgramPanel.xaml	26	6
ioSender XL/ioSender XL/ProgramPanel.xaml.cs	19	0
CNC Controls/CNC Controls/Converters.cs	15	0
CNC Controls Camera/CNC Controls Camera/ConfigControl.xaml	14	0
ioSender XL/ioSender XL/MainWindow.xaml	13	20
ioSender XL/ioSender XL/JobWorkspace.xaml.cs	12	0
CNC Controls Camera/CNC Controls Camera/Camera.xaml.cs	11	0
CNC Controls/CNC Controls/GCode.cs	7	0
CNC Controls/CNC Controls/GCodeListControl.xaml	6	1
CNC Controls/CNC Controls/ICamera.cs	1	0
Locale/*/csv (7 locales x 3 assemblies)	188	0

The menu bar is slimmed to essentials and the File menu is dissolved, with each item rehomed to where it is actually used.

- **Program-view header** – with no file loaded it offers Load File / Load Folder; once loaded it shows the program source with a close (✕). Save and a Transform submenu move to the program list's right-click menu – Save works on any program view, Transform is rebuilt per menu-open.
- **File menu gone** – Connect/Reconnect is a top-level item, Open Console is a double-click on the Console tab (Esc still toggles it), Open Application data folder moves to a new Help – Support submenu, and Exit is dropped (the window close / Alt+F4 quit).
- **Toolbar row removed** – the file-action icons and quick-run macro buttons beneath the menu bar are gone; macros still run by F-key.
- **Camera is opt-in** – instead of always showing (and opening a laptop's built-in webcam), the Camera menu appears only when a video device is bound via a new Device picker + Connect/Disconnect button in Settings – App – Camera.

Builds clean Debug + Release; user-verified. Localized across all 7 locales. Commits 52b51d1 / 54ebcdd / 9511d3e.

File	+	-
macros/pcorner.macro	21	14
macros/probe_tfl.macro	0	147
macros/cal.macro	0	3
macros/start_job.macro	8	49
ioSender XL/ioSender XL/StartJobView.xaml.cs	9	3
ioSender XL/ioSender XL/StartJobView.xaml	2	0
CNC Controls/CNC Controls/StartJobConfig.cs	5	0
CNC Controls/CNC Controls/AtcMacros.cs	6	6
CNC Controls/CNC Controls/CNC Controls.csproj	0	2
SDCardView / MachineSetupWizard / JobView / GrblViewModel (string + comment cleanup)	8	8
Locale/*/csv (7 locales)	21	0

Start Job's corner probe is now a single macro, and it understands a sacrificial spacer/backer board under the stock.

- **One probe macro.** Dropped `cal.macro` and `probe_tfl.macro`; the sole corner probe is `pcorner.macro` — a superset (all four corners, tip radius and feeds from the 3D probe definition, Z soft-limit clamp, per-corner flatness). The live Start Job program already emitted `pcorner`, so nothing changed at run time; the old pair survived only as a pre-Generate seed and is gone, leaving fewer files to install on the controller.
- **Sacrificial spacer/backer.** A new optional *Spacer/backer (Z)* field covers the thin-sheet case — e.g. a 2.5 mm aluminium sheet taped to a 1/4 in MDF backer of the same footprint. The probe finds the real spoilboard in the clear air beside the stock, so `pcorner` now derives an effective floor = spoilboard + spacer and starts the face probe from there: the 2 mm tip lands on the metal instead of dropping into the backer/tape band. A spacer of 0 reproduces the previous spoilboard-only behaviour exactly, so bare-fence jobs are unaffected.

Hardware-validated on a grblHAL Teensy 4.1 rig: the 2 mm probe tip lands on a 2.5 mm sheet edge sitting on a 1/4 in backer, and a spacer of 0 leaves normal-stock probing unchanged.

#86 Start Job: fail fast when a corner is over bare board

File	+	-
macros/pcorner.macro	12	4

With *Measure stock size* on, corners 2–4 are positioned from the estimated stock size. If that estimate is too large a corner lands over bare spoilboard — and previously the top probe there sought all the way down to the board, mistook it for the stock top, then drove a side probe into empty air that only faulted at the search limit. Worse, a Feed-Hold then Stop during that latch could leave the controller needing a reset.

Those reuse corners now cap the top probe at the effective floor (spoilboard + spacer): a genuine corner still triggers on the material above it, but a corner over bare board reaches the floor with nothing there and the probe aborts immediately — no side search into air, and nothing to wedge. The first corner, positioned by hand from G28, still discovers the board as before, so flatness/skew measurement is unaffected.

File	+	-
ioSender XL/UiTestServer.cs	472	0
ioSender XL/App.xaml.cs	23	0
ioSender XL/MainWindow.xaml.cs	10	1

A small in-process HTTP server, **off by default** and started only with `-testserver[=PORT]` or `IOSENDER_TESTSERVER=1|PORT` (default port 8760), that lets an external script drive the running UI and read state back — so a change can be exercised in the real app instead of always being handed off for someone to click. A normal user run never opens a socket.

- **Addressing by x:Uid.** Localization already put a unique `x:Uid` on nearly every interactive control; the server surfaces those at runtime (`UIElement.Uid`), walks the visual tree of the open windows, and acts through each element's *AutomationPeer* — the same machinery real UI-automation uses, so it respects enabled/disabled state and fires the real handlers.
- **Routes (JSON):** GET `/ping`, `/idle`, `/tree`, `/state/{uid}`; POST `/invoke/{uid}`, `/set/{uid}?value=`.
- **Nav tabs are addressable too.** The top-level tabs are built in code, so they carried no `x:Uid`; they now get one from the tab registry, and selecting a tab realizes its (lazily-created) content.
- **No new dependencies, no admin.** A raw loopback `TcpListener` (not `HttpListener`, which would need a `netsh` URL reservation) keeps it zero-config for unattended runs.

Debug and Release verified; the server is inert unless explicitly enabled.

File	+	–
CNC Controls/AtcMacros.cs	9	1
CNC Controls/SDCardView.xaml.cs	8	3

On connecting to an ATC controller, the Machine Setup gate could jump straight to step 6 (“install ATC macros”) even though the macros were already present — the step then painted green a moment later. A timing race between the setup check and the first controller-filesystem listing.

- **Cause.** The macro-status check lists the controller filesystem, which pumps the dispatcher and has a re-entrancy guard. When another listing was already in flight (just after it cleared the shared file table), the status check's own listing was skipped and it read a half-cleared table, so the required macros looked absent — and an absent-looking result was reported as *Missing*, which the gate read as “not installed.”
- **Fix.** The filesystem loader now reports whether it actually performed a listing; when it did not (skipped, or the link was down) the status check returns *unknown* rather than fabricating *Missing* rows. The gate already treats unknown as “no action,” and a genuinely-empty filesystem still lists a placeholder, so a real first-run *missing* case still routes to step 6 correctly.

#89 UI test server matured into a full automation harness

File	+	-
WpfUiTestServer/ (new assembly: engine, status seam, HTTP spec)	1371	0
CNC Core/AppDialogs.cs	92	0
ioSender XL/GrblStatusProvider.cs	53	0
ioSender XL/App.xaml.cs	63	3
MessageBox.Show → AppDialogs (7 projects, ~130 sites)	135	130
x:Uid on named controls (52 XAML files)	112	105
ioSender XL/MainWindow.xaml.cs	6	3

The flag-gated UI test server introduced in [#87](#) was built out into a capable automation harness and lifted into its own **app-agnostic assembly** (WpfUiTestServer, no ioSender references). It still only exists behind `-testserver / IOSENDER_TESTSERVER`; a normal run never opens a socket. Full HTTP reference in WpfUiTestServer/README.md.

- **Drive & assert.** Address any control by `x:Uid` (with `?index=` for duplicates); `invoke/set/select`; `read /state`, `/tree`, and a `/uids` discovery list (uid + type + count). App-level `/status` (connection, controller state, streaming/job, DRO) via a host-supplied provider seam, and `/waitfor` to block on a control or status condition rather than guessing at timing.
- **See it.** `GET /screenshot[{uid}]` returns a PNG of the window or an element.
- **Dialogs no longer block automation.** Every message box now routes through AppDialogs (a `MessageBox.Show`-shaped wrapper — identical for a real user); the harness can pre-arm/answer prompts and read their text back. All ~130 `MessageBox.Show` sites across seven projects were migrated (the fatal crash box excepted).
- **Input.** Keyboard injection (`/key`) and context-menu open/invoke (`/menu`).
- **Failure visibility.** `GET /exceptions` surfaces unhandled/route exceptions the app used to swallow into a crash-and-exit, and a small `ioSender.exit.json` reports the exit code + reason after the app goes away.
- **Addressability sweep.** Added `x:Uid` to every named, addressable control that lacked one (105 across 52 files), plus the generated nav tabs and Machine-Setup step tabs, so the whole UI is reachable.
- **Operator safety.** A pulsing red banner across the top marks when the app is under test-server control.

Off by default; loopback only, no auth — keep it test/dev-gated. New `x:Uids` on a few text-bearing controls await a localization CSV pass (English fallback works). Debug + Release verified.

File	+	-
WpfUiTestServer/* – extracted to standalone repo/package	0	1371
ioSender XL/ioSender XL/ioSender XL.csproj	1	4
CNC Core/CNC Core/CNC Core.csproj	2	5
ioSender XL/ioSender XL.sln	0	10
build.ps1	2	1

The app-agnostic UI test server assembly introduced in [#89](#) now lives in its own public repository (github.com/stevenrwood/WpfUiTestServer) and ships as a NuGet package. ioSender references it like any third-party dependency; the in-repo copy is gone. No user-facing behaviour change — it remains off by default, behind `-testserver` / `IOSENDER_TESTSERVER`.

- **Package, not project.** Both consumers (ioSender XL and CNC Core) swapped their `ProjectReference` for `<PackageReference Include="WpfUiTestServer" Version="1.0.0">`; the project was dropped from the solution and the folder removed.
- **Published via Trusted Publishing.** The standalone repo packs and publishes to NuGet from GitHub Actions using OIDC (no stored API key), converted to an SDK-style `net462` project with package metadata.
- **Build now restores.** These projects had no prior NuGet dependencies, so `build.ps1` gained `-restore` on the MSBuild call. Building in Visual Studio restores automatically; a raw `msbuild` of the solution now needs a restore step too.

Dev/QA infrastructure only. Debug + Release both build-verified against the published package.

#91 AppData cleanup: a shared Backups folder replaces App.config.bak + settings-backups

File	+	-
CNC Core/Grbl.cs	37	81
CNC Controls/AppConfig.cs	46	21
CNC Controls/RestorePointDialog.xaml	1	9
CNC Controls/RestorePointDialog.xaml.cs	1	1
ioSender XL/JobView.xaml.cs	1	0

%AppData%\ioSender collected two separate backup mechanisms over time: a single rolling App.config.bak rewritten on every save, and a settings-backups folder taking a Grbl settings snapshot on every \$-setting save (count-retained, 20 deep). Both are replaced by one shared Backups folder with day-based retention (10 days).

- **App.config** is snapshotted once at startup, before any in-session edits, to Backups\
<datetime>_App.config; Load()'s crash-recovery fallback now reads the newest such file instead of a single .bak.
- **Grbl settings** are snapshotted once per successful *connect* (not on every settings save) to Backups\
<datetime>_Grbl.txt, since a fresh connect-time snapshot is the restore point that matters - a per-edit changelog header is no longer written.
- The Restore-settings picker (RestorePointDialog) is updated to the simplified filename format and shared folder.

Verified live: startup and connect-time snapshots both confirmed written correctly; the old .bak/settings-backups artifacts removed from a real AppData folder without disturbing the live App.config.

#92 Remove start_job.macro file + its seeded macro catalog entry

File	+	-
CNC Controls/AtcMacros.cs	3	51
ioSender XL/StartJobView.xaml.cs	2	17
ioSender XL/JobView.xaml.cs	0	6
macros/start_job.macro	0	11
CNC Controls/CNC Controls.csproj	0	1
ioSender XL/StartJobView.xaml	1	1

Clicking *Generate* on the Start Job tab also wrote the generated program to %AppData%\ioSender\start_job.macro and, on the next ATC connect, seeded a "Start Job" entry in the macro catalog referencing it - so it could be re-run from the Macro list or an F-key outside the tab. But Start Job already runs entirely in-memory via `MacroProcessor.ActiveRun`, the same paradigm as the Auto Square, Stepper Calibration, and Surface Spoilboard wizards (none of which write a file); the disk copy and catalog entry were redundant with that and just left an extra file behind. Removed `WriteStartJobMacro`, `AtcMacros.SeedStartJobMacro`, and the embedded `macros/start_job.macro` template.

#93 Program view: fix Save for wizard previews, stop the popup duplicating the Job tab

File	+	-
CNC Controls/GCodeListControl.xaml.cs	36	6
ioSender XL/MainWindow.xaml.cs	11	41
ioSender XL/MainWindow.xaml	6	18

Two gaps left over from the ProgramView refactor (each Generate->Cycle Start wizard - Start Job, Auto Square, Stepper Calibration, Surface Spoilboard - now owns its own transient ProgramView instead of sharing one overlay):

- **Save program... was permanently disabled** for a wizard's own preview - its enablement still checked only the loaded-job singleton (`GCode.File.IsLoaded`), which is never true for a wizard's separate, transient program. It now also enables for a view showing its own generated program, and writes that program's lines to a file the operator picks.
- **The floating "Program" popup duplicated the Job tab.** With no wizard connected it fell back to showing the loaded job a second time - identical content to the always-docked Job-tab program list (`ProgramPanel`). The popup now hosts a view only when it is genuinely transient (`ProgramView.AutoShow` - a wizard preview or a plain macro run); the "Program" button disables itself whenever there is nothing to show there, since the loaded job already has a persistent home.

Verified live via the UI test server: Program button starts/stays disabled with nothing loaded, enables and shows the generated program on Start Job's Generate, and disables again on leaving the tab.

#94 Fixture definitions: named workholding positions replace the single-slot G28 combo

File	+	-
CNC Controls/CNC Controls/Fixture.cs	192	0
CNC Controls/CNC Controls/FixtureEditDialog.xaml	176	0
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	181	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	103	11
ioSender XL/ioSender XL/StartJobView.xaml.cs	108	14
macros/pcorner.macro	26	15
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	2	211
CNC Controls/CNC Controls/NamedPositionConfig.cs	0	77
CNC Controls/CNC Controls/MachineSetupWizard.xaml	37	2
ioSender XL/ioSender XL/StartJobView.xaml	20	1
CNC Controls/CNC Controls/AppConfig.cs	6	2
CNC Controls/CNC Controls/CNC Controls.csproj	8	1
CNC Controls/CNC Controls/OffsetFlyout.xaml	0	3

A new **Fixture definitions** library: named, typed workholding fixtures (Corner fence to start) each with their own saved machine position, edited from a new Machine Setup wizard step and consumed by Start Job's fixture picker - replacing the old single-slot firmware G28 named-position combo (retired here, folded into fixture instances).

- **pcorner.macro generalized** to read a fixture instance's saved position instead of the firmware's single G28 slot, so multiple named fixtures can each have their own reference.
- **Corner-probing schematic.** The fixture editor draws a clearance circle sized to the live 3D probe's body diameter as the jog target, instead of manually-entered offset fields.

Only Corner fence is wired to a working macro this round.

#95 Apply UiScale zoom to dialogs, not just MainWindow

File	+	-
CNC Controls/CNC Controls/DialogScaling.cs	32	0
9 dialog .xaml.cs files (+1 line each, apply DialogScaling)	9	0
CNC Controls/CNC Controls/CNC Controls.csproj	1	0

Dialog windows (probe/tool editors, job-parameter prompts, port picker, pending-changes, etc.) rendered at 100% regardless of the configured UiScale zoom. A shared `DialogScaling.Apply(this)` call, added to each dialog's constructor, fixes that.

#96 Shared program-comment parser; probe dialog tweaks; touch-plate diameter fix

File	+	-
CNC Controls/CNC Controls/GCodeProgramComments.cs	100	0
CNC GCodeViewer/CNC GCodeViewer/CarveView.xaml.cs	24	49
CNC Controls/CNC Controls/ProbeDefinitionEditDialog.xaml.cs	11	6
CNC Controls Probing/CNC Controls Probing/ProbingViewModel.cs	10	1
CNC Controls/CNC Controls/ProbeDefinitionEditDialog.xaml	11	2
CNC Controls/CNC Controls/ProbeDefinition.cs	7	3
CNC Core/CNC Core/Grbl.cs	1	1
CNC Controls/CNC Controls/CNC Controls.csproj	1	0

GCodeProgramComments parses a loaded program's (T00L T=n D=d TYPE= ...)/(STOCK X=.. Y=.. Z=..) comment lines (the Fusion ioSenderBatchPost add-in's format) once, shared by every consumer instead of duplicated regex logic - touch-plate probing's edge-radius compensation and CarveView's 3D carve simulation both switched to it. Probe definition dialog tweaks and a touch-plate diameter fix alongside.

#97 Fusion add-in: combine to one .nc; Load File gets outline parity; retire Load Folder

File	+	-
CNC Controls/CNC Controls/GCode.cs	13	126
Fusion Addin/ioSenderBatchPost/ioSenderBatchPost.py	78	88
Fusion Addin/README.md	29	62
CNC Core/CNC Core/GCodeJob.cs	58	2
CNC Controls/CNC Controls/FusionFolderLoader.cs	0	353
CNC Controls/CNC Controls/FolderPicker.cs	0	159
CNC Controls/CNC Controls/AppConfig.cs	2	16
CNC Controls/CNC Controls/JobControl.xaml.cs	3	7
ioSender XL/ioSender XL/ProgramPanel.xaml.cs	3	6
ioSender XL/ioSender XL/ProgramPanel.xaml	4	6
CNC Core/CNC Core/GrblViewModel.cs	5	4
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	5	5
ioSender XL/ioSender XL/MainWindow.xaml.cs	0	9
5 small config/xaml cleanup files	0	5

The Fusion ioSenderBatchPost add-in now **always** combines every posted operation into a single `<folder>.nc` (STOCK/TOOL header, per-op (`--- seq: name (Tn) ---`) section markers, tool changes/rapids restored inline) instead of leaving per-op files for Load Folder to stitch afterward.

- **Load File gets outline parity.** GCodeJob.ParseFileLines now recognizes those section markers and tags sections the same way Load Folder did, so a plain File > Load of the combined output shows the same collapsible, groupable outline.
- **Load Folder retired.** FusionFolderLoader.cs and FolderPicker.cs are gone; GrblViewModel.IsFolderView renamed to HasOutline (now set by either load path).

Phase 1 (the Python add-in) is code-review-verified only - no Fusion 360 available to run a real post in this environment.

#98 Machinist Vise fixture: probe, Start Job generation, unit toggle, accurate drawing

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	438	116
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	256	78
CNC Controls/CNC Controls/FixtureEditDialog.xaml	60	84
macros/pvisecorner.macro	100	0
CNC Controls/CNC Controls/Fixture.cs	44	30
CNC Controls/CNC Controls/ProgramView.xaml.cs	52	7
CNC Controls/CNC Controls/GCodeProgramComments.cs	29	6
CNC Controls/CNC Controls/AtcMacros.cs	20	6
ioSender XL/ioSender XL/StartJobView.xaml	10	12
CNC Controls/CNC Controls/StartJobConfig.cs	5	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	4	1
MachineSetupWizard.xaml(.cs), CNC Controls.csproj	3	2

Machinist Vise moves from a defined-but-unwired fixture kind to a fully working one, end to end:

- **pvisecorner.macro** - a dedicated macro, not a variant of pcorner.macro: the reference sits *over* the jaw interior (pcorner needs its reference *outside* the corner), so the face-probe logic is a mirror image - back off outward, then seek inward.
- **Set/Test position** in the Fixture dialog now actually probes the jaw's front-left corner and stores the resolved position, with async-completion tracking that fixed two real staleness bugs found on hardware: a jogged position captured before a blocking confirm dialog let a hardware MPG pendant move the machine before the probe ran, and Test position was reading controller state before its own async probe had finished.
- **Start Job's BuildViseProgram** sets origin X/Y from the probed jaw corner directly and finds Z by probing the centre of the entered stock footprint.
- **Stock size fields** gained an mm/in unit toggle (display-only - everything downstream still works in mm), are disabled until a fixture is chosen, and Spacer/backer (a Corner-Fence-only concept) is hidden for vise.
- **The selected fixture now persists** across restarts, not just the entered sizes.
- **The schematic drawing tracks the selected fixture's kind**: a vise's origin dot sits on the jaw's own corner (not always front-left), and the fixed/moving jaw bars are sized/spaced from the fixture's own Jaw width and Max opening - a dashed line marks the max-opening limit, turning red if the entered stock won't fit.
- **ProgramView.Stock** (declared-or-envelope stock size, scoped only to the loaded job) lets Start Job auto-fill from a loaded program's own (STOCK) comment and sanity-check an oversized/stale entry against it.

Corner Fence remains hardware-validated; vise Set/Test/Start-Job-generation self-verified on hardware this round, drawing changes UI-test-server-verified.

#99 pcorner.macro collision fixes; MacroProcessor truncates oversized comments

File	+	-
macros/pcorner.macro	43	28
CNC Controls/CNC Controls/MacroProcessor.cs	16	1

Two distinct collision bugs, both found probing a fence fixture on real hardware: a stale prior-corner safe-Z used for the pre-top-probe descent on REUSE corners, and the Y-face section descending onto the exact point the top probe had just touched instead of backing outside the face first. Every traverse/retract in the macro also switched from a bare rapid to a controlled feed, so a still-undiscovered logic bug produces a gentle push instead of a full-speed crash.

Separately: grblHAL rejects a line over its receive-buffer size outright ("Max characters per line exceeded") and the stream never recovers - an auto-generated comment with interpolated names (a probe/fixture name) had grown past that unnoticed and derailed an entire Start Job run.

`MacroProcessor.SanitizeComment` now shortens an oversized pure-comment line's interior instead of sending it whole.

#100 WpfUiTestServer: /handoff releases control to the operator; /idle waits for a real paint

File	+	-
CNC Core.csproj, ioSender XL.csproj (PackageReference bump 1.0.0 to 1.2.0)	4	4

Both new capabilities live in the standalone WpfUiTestServer package (github.com/stevenrwood/WpfUiTestServer), bumped here from 1.0.0 to 1.2.0:

- **POST /handoff** (v1.1.0) - for an agent that has been driving the UI unattended up to a point where a human needs to take over. Shows a non-modal popup with caller-supplied instructions (so the operator has full control while reading it, never blocked), removes the "under test-server control" banner, and stops the server - a real stop, not a pause; a fresh `Start()` works again if needed later in the same run.
- **GET /idle waits for a real paint** (v1.2.0) - draining the Dispatcher to Background priority only proves layout/arrange ran; WPF's actual pixel composition happens on a separate compositor thread not synchronized with that queue at all. `/idle` now also waits (bounded) for a `CompositionTarget.Rendering` tick - the real "has this painted" signal.

Dev/QA infrastructure only, off by default behind `-testserver`. No ioSender-side behaviour change beyond the version bump.

#101 Localization: locale rows for this round's new/removed UI strings

File	+	-
Locale/*/csv (7 locales x 2 files) + tools/locadd.py	548	321

English-baseline locale rows for every new or retired x:Uid introduced this round, across all 7 locales via `tools/locadd.py` - Fixture definitions, the retired G28 named-position combo, Fusion add-in outline parity, Machinist Vise fixture (Set/Test, schematic, Jaw width/Max opening), and Start Job's mm/in unit toggle.

#102 Machinist Vise Start Job: fixed a parser-corrupting comment + an MDI queue pacing bug, added a jaw keep-out check

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	115	17
CNC Controls/CNC Controls/JobControl.xaml.cs	13	1
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	19	0
CNC Controls/CNC Controls/FixtureEditDialog.xaml	1	1
CNC Core/CNC Core/TelnetStream.cs	17	1
build.ps1	8	1

The Machinist Vise's Start Job program (jaw-corner origin + stock-top Z probe) has been failing with a storm of `error:71 - Unknown operation found in expression` since it shipped - first hardware run to actually reach the probe traced it down through a genuinely long chase: a suspected firmware issue, a suspected TCP/streaming issue, and finally two real, distinct bugs.

- **Root cause:** `BuildViseProgram` split one comment across two generated G-code lines without closing the parenthesis on the first - `grblHAL` has no multi-line comment continuation, so the dangling `(` corrupted the parser's state for every line that followed, until a lone blank line happened to reset it. Fixed by closing/reopening the comment per line.
- **Found along the way:** the shared MDI/macro command queue (`JobControl.SendCommand/ResponseReceived`) flipped back to `Idle` the instant its local queue emptied, right after writing a line, instead of waiting for that line's real controller ack - so a macro sending several non-motion setup lines in a tight loop fired all of them within milliseconds, zero flow-control pacing. Confirmed via a new opt-in raw comms trace (`-debuglog=comms-tx,comms-rx`). Affects any macro streaming multiple lines, not just the vise.
- **New:** a keep-out check warns (never blocks) if the loaded job's toolpath enters the vise jaws' footprint, tool-radius aware via the `grblHAL` tool table; the `Spacer/backer` field is no longer hidden for the vise kind and now feeds the stock-top probe's safe descent height.
- **Also:** the Fixture definition dialog's Cancel button now issues a Feed Hold (never Stop/Reset) if closed mid-probe, instead of leaving the corner probe running unsupervised behind a closed window.

First real end-to-end hardware validation of the vise Start Job program: jaw-corner Set, stock-top Z probe, TLO-reference tool change, and final work-origin set all confirmed on real hardware.

#103 Start Job: Touch Plate probing, vise partial Measure, TLO-ref toolsetter fix

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	273	54
macros/pcorner.macro	76	38
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	50	10
macros/pvisecorner.macro	14	11
CNC Controls/CNC Controls/Fixture.cs	14	0
CNC Controls/CNC Controls/FixtureEditDialog.xaml	10	1
ioSender XL/ioSender XL/StartJobView.xaml	9	0
CNC Controls/CNC Controls/StartJobConfig.cs	4	1
Locale/*/csv (14 files, 7 locales)	63	0

Touch Plate wired end-to-end as an alternative to the 3D probe for Start Job's own corner/stock probing: a new Stock Size panel selector (Probe: 3D Probe/Touch Plate + Stock conductive), pcorner.macro _ls_mode/_ls_plateoffset globals, and a vise-only Probe: picker in Fixture definitions' Set/Test position (the jaw is bare conductive metal, so no plate-thickness math is needed there — pvisecorner.macro needed zero changes).

- **TLO-reference fix (hardware near-miss).** M6 T8 hardcodes the main probe input (tc.macro's own "T8 = 3D probe in spindle" convention) — wrong for Touch Plate, which has no self-triggering probe, and drove the tool into the toolsetter puck without stopping on the first real test. A new EmitTloReference helper bypasses M6 T8 for touch-plate mode and explicitly selects the toolsetter input instead. Confirmed working on real hardware.
- **Partial Measure for the Machinist Vise** (previously hidden entirely for this fixture kind). Corners 2/4 get a real pcorner.macro face+Z probe; corners 1/3 (blocked by the jaw) get a Z-only probe for flatness data. Width/height computed against the known jaw origin; skew is deliberately not computed — there is no independently-verified 4th point to check squareness against.
- **_floor renamed _bottom** throughout pcorner.macro, and its value grounded in real physical geometry (the vise's 1" frame recess) instead of an arbitrary buffer, since it also drives the REUSE rapid-approach height.
- **Rapids restored** in pcorner.macro/pvisecorner.macro/BuildViseProgram for moves at an already-verified-safe height, undoing an earlier blanket "everything G1" defensive sweep — only genuine near-material descents stay controlled-feed.
- A vise-must-be-empty confirmation before Set position, a 200 mm/min search-feed floor, and an explicit rapid to the approximate corner position before each pcorner.macro call.

Builds clean (Debug+Release). Vise origin Set-via-Touch-Plate and the TLO-reference fix are hardware-confirmed. The vise descent-height formula, partial Measure, search-feed floor, and corner-approach fix are UNVERIFIED on hardware — session paused for a suspected Teensy fault requiring a firmware reflash before further testing.

#104 Settings restore/rollback redesign, G28 fixture-position picker, generated-macro persistence, GCodeListControl crash fix

File	+	-
CNC Controls/CNC Controls/GrblConfigControl.xaml.cs	101	75
CNC Controls/CNC Controls/PendingChangesDialog.xaml.cs	79	1
CNC Controls/CNC Controls/PendingChangesDialog.xaml	23	1
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	25	4
CNC Controls/CNC Controls/MacroProcessor.cs	17	0
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	18	1
CNC Controls/CNC Controls/OffsetFlyout.xaml	3	0
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	8	2
CNC Controls/CNC Controls/GrblConfigControl.xaml	2	0
CNC Core/CNC Core/Grbl.cs	6	0
Locale/*/csv (7 locales)	42	7
tools/run-iosender.ps1	3	2

Bundle of settings/UX groundwork carried from a long session: a Restore-from-file redesign, a named-fixture G28 picker, permanent macro output, and a real crash fix.

- **Restore-from-file redesign:** preview-first (only rows that would actually change, reusing `MachineSetupWizard.TargetDiffers` for the numeric-aware comparison), an OK("Restore settings")/Cancel confirm, and **live per-row coloring** as each setting applies - `PendingChangesDialog` grew an optional `ApplyOne/RollbackOne` delegate mode plus a `SettingChange.Status` enum and matching `DataGrid.RowStyle` triggers, with automatic rollback-with-coloring offered on a mid-run failure. `GrblConfigControl.SetSetting` was reworked from "ask interactively per-setting" to "return success/error, let the bulk-apply caller decide" - `grblHAL` has no bulk/atomic settings apply (each `$id=value` is flashed individually), so rollback is the best available mitigation.
- **Machine Setup stays in sync:** new `MachineSetupWizard.NotifySettingsChangedExternally()` re-checks the setup gate after a Restore, so an already-open wizard reflects restored values instead of showing stale state.
- **G28 flyout: named-fixture picker.** A new read-only `ComboBox` over `Fixtures.Items` - Go navigates to the selected fixture's saved `Coords` via `GotoBaseControl.SafeGotoMachine` instead of the firmware G28 slot when one's selected, falling through to the normal G28 behavior otherwise. Machine Setup still owns `Set`.
- **Real crash fixed:** `GCodeListControl.grdGCode_SelectionChanged` had an unguarded `(DataContext as GrblViewModel).StartFromBlock` that crashed reliably when switching to the Start Job tab, because `SetProgram`'s own `DataContext` reassignment fires `SelectionChanged` mid-transition. Pre-existing bug, unrelated to anything else in this batch.
- **Generated macros persisted:** every `MacroProcessor.Run()` call now writes its code to `%AppData%\ioSender\Generated\<name>.macro` - the streamed program itself was never saved to disk before, so this gives a permanent, inspectable copy for diagnosing "why did it stop early" without a live trace.

- **tools/run-iosender.ps1 fix:** a PS7-expression-style `$x = (if(){} else{})` that Windows PowerShell 5.1 rejects ("term 'if' not recognized"); fixed to statement-form if/else in both spots.

Builds clean Debug+Release. Carried over from an earlier session's feature work; not independently re-verified in this session beyond the build.

#105 Vise touch-plate corner-probe margin fix; corners 1/3 dropped; first clean end-to-end Start Job run

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	94	58

Closes out the Machinist Vise touch-plate corner-probe thread: root-caused why the corner 4/2 face-probe margin kept flip-flopping between two wrong extremes, fixed it, dropped a pair of probes that weren't earning their keep, and ran the whole thing clean on real hardware for the first time.

- **Root cause:** rx/ry (pushed outside the exact edge, the face-probe's outward retreat/descent point) and `_topx/_topy = rx - topClearance` (pulled back inside, the initial top-probe point) are computed from the SAME reference in series inside `pcorner.macro`, not two independent points - and entered vise stock sizes are precision-exact, so the margin was never covering size uncertainty, only physical tip clearance so a vertical descent doesn't land exactly on the corner.
- **Fix:** both margins now derive from the ACTUAL tip radius currently in the collet (`refMarginMm = radius + 5`, `topClearance = refMarginMm + 10`, so the top-probe point always nets 10mm inside the true edge regardless of radius - previously `topClearance(10) < refMarginMm(15)`, guaranteeing an overshoot).
- **Live tip diameter, no firmware tool table (N_TOOLS=0):** new `StartJobView.ActiveOrFallbackProbeDiameter()` prefers the loaded program's own (`T00L T=n D= ...`) comment for the currently loaded tool (`GCodeProgramComments.DiameterFor`, the same source the general Probing tab already uses) over the touch-plate probe definition's fallback diameter field.
- **Corners 1/3 dropped entirely** (jaw-covered edge, Z-only readout) - they never fed size (corners 2/4 vs. the known jaw origin only), origin, or skew (deliberately never computed), just an extra flatness data point, while carrying the same corner-catch risk 2/4 just got fixed for.

Hardware-verified 2026-07-14: corners 2/4 probe cleanly with real working clearance, and a full Start Job run (probe -> size -> park -> set origin -> M2) completed end-to-end for the first time. Builds clean Debug.

#106 (TOOL) comment gains an L= tool-length parameter

File	+	-
CNC Controls/CNC Controls/GCodeProgramComments.cs	53	18
CNC Controls/CNC Controls/ProgramView.xaml.cs	10	0
Fusion Addin/ioSenderBatchPost/ioSenderBatchPost.py	25	6

Extends the Fusion add-in's (T00L T=n D=d TYPE=..) comment syntax with an optional L=<mm> tool-length parameter, so a program can declare each tool's overall length the same way it already declares diameter and shape.

- **Fusion add-in:** reads the CAM tool's `tool_overallLength` parameter (cm -> mm) and emits L=<mm> alongside D=/TYPE=; falls back to a 40mm default when a tool has no usable length.
- **GCodeProgramComments:** parses the new key into `GCodeToolInfo.Length` (same 40mm default for programs generated before this change, or when a comment omits it).
- **ProgramView.DeclaredTools:** new property (mirrors `DeclaredStock`) exposing every tool's parsed diameter/shape/angle/length for the current program instance - available on any `ProgramView`, not just the loaded job.

Verified end-to-end against a real Fusion CAM project: debug dump confirmed `tool_overallLength` is the correct parameter, and the generated .nc file carried correct non-default L= values. Builds clean Debug.

#107 Probe definitions unified on an overall-length measurement, like (TOOL)'s L=

File	+	-
CNC Controls/CNC Controls/ProbeDefinition.cs	8	7
CNC Controls/CNC Controls/ProbeDefinitionEditDialog.xaml	13	5
CNC Controls/CNC Controls/ProbeDefinitionEditDialog.xaml.cs	5	4
Locale/*/csv (7 locales)	35	14

The 3D probe dialog's "Probe length" field/schematic measured stylus-only (body-bottom to tip) - a measurement that doesn't compose with anything else measured from a known datum. Renamed to OverallLength (top of body to end of tip) so it reads the same way a CAM tool's overall length does, and updated the label, tooltip, and schematic dimension line to match.

- **Touch plate:** added a matching BitLength field ("Overall length of bit", default 40mm) plus a schematic dimension line, since the plate probe also needs to know how far the bit's tip sits below the collet.

UI-verified via the WpfUITestServer: both dialogs' schematics and field labels checked by screenshot for the 3D probe and touch plate types.

#108 Lathe mode auto-detected from the controller, manual toggle removed

File	+	-
CNC Core/CNC Core/Grbl.cs	8	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	14	2
CNC Controls Lathe/CNC Controls Lathe/LatheWizardsView.xaml.cs	4	2
CNC Controls/CNC Controls/BasicConfigControl.xaml	0	1

grblHAL's own \$I NEWOPT reply already reports a LATHE capability flag when the controller's Mode of operation setting (Settings > Grbl) is set to Lathe, so the separate Settings: App checkbox was redundant - and could disagree with the controller's actual mode.

- **Grbl.cs** pushes LatheModeEnabled through GrblViewModel on every NEWOPT parse (firing PropertyChanged, mirroring DetectNumAxes's own pattern).
- **MainWindow** persists whatever the controller reports, so next startup's tab-availability check (which runs before a connection exists) is right without waiting on a fresh connection.
- Lathe Wizards' unavailable reason now points at Settings > Grbl > Mode of operation instead of the removed App-tab checkbox.

Unverified on real lathe-enabled hardware - the detection wiring hasn't been exercised against a controller actually reporting LATHE.

#109 Start Job: align Probe/Stock-conductive rows, exact-size vise labels, tighten TLO-ref motion

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml	3	3
ioSender XL/ioSender XL/StartJobView.xaml.cs	27	17
macros/pcorner.macro	25	8

Left-align the Probe: row and Stock conductive checkbox to match the flush-left fields below them instead of a right-aligned label column.

- **Machinist vise fixture:** stock size is measured directly off the vise jaws, not estimated - the size hint text and per-field labels now say "Exact width/height/thickness" instead of "Est. ..." when that fixture is selected.
- **Generated Start Job code:** after setting the TLO reference and pausing at G30, the vise corner-probe sequence used to bounce through several higher-than-necessary moves (safe Z, over to corner 4, back up to Z0, over the stock, down to Z0 again) before probing. It now goes straight from G30 to over the corner-4/2 approach position, drops to Safe Z once, and probes - pcorner.macro takes an explicit #<_ls_maxz> clearance height instead of hardcoding Z0/#<_bottom>+30.

Hardware-verified: Start Job now runs the vise flow start to finish without the extra moves.

#110 Reset-repro test-case generator (Help > Support)

File	+	-
CNC Controls/CNC Controls/ResetReproDialog.xaml	24	0
CNC Controls/CNC Controls/ResetReproDialog.xaml.cs	173	0
ioSender XL/ioSender XL/MainWindow.xaml	1	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	5	0
Locale/*/csv (7 locales)	105	21

Writes a .nc file with an O-word subroutine, called several times, that dwells then moves - a controlled way to reproduce the controller-wedge-on-Reset bug under investigation. grblHAL only allows O-word flow control from a file-backed stream, so the file must be uploaded to SD Card / the on-board filesystem and run from there rather than loaded as a normal job.

- Lets Reset be tested mid-call, and the same file compared over both Serial and Telnet transports.

Tool built and verified to generate a valid file; the actual hardware repro run against it is next session's work.

#111 Durable per-run console log; crash/debug logs consolidated under logs\

File	+	-
CNC Core/CNC Core/ConsoleLog.cs	118	0
CNC Core/CNC Core/DebugLog.cs	1	5
CNC Core/CNC Core/Grbl.cs	27	0
CNC Core/CNC Core/GrblViewModel.cs	11	0
ioSender XL/ioSender XL/App.xaml.cs	6	10
ioSender XL/ioSender XL/MainWindow.xaml	1	1

Every console line the on-screen Console tab shows is now also mirrored to %AppData%\ioSender\logs\console_<run-timestamp>.log - a durable record that survives the 2000-line in-memory trim and, more importantly, survives a UI freeze (the failure mode this was built to diagnose: a firmware debug flood once froze the WPF UI for the length of a job, with no record afterward of what had actually happened). The write runs on a dedicated background thread fed by a queue, so a traffic burst can't freeze the UI a second way. Files are timestamped per run (not a single ever-growing file) and pruned after 10 days.

- **Crash log and debug log consolidated** - both moved from directly under %AppData%\ioSender\ into the same new logs\ subfolder, sharing one resolution helper (Resources.ResolveLogsDirectory()) instead of duplicated fallback logic.
- **Help > Support > "Generate reset test case..."** is now hidden from the menu (a diagnostic tool, not something a normal user needs) - still reachable via UI Automation for test tooling.

Grew out of a multi-session firmware controller-wedge investigation (Reset during a named G-code macro call could leave the controller needing a power-cycle) - this logging groundwork is what made the rapid flash/reproduce/read-log iteration loop possible. Root cause found and fixed upstream in grblHAL core (PRs [#987](#), [#988](#)), hardware-verified.

#112 Program view popup resized to exactly the right third of the client area

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml	11	4

The on-demand Program view overlay was a `Border` anchored right with a fixed `MinWidth="560"` `MaxWidth="720"` - on the app's minimum window width that could occupy up to ~58% of the client area. Replaced with a proper 3-equal-column `Grid.ColumnDefinitions` layout, with the overlay in the rightmost column (`Grid.Column="2"`, `HorizontalAlignment="Stretch"`) - it now always occupies exactly one third of the client width, regardless of window size.

#113 Start Job: touch-plate-safe Measure gating + unit-aware measured-size readout

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	35	9

Two Start Job fit-and-finish fixes, found while HW-testing the Machinist Vise fixture:

- **Measure gating.** A separate touch plate against non-conductive stock only closes the circuit at the plate itself - the stock's own edges never trigger it, so the 4-corner edge probing Measure depends on can't work. The Measure checkbox now auto-disables (and unchecks, so a stale checked-but-disabled state can't reach Generate) whenever Touch Plate + unchecked Stock conductive is selected, with a tooltip explaining the fix (switch to 3D Probe, or check Stock conductive). Re-enables live when either control changes, and is applied correctly on load from a persisted config.
- **Unit-aware readout.** The post-run "Measured stock" summary (X/Y size, flatness, squareness/diagonal delta) and the drawing overlay's edge dimension labels were always shown in mm regardless of the mm/in radio selection. Both now convert through the existing FromMm() unit helper and label the correct unit, matching the input fields above them. The Fusion-add-in clipboard copy (Copy size) and the internal g-code emitter intentionally stay in mm - those are machine-consumed contracts, not display output.

#114 Settings > Simulator tab: pick options, build via CI, auto-launch from Connect dialog

File	+	-
CNC Controls/CNC Controls/SimulatorConfigView.xaml	48	0
CNC Controls/CNC Controls/SimulatorConfigView.xaml.cs	114	0
CNC Controls/CNC Controls/SimulatorManager.cs	160	10
CNC Controls/CNC Controls/PortDialog.xaml.cs	20	0
CNC Controls/CNC Controls/PortDialog.xaml	5	5
CNC Controls/CNC Controls/AppConfig.cs	14	3
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	6	0
CNC Controls/CNC Controls/GrblConfigView.xaml	3	0
CNC Controls/CNC Controls/IGrblConfigTab.cs	2	1
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
Locale/*/csv (7 locales)	49	0
tools/locadd.py, csproj version bumps	3	2

The Connect dialog's Simulator tab used to just be a port field with a comment saying the user launches grblHAL_sim.exe by hand - ioSender no longer managed the process at all. This closes that loop:

- **Settings > Simulator tab** (new, SimulatorConfigView) - pick axes (3-7), probe input, and coordinate-system rotation (WCSROT), then Build. Reuses SimulatorManager's existing build-matched-sim CI workflow dispatch + sim-<sig> release cache (the same one the auto-matched-to-controller flow already uses) but always installs a plain, unsuffixed grblHAL_sim.exe to %AppData%\Simulator - a fixed path independent of the auto-matched system's app-relative simulator\ folder, so the two coexist without interfering.
- **Connect dialog gating.** The Simulator tab is only enabled once that exe exists; when disabled its hint text points at Settings > Simulator. When enabled, clicking Ok launches the exe (if not already running, checked by process name so it also catches an instance started outside this session) before connecting to 127.0.0.1 on the chosen port.
- **Startup auto-reconnect.** EnsureSimulatorRunning() was a stubbed no-op ("the simulator runs standalone now") - un-stubbed to apply the same start-if-not-running logic when auto-reconnecting to a previously-chosen simulator target, so a saved simulator connection still works after an app restart.

SimulatorManager.cs additions are structured as thin new entry points (AppDataSimulatorDir/ExePath/Present, BuildManualOptionSymbols, EnsureAppDataSimulator, PollAndInstallAppData) parallel to the existing EnsureMatchedSimulator/PollForMatchedRelease, sharing a refactored-out DownloadReleaseBytes helper - the auto-matched flow's own code path is unchanged.

#115 Simulator settings: match connected hardware, full ATC support, one-button Machine Setup step

File	+	-
CNC Controls/CNC Controls/SimulatorManager.cs	322	21
CNC Controls/CNC Controls/SimulatorConfigView.xaml.cs	218	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	146	0
CNC Controls/CNC Controls/SimulatorConfigView.xaml	72	0
tools/gen-sim-macros.py	70	0
CNC Controls/CNC Controls/PortDialog.xaml.cs	35	1
simulator/README.md	23	16
CNC Controls/CNC Controls/AppConfig.cs	22	5
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	20	2
CNC Controls/CNC Controls/MachineSetupWizard.xaml	20	0
Locale/*/csv (7 locales)	119	0
PortDialog.xaml, GrblConfigView.xaml, IGrblConfigTab.cs, csproj x3, .gitignore, locadd.py, sim-build.json	15	20

Session-long arc built on the previous Settings > Simulator / Connect-dialog work (#114): closes the gap between "a simulator exists" and "a simulator that actually behaves like the connected machine."

- **Hardware-matched defaults, every time.** Settings > Simulator now re-syncs its picks from the connected controller's live \$I on every visit (was a one-shot-ever bug - fixed), not just the first time the tab loaded. Machine Setup Wizard gains step 8, "Build simulator matching this machine": one button, no picks, same status readout as the Settings tab (build id + up-to-date/rebuild-needed/not-built messaging), hidden automatically while the active connection IS the simulator (nothing to match against).
- **8 compile-time options**, up from 3: axes/probe/rotation plus Toolsetter, Lathe U/V/W, Safety door, E-stop, and Ganged+Auto-square Y - the full set of genuine, \$I-detectable, simulator-relevant grblHAL build toggles (confirmed against grbl core and the Simulator driver source; lathe MODE and spindle variability turned out to be runtime \$-settings, not compile options).
- **Full ATC support in every built simulator.** Root-caused a real M6T1 "error:20": machines using macro-driven ATC (\$341=Ignore) left the simulator's M6 completely unhandled since it had no tc.macro. Fixed in the Simulator repo: driver.c now bakes ioSender's canonical ATC macros (generated from macros/*.macro by new tools/gen-sim-macros.py) into littlefs at boot, with a non-obvious mount-then-remount fix (found via a local MinGW build, not guessed) so grblHAL's own ATC-detection hook sees them in time. CI now builds from the Simulator repo's `integration` branch (which has this + littlefs/YModem support) instead of `master` (which never had any of it) - both ioSender's dispatch ref and the repo's own release workflow repointed.
- **Live machine settings + NVRAM copy.** Build now also replays the connected controller's \$ settings into the simulator's EEPROM.DAT, same headless-replay mechanism the Grbl tab's existing "Copy to simulator" button uses, generalized to share one implementation.
- **Location fix:** the manually-built simulator lives at `%AppData%\ioSender\Simulator` (alongside App.config/logs/Backups), not a stray top-level `%AppData%\Simulator`.

- **Two IP-clobbering bugs found and fixed** on the Connect dialog: the remembered real-machine IP could get silently overwritten by the simulator's own loopback address on the write side (CaptureConnectedIp) and separately shown incorrectly on the read side (the dialog's own pre-fill logic) - both guarded now.
- **Build-hang fix:** installing a freshly-built simulator over a currently-running instance of itself silently failed (locked file) for the CI-dispatch flow's full 10-minute poll window before giving a misleading "still building" message; now stops the running instance first.

Fully HW-verified end to end multiple times this session: a real CI-dispatched build downloaded and run standalone confirmed \$I reports ATC=1 and M6T1 enters the macro flow; the hardware-default/status/hidden-tabs/IP fixes were all verified live against a real controller + the real simulator via the UI test server, not just build-checked.

#116 Tear-off tabs: detach Program/3D View/Console into their own window

File	+	-
CNC Controls/CNC Controls/TearableTab.cs	161	0
ioSender XL/ioSender XL/JobWorkspace.xaml.cs	3	13

New generic `CNC.Controls.TearableTab.Attach`, built as the foundation for embedding the simulator's own window as a future Job tab, but immediately useful on its own: double-click a center tab's header to detach its content into a standalone custom-chrome window (no native title bar - so double-click is free for a custom gesture instead of the OS's maximize), double-click that window's title bar to dock it straight back into the tab strip at the same spot. No close button and no close/hide affordance on the tab itself - re-docking is the only way out, matching how these tabs already behaved.

- Replaces the Console-specific double-click-to-open-a-duplicate-floating-window special case with the same generic mechanism all three center tabs now share (Program, 3D View, Console) - the old `OpenConsoleWindow/ConsoleWindow` duplicate-window path stays only for its own separate Esc-shortcut toggle feature, untouched.
- **Ctrl+Alt+=** / **Ctrl+Alt+-** zoom the floating window's content in/out (0.5x-3x), **Ctrl+Alt+0** resets - via a `LayoutTransform` so content actually re-measures/reflows at the new size rather than just stretching pixels, applied uniformly regardless of which tab was torn off.
- Fixed same session: a detached window has no ancestor to inherit `DataContext` from, so content relying on it (Console's bound `GrblViewModel`) went blank and silently stopped responding to input until this was propagated explicitly.

HW-verified: tab strip renders correctly post-refactor (screenshot + no exceptions via the UI test server); the double-click detach/redock/zoom gestures themselves needed the user's own hands, since the automated harness can't synthesize real multi-click mouse input - confirmed working, including the `DataContext` fix.

#117 Machinist Vise: corners 1/3 gain a real left-edge X-face probe, measured origin + skew, size_y bug fix

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	184	23

Follow-on to the Machinist Vise Measure work (#105/#113): corners 1 and 3 sit on the jaw-covered edge, so they only ever got a Z-only top probe, dropped from size/origin/skew entirely. Live HW testing this round found they can do more, and turned up two real bugs along the way.

- **Corner 1/3 X-face probe.** The fixed jaw's own body only blocks the Y face at these corners (it sits at the BACK, at/near the origin's Y) - it never blocks an X approach at either corner. Each now backs off 15mm outward to open air, drops to the material midpoint (this corner's own just-probed top minus half the entered thickness, same reasoning as pcorner.macro's start_z), and seeks back in to find the true left edge, radius-compensated. First attempt probed straight into the jaw at the true corner Y - fixed by running the X-face probe at the SAME 5mm-inset Y the Z probe already uses to clear it.
- **Measured origin.** Corner 3 is the jaw origin corner, so its own probed X/Z now set the WCS origin directly (G10 X/Z), replacing the fixed fixture-saved X and the footprint-centre Z probe - a real measurement instead of an assumption, when Measure is on.
- **Left-edge skew.** Corner 1 vs. corner 3's probed X, over the entered (exact) height as the trusted Y separation, gives a real squareness check for the vise - something Corner Fence's own skew math couldn't do here (it needs a full 4-corner XY quad the vise never has).
- **size_y bug fix.** The existing corner 2/4 width/height calc averaged (origin.Y - corner2.Y) with (origin.Y - corner4.Y) for height - but corner 4 shares the origin's own Y (it's only the X-neighbour), contributing ~0 to that average and silently halving size_y. Caught on a 12"×3" stock reading back 3"×1.49". Y now comes from corner 2 alone; X still correctly averages 2/4 (both differ from the origin by the true width).
- **Schematic Z-label bug fix.** The existing per-corner Z/angle label loop needs both a full 4-corner XY quad and a spoilboard reference (only ever printed by pcorner.macro's DISCOVER pass) - the vise has neither, so its probed corners never showed a Z label at all. Added a vise-specific label path showing each probed corner's Z relative to the lowest one (a flatness map), independent of those two gates.

Hardware-verified this round: the size_y fix, schematic Z labels, and the corner 1/3 X-face probe (after the Y-inset fix) all confirmed on a real run. Builds clean Debug.

#118 Machine Setup > Machine tab: grblHAL version display + one-click firmware update

File	+	-
CNC Core/CNC Core/Grbl.cs	29	0
CNC Controls/CNC Controls/FirmwareUpdateManager.cs	238	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml	14	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	195	0
CNC Controls/CNC Controls/CNC Controls.csproj	1	0
ioSender XL/ioSender XL/ioSender XL.csproj	9	0
Locale/*/csv (7 locales)	21	0
tools/teensy_loader_cli/* (vendored PJRC source + build.ps1)	1277	0
firmware-tools/* (bundled teensy_loader_cli.exe + README)	14	0

The Machine Setup > Machine tab now detects a connected grblHAL controller and shows its firmware, version, build, and (for the SRW fork's own CI builds) the exact driver commit it was built from - parsed from a new [BUILD: ...] line already emitted by `report.c` on this fork.

- **Version display** - `GrblInfo.BuildStamp/DriverRef/DriverSha` (`Grbl.cs`) parse the driver's own build-provenance stamp out of `$I`; the Machine tab renders firmware/version/build plus the driver ref, and self-heals if the active connection changes (e.g. simulator to real board) while the tab stays open.
- **Check for firmware update** - queries a new `fw-latest` GitHub Release on `stevenrwood/iMXRT1062` (published by an addition to `firmware.yml`'s CI, mirroring the Simulator's existing public-release pattern) and compares its driver commit against the connected board's.
- **Update firmware** - when a newer build is found, downloads its `.hex` and flashes it via a newly bundled `teensy_loader_cli.exe` (built from PJRC's open-source loader, vendored + a small build script under `tools/teensy_loader_cli/`, shipped in `firmware-tools/`). `ioSender` disconnects first; because Windows builds of `teensy_loader_cli` have no automatic reboot-into-bootloader path, the confirmation prompt tells the user to press the board's physical RESET/PROGRAM button once it says it's waiting.

HW-verified end-to-end on a real Teensy 4.1 board over its network connection: detected the running build, found and downloaded a newer `fw-latest` release, flashed successfully after a manual reset-button press, and reconnected showing the new build stamp.

#119 Zero-friction installer — one-line install/update, rolling release CI

File	+	-
.github/workflows/release.yml	53	0
install.ps1	97	0
ioSender XL/ioSender XL/BuildInfo.cs	10	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	40	36
ioSender XL/ioSender XL/ioSender XL.csproj	1	0
readme.md	8	1

A new user previously had to clone the repo and build it in Visual Studio just to try ioSender. Now: open PowerShell, run `irm`

`https://raw.githubusercontent.com/ioSenderV2/ioSender/master/install.ps1 | iex`, done — downloaded, installed, shortcut on the desktop, launched.

- **Rolling release CI** — `.github/workflows/release.yml` builds the Release config on every push to `master` and republishes a single rolling latest GitHub Release (zipped `bin\Release`), so there's no version-tag ceremony to keep the installer fed.
- **install.ps1** — installs per-user to `%LocalAppData%\Programs\ioSender` (no admin rights, no UAC prompt), creates the desktop shortcut, launches. Re-running it is the update path: the current install is moved to `ioSender\previous` first, so `-Rollback` can swap back to the prior build if a new one misbehaves — one level deep, not a full history.
- **Fixed Check for Updates** — the existing Help → Support → Check for updates feature compared semver against the rolling release's tag, which is literally the string `latest`; parsed as a version it silently degraded to `0.0.0` and would always have claimed “up to date” even when stale. Replaced with a commit-SHA compare: `BuildInfo.cs` (new, stamped by the release workflow's build step) holds the commit the running binary was built from, matched against a `build:master@<sha>` marker in the release body — the same convention `FirmwareUpdateManager` already uses for firmware's `drv:<ref>@<sha>`. A local dev build (no embedded commit) short-circuits with a message pointing at `install.ps1` instead of comparing against GitHub.

Builds clean in Release. First rolling release published and round-trip verified: CI 403'd on its first run (the `ioSenderV2` org locks default Actions workflow permissions to read-only and changing it needs org-admin, unavailable here) — fixed by routing the release step through a PAT stored as the `RELEASE_TOKEN` repo secret instead. Installed via the one-liner and confirmed Check for Updates correctly reports the CI build's commit as current.

#120 One-click Update Now + Support > Roll back to previous version

File	+	-
Locale/*/csv (7 locales)	14	0
ioSender XL/ioSender XL/MainWindow.xaml	1	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	39	3

Follow-up to [#119](#): Check for Updates found a newer build but could only open the GitHub releases page, leaving the user to figure out there's no install button there and re-run `install.ps1` by hand.

- **Update now** — the “A newer build is available” prompt now asks “Update now?”. Yes fetches `install.ps1` fresh from GitHub (not a possibly-stale local copy) into a detached, visible PowerShell process and closes ioSender so the file swap can happen; `install.ps1` downloads, installs and relaunches as usual.
- **Help > Support > Roll back to previous version...** — same mechanism with `install.ps1` – Rollback, reusing that one engine instead of re-implementing the `ioSender\previous` folder swap in C#. Only goes back one version, matching `-Rollback`'s own limit.

Builds clean in Release. New menu item's 2 strings backfilled to all 7 locale CSVs via `tools/locadd.py`. Round-trip verified: installed the prior build, confirmed Check for Updates now offers Update now, and confirmed the composed PowerShell command parses clean.

#121 Jog buttons could send an overlapping unacknowledged \$J, wedging the controller

File	+	-
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	44	0

Confirmed on real hardware via console log: a fast burst of jog-button clicks fired a new \$J= command before the controller had acknowledged (ok'd) the previous one. grblHAL then stopped responding to *anything* - not just jog commands, but plain status queries too - with no error reported, until the controller was power-cycled.

- **Jog-ack gate** - JogCommand() now tracks whether a previously-sent \$J is still outstanding and refuses to send another until it's acknowledged, dropping the extra click rather than risking an overlap.
- **Safety timeout** - the gate auto-clears after 2 seconds even without an ok, so a single dropped response (unrelated comms hiccup) can't permanently lock jogging out for the rest of the session.
- **Cancel is exempt** - the jog-cancel realtime byte always goes through immediately and clears the gate, since it's not a queued \$J line.

This doesn't fix the underlying firmware behavior (grblHAL arguably shouldn't be able to wedge on overlapping jog commands at all), it stops ioSender's own jog buttons from being able to trigger it. Hardware-verified: the same rapid-click pattern that previously wedged the controller now sends cleanly, each \$J waiting for its own ok.

#122 Fusion batch post failed on operations using Air/Mist coolant

File	+	-
Fusion Addin/ioSenderBatchPost/ioSenderBatchPost.py	35	0

cam.postProcess raised 3 : Unsupported 'air' coolant on every operation using Fusion's Air or Mist coolant setting - grbl.cps only understands Flood and disabled. `_force_flood_coolant()` reads each operation's coolant parameter and force-remaps Air/Mist to Flood before posting, logged per-op to `_batchpost.log` when it fires. Default behavior, no opt-in checkbox.

#123 A zero-length/truncated ATC macro on the controller read as Installed

File	+	-
CNC Controls/CNC Controls/AtcMacros.cs	54	4

Found chasing a hardware bug where a Start Job's tool-length reference (M6 T8) never actually probed the toolsetter puck: `tc.macro` on the controller had been truncated to 0 bytes by an earlier interrupted write, but the Machine Setup gate and Controller Macros tab both reported it **Installed** anyway - `GetStatus/EnsureProvisioned` only checked whether the file NAME was present in the listing, never its size, and the aggregate `atc.sum` checksum sidecar wasn't rewritten by the corruption either.

- **Zero-length = Missing** - so the Machine Setup gate still fires and routes to the Controller Macros step, same as a genuinely absent file.
- **Any other size mismatch against the embedded copy = Outdated** - a cheap, no-extra-round-trip signal (the file listing already includes size) that catches partial truncation too, not just total.
- **EnsureProvisioned** (the self-healing re-upload path) gets the same checks, so it can actually catch and fix the exact failure it exists to catch.

#124 Vise Set position could close mid-probe and silently keep the stale corner

File	+	-
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	8	2
CNC Controls/CNC Controls/MachineSetupWizard.xaml	0	2
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	1	23

Chased a hardware report of "Set position didn't move anything" that turned out to be two separate bugs:

- **OK-button race** - the vise corner probe (`pvisecorner.macro`) streams asynchronously, so `btnOk` (`IsDefault="True"`, fires on Enter too) being clickable mid-probe let the dialog close and copy the CLONE's still-stale `Coords` back to the real fixture before the probe's own result was ever written - the fresh corner was silently lost. `SetBusy()` now disables OK for the same window it already disabled Set position.
- **Bogus quick-access button** - the Fixtures-tab list's own "Set position" button just captured the raw jogged position for every fixture kind, which is correct for corner-probing kinds but silently wrong for a Machinist Vise (no vise-empty confirmation, no `pvisecorner.macro` call at all). Removed; the Add/Edit dialog's Set position (which branches correctly per fixture kind) is now the only path.

#125 Start Job/Load Stock accuracy pass: jaw-origin schematic, safer corner travel, exact-size tight probing

File	+	-
CNC Controls/CNC Controls/StartJobConfig.cs	10	0
ioSender XL/ioSender XL/StartJobView.xaml	9	0
ioSender XL/ioSender XL/StartJobView.xaml.cs	208	37
macros/pcorner.macro	33	16
Locale/*/csv (7 locales)	49	0

A cluster of related fixes and one opt-in feature, developed and hardware-verified together against a real Corner Fence Measure run:

- **Jaw-origin schematic labels** - each vise corner's + the centre-footprint probe's Z label on the Start Job schematic now reads as height above the fixture's true bare-jaw-top (backing the Set-position park margin out of the stored fixture Z), directly comparable to the descent math Start Job prints during a run - previously it read relative to the lowest probed corner (a flatness-only number, unrelated to the jaw).
- **No more silent STOCK overwrite** - Start Job used to overwrite the entered Width/Height/Thickness from a loaded program's (STOCK ...) comment on every tab activation, even if the operator had already set them for a different job that happened to still be loaded. It now detects a mismatch (0.05mm tolerance) and reveals a "Copy from loaded program's STOCK" button instead of applying anything automatically.
- **Safer, faster corner-to-corner travel** - Corner Fence's corners 2-4 now travel at corner 1's own measured stock top plus an operator-set "Corner travel margin (Z)" field (new, persisted), instead of always retracting fully to machine Z0 or using a generic floor+30 estimate before each corner's own top probe - reusing the #<_ls_maxz> mechanism the vise path already had. The optional TLO-reference step's G30 detour gets its own explicit full retract, decoupled from that trusted height so it doesn't also starve the corner that follows it.
- **pcorner.macro sign bug fix** - its #<_ls_maxz> "is this set" check used GT 0, but maxz is a machine Z coordinate and every legitimate value is negative on a machine homing Z to the top - the check silently failed for every real maxz ever passed (both Corner Fence's and the vise's own), always falling back to the slower/more conservative path with no error. Fixed to NE 0.
- **New opt-in "Stock size is exact" mode** - when the entered size is trusted exact rather than a padded estimate, corners (including a tight re-probe of corner 1 itself, using its own first-pass result as reference) probe within a small, hand-tuned distance of their computed true position instead of a generous safety margin. Off by default; unchecked behavior is unchanged.
- **Tidier face-probe repositioning** - pcorner.macro's X/Y-face retreats now prefer the caller's trusted safe height over recomputing one per corner, and the Y-face probe moves diagonally straight to its start position instead of routing back through the top-probe's own XY (over the stock) first.

Hardware-verified end-to-end: all 4 corners of a Corner Fence Measure run, exact-size mode enabled.

#126 Surface the firmware hang-watchdog restart notice + firmware-change detection on reconnect

File	+	-
CNC Core/CNC Core/Grbl.cs	38	0
CNC Controls/CNC Controls/AppConfig.cs	15	0
ioSender XL/ioSender XL/HangWatchdogReporter.cs	129	0
ioSender XL/ioSender XL/CrashReporter.cs	1	0
ioSender XL/ioSender XL/App.xaml.cs	6	0
ioSender XL/ioSender XL/JobView.xaml.cs	7	4
ioSender XL/ioSender XL/ioSender XL.csproj	1	0

The iMXRT1062 driver grew a hardware hang watchdog (WDOG1) this session: a stuck g-code/\$-command dispatch (main loop never returns to feed it) now resets the board instead of staying wedged, and the line it was stuck on is retained across the reset and reported via \$I/\$I+ as [MSG:Restart after controller hang processing: <line>] - see the firmware repos' own history for that half.

- **Console surfacing on reconnect.** GrblInfo.Get() (already queried automatically on every connect) now forwards any [MSG: ...] line straight to the console, bypassing the Silent flag that normally suppresses connect-time chatter - the restart notice (and any other controller message) shows up without a manual \$I.
- **Reconnect no longer waits for Alarm to clear.** JobView.OnReconnectInit() used to skip the \$I/handshake re-query entirely while the controller was in Alarm (common right after any reset - homing required) and defer it until a later unlock. \$I is explicitly Alarm-safe on the firmware side, so this ran immediately instead - the exact case this feature needs to catch.
- **Firmware-change detection.** The connected firmware's build identity is compared against the one seen on the previous connection (persisted in AppConfig); a change logs [MSG:Firmware changed since last connection - was: X, now: Y].
- **Report-it dialog.** New HangWatchdogReporter.cs, modeled on the existing crash-reporter pattern (no backend, no auto-send) - pops up when the restart notice is detected, showing the stuck line and a button that opens a pre-filled GitHub issue against the firmware repo.
- Both the new dialog and the existing crash-reporter dialog now call DialogScaling.Apply(), which they'd been missing - they were rendering at 100% regardless of the configured UiScale zoom.

Firmware-side half (WDOG1 arm/feed, retained-line record, \$HANG test command) lives in the core/iMXRT1062 driver repos, not this repo. Builds clean.

#127 AppMessageBox: message boxes now scale with the app's UiScale zoom

File	+	-
CNC Controls/CNC Controls/AppMessageBox.xaml	22	0
CNC Controls/CNC Controls/AppMessageBox.xaml.cs	131	0
CNC Core/CNC Core/AppDialogs.cs	13	2
ioSender XL/ioSender XL/App.xaml.cs	1	0
docs/playbooks/drive_ui_test_server.md (new)	156	0

The native `System.Windows.MessageBox` is an OS dialog outside the WPF visual tree, so unlike every other `ioSender` dialog it never picked up the app's `UiScale` zoom (`Ctrl+Alt+Plus/Minus`) - on a high-DPI laptop it stayed small and hard to read while the rest of the app scaled with it.

- **New `CNC.Controls.AppMessageBox`** - a WPF window mirroring `MessageBox.Show`'s API (message/caption/buttons/icon/default result), scaled the same way every other dialog is (`DialogScaling.Apply`), so it grows with the rest of the UI instead of staying fixed size.
- **Drop-in for existing call sites** - `AppDialogs.Show` (the app's one message-box funnel, ~146 call sites) now prefers a registered `CustomMessageBox` delegate over the native `MessageBox.Show` for the real-user fallback path; `AppMessageBox.Register()` wires it in once at startup. No call site changed.
- **New playbook** - `docs/playbooks/drive_ui_test_server.md` documents launching `ioSender` under `-testserver` and driving/verifying controls by `x:Uid` over HTTP, plus the gotchas hit building a standalone in-process render harness to verify this feature's scaling (stale satellite resource DLL, missing `app.config`, dispatcher shutdown mode, layout-settling races).

Verified via an in-process `RenderTargetBitmap` capture harness at 1.0x/1.8x/2.5x `UiScale` (icon, text, and buttons all scale together, full text visible with no clipping) - caught and fixed a real bug along the way, a stray `Window MaxWidth` that clipped scaled-up content instead of letting it grow.

#128 Analog joystick jog was jerky under continuous hold - moved off the UI thread

File	+	-
CNC Core/CNC Core/ControllerMapper.cs	52	13

Keyboard's continuous jog sends one \$J command with an effectively-infinite distance and lets grblHAL run it until jog-cancel on key-up, so it's smooth by construction. Analog stick jogging instead re-sent a short \$J segment roughly 15x/sec, relying on each new segment landing before the previous one finished so grblHAL could blend them into continuous motion - and that resend loop ran on `ControllerService`'s UI-thread `DispatcherTimer`. Any UI-thread hitch (layout, rendering, other UI-bound work) could delay a tick past that window: the current segment ran dry, motion decelerated to a stop, and the next segment's arrival read as a jerk. Same bug class as the job-streaming stutter fixed earlier via the background `StreamPump`.

- **Background analog-jog thread.** The stick/trigger poll-and-send loop now runs on its own dedicated background thread with a precise sleep-based cadence, independent of the WPF dispatcher.
- **Direct low-level writes.** Jog commands are written straight to `Comms.com.WriteCommand` - the same path keyboard jogging already uses - instead of `GrblViewModel.ExecuteCommand`, which touches UI-bound `ObservableCollections` and isn't safe to call off the UI thread.
- **Button mapping unaffected.** Discrete button-press actions (step jog, cycle start, home, etc.) stay on the UI thread as before - only the continuously-resent analog stream needed to move.

Hardware-verified: user reported motion "smooth as silk" holding the stick over a real connection, versus visibly jerky before.

#129 Tooltips now scale with the app's UiScale zoom

File	+	-
ioSender XL/ioSender XL/App.xaml	15	1

ToolTips render in their own Popup, outside MainWindow's `LayoutTransform`-scaled visual tree - the same gotcha `DialogScaling.cs` (#127) already documents for dialog windows. Without accounting for it, tooltip text stayed fixed at 1x regardless of the app's `UiScale` zoom (`Ctrl+Alt+Plus/Minus`) - readable at the default size but nearly illegible once the rest of the UI was zoomed up.

- **App-wide implicit ToolTip style** (`App.xaml`) - a `LayoutTransform` bound to `Base.UiScale`, the same scaling pattern `MainWindow` uses for its own content and `DialogScaling` uses for other top-level windows. No `x:Key`, so it applies automatically to every tooltip app-wide, including the common `ToolTip=" ... "` string shorthand - no per-control changes needed anywhere.

Verified by hand: hover tooltip text now grows in step with `Ctrl+Alt+Plus` zoom.

#130 New `-simulator` command-line flag to auto-connect to the bundled simulator on startup

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	33	1

Serial and network already had a scriptable startup path via the existing `-port/-baud` flags (e.g. `-port COM3 -baud 115200, -port 192.168.1.50:23`) - both wired straight into the same startup connect path the Connect dialog uses, bypassing it entirely. The bundled simulator had no equivalent: a raw `-port 127.0.0.1:23` would only work if the simulator process happened to already be running, since launching it first requires setting `Base.StartSimulator` and the simulator `exe/args` - fields only the Connect dialog's Simulator tab populated.

- **New `-simulator` flag** - rewrites the startup target to `127.0.0.1:<port>` and marks it as a simulator connection (the same fields the Connect dialog's Simulator tab sets), so the existing `EnsureSimulatorRunning` launches the bundled sim before connecting, exactly mirroring a manual Simulator-tab connect. Reuses the last simulator port if the saved target was itself already a simulator connection, otherwise defaults to 23 (the Connect dialog's own default).
- **Graceful no-op if nothing's built yet** - shows a message and falls through to the normal startup path instead of trying to connect to a nonexistent exe, if nothing has been built to `%AppData%\Simulator` yet (same precondition the Connect dialog's Simulator tab already enforces).

Verified end-to-end: `build.ps1 -Launch -simulator` launched the bundled simulator and connected automatically with no dialog, confirmed via the console log's boot banner + handshake.

#131 Parallel agent-driven UI testing: -testserver launches no longer single-instance, -simulator takes a port

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	20	5
ioSender XL/ioSender XL/App.xaml.cs	7	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	10	3

Agent Cockpit-style parallel UI testing (several automated sessions each driving their own ioSender instance via the WpfUITestServer) hit two collisions:

- **Hard single-instance lock** - PipeServer.cs's fixed named pipe ("ioSender") meant a second launch always forwarded its args into the first and exited immediately, and the first instance's window got forcibly foregrounded via ActivateRequested/BringToFront - stealing focus from whatever the operator was doing. Skipped both sides (the check in App.xaml.cs, becoming a pipe listener in MainWindow.xaml.cs) whenever -testserver is active - an automation-driven instance was never meant to be a singleton. A normal interactive launch is untouched; a -testserver instance now coexists with a real instance, or with other -testserver instances, without colliding or force-activating anything.
- **-simulator now takes an optional explicit port** (-simulator 8901) that drives both the bundled simulator's own -p launch argument and the TCP address ioSender connects to - the same simPort variable already did double duty here, just newly exposed on the command line. Bare -simulator is unchanged (reuses the last saved simulator port, else defaults to 23), so two parallel test agents can each point at their own simulator instance instead of colliding on one port.

Self-verified end-to-end: built Debug, launched a normal instance (A) then a -testserver=18762 instance (B) - both stayed alive simultaneously (previously B would have forwarded into A and exited), A was never force-activated (foreground window confirmed via GetForegroundWindow before/after), and B's own test server answered independently on its port. Known separate, still-open issue: a fresh launch with no other instance running can still take initial OS foreground focus on its own (confirmed in the same test) - a window-creation behavior, not a single-instance collision, and not addressed by this fix.

#132 -testserver launches never steal OS foreground focus, screenshots stay intact

File	+	-
ioSender XL/ioSender XL/App.xaml.cs	7	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	64	3

Even with the single-instance collision fixed ([#131](#)), a fresh `-testserver` launch with nothing else running still grabbed OS foreground focus purely from becoming visible - confirmed via `GetForegroundWindow` before/after, independent of `Activate()`/`ShowInTaskbar`/window position.

- **WS_EX_NOACTIVATE, applied at the raw window-handle level** as soon as the HWND exists (`SourceInitialized`), gated on `-testserver` - a documented, first-party Win32 extended window style that makes the window permanently non-activatable at the OS level, regardless of any later `Show()`/`Opacity` transition.
- **Screenshots stay fully intact** - the first attempt (leaving the window at `Opacity=0` forever instead) did stop the focus steal, but broke `WpfUITestServer`'s `/screenshot`: it renders the window via `RenderTargetBitmap` (an in-memory Visual render, not a screen grab), which honours the Window's own `Opacity`, so every whole-window screenshot came back blank - unacceptable, since screenshots are the essential tool for automated visual verification. `RevealMainWindow` now always sets `Opacity=1` again; the window is parked off-screen (`Left/Top = -32000`) and out of the taskbar purely for tidiness, with `WS_EX_NOACTIVATE` doing the actual focus protection.

Hit two real P/Invoke bugs along the way, both confirmed via the crash log's `EntryPointNotFoundException` rather than guessed: `GetWindowLongPtr/SetWindowLongPtr` are C preprocessor macros, not real DLL exports, and this build actually runs 32-bit (confirmed via `IsWow64Process`, despite `AnyCPU`) where `GetWindowLongPtrW` doesn't exist at all - only `GetWindowLongW` does. Used the standard `IntPtr.Size`-dispatched 32/64-bit pattern. Self-verified end-to-end multiple times: foreground window confirmed unchanged across a fresh launch with nothing else running, `WS_EX_NOACTIVATE` confirmed actually set on the live window handle, full UIAutomation tree functional (204 elements), and `/screenshot` returns a complete, correctly-rendered ~600KB PNG of the live UI - not the blank 35KB frame from the `Opacity=0` attempt.

#133 Medium-priority tooltips: spindle, goto/outline, macro dialogs, network connection settings

File	+	-
CNC Controls/CNC Controls/SpindleControl.xaml	3	3
CNC Controls/CNC Controls/GotoBaseControl.xaml	3	3
CNC Controls/CNC Controls/OutlineBaseControl.xaml	1	1
CNC Controls/CNC Controls/MacroManagerDialog.xaml	2	2
CNC Controls/CNC Controls/MacroEditor.xaml	3	3
CNC Controls/CNC Controls/PortDialog.xaml	5	4
Locale/*/csv (7 locales)	160	0

Fills in the next tier of secondary controls left without hover guidance: the spindle direction radio buttons, the Goto/Outline action buttons, the Macro Manager/Macro Editor dialogs, and PortDialog's network tab (WebSocket, port, host, Scan network) - the last of these connection-critical settings had no guidance at all.

- **SpindleControl, GotoBaseControl, OutlineBaseControl, MacroManagerDialog, MacroEditor** - added `ToolTip` to each control listed above; none of these five files had ever been registered with `tools/locadd.py`, so they were also missing rows for their *existing* ToolTips (e.g. Macro Manager's View/Edit/Prompt/Key column tooltips) - backfilled along with the new ones.
- **PortDialog.xaml** - added a `x:Uid` to the network-port `NumericTextBox` (previously un-addressable) and tooltips to the WebSocket checkbox, port field, host combo, and Scan network button.

Verified: Debug build clean; test-server run confirmed all Goto/Outline/Spindle controls realize on the main window, and the PortDialog Network tab (WebSocket/Port/IP address/Scan network) renders correctly via `/screenshot/dlg_connection`. `tools/locadd.py` backfilled 160 rows across all 7 locale CSVs and is idempotent on a second run.

#134 Dry run mode: sender-side spindle/coolant-off run, and the MDI path is now typed-text only

File	+	-
CNC Core/CNC Core/GrblViewModel.cs	7	112
CNC Controls/CNC Controls/JobControl.xaml.cs	96	1
CNC Controls/CNC Controls/JobControl.xaml	9	0
CNC Controls/CNC Controls/StreamPump.cs	12	0
CNC Controls/CNC Controls/GCode.cs	13	0
CNC Core/CNC Core/GCodeJob.cs	39	7
CNC Controls/CNC Controls/MacroProcessor.cs	65	77
ioSender XL/ioSender XL/MainWindow.xaml.cs	15	7
CNC Controls Probing/CNC Controls Probing/ProbingView.xaml.cs	2	1
CNC Controls Probing/CNC Controls Probing/Program.cs	2	1
ioSender XL/ioSender XL/StartJobView.xaml.cs	1	1
Locale/*/csv (7 locales)	21	0

A dry run offsets Z clear of stock and forces the spindle/coolant off for the whole run, regardless of what the loaded program contains, so a toolpath can be watched without cutting or spinning anything. Built directly in response to a real incident: an incomplete, uncommitted "dry run" implementation offset Z but never suppressed spindle/coolant commands, so a loaded program's own M3 turned the spindle on at 10,000 RPM with a 3D probe installed, tearing the USB cable out of its connector.

- **Per-block spindle/coolant detection** (`GCodeBlock.HasSpindleOrCoolantOn`) computed once at load time from the real G-code parser, consumed by both streaming paths (`StreamPump/legacy SendNextLine`) to neutralise M3/M4/M7/M8 as they're sent; M5/M9 are also queued as a defensive preamble in case the spindle/coolant was already on.
- **Auto-clears** when a run ends or aborts, or a different program loads - and is now correctly scoped to the loaded job only, never a macro/tool-generated run streamed via `RunStreamedJobInPlace` (`GCode.IsTransient`), which was leaking the Z offset into unrelated macro runs.
- **Refused outright** (not silently skipped) for SD-card jobs and generator/wizard runs where the sender can't filter individual commands, rather than running them unprotected.
- **The MDI bypass is gone:** every macro/wizard/probing call used to fall back to `GrblViewModel.ExecuteMacro` (an unprotected, non-flow-controlled send) for content that merely looked "small" or non-motion. `MacroProcessor.Flush` now always routes through the flow-controlled job streamer, so dry-run's filtering (and Feed Hold/Stop) can't be bypassed by a burst that happens to look too small to matter - MDI is reserved exclusively for text the operator actually typed into the MDI box.

Two follow-on bugs surfaced by that transition, both fixed: a stray line-number prefix on a bare `#<name>=value` line broke the controller's parameter-assignment routing (`GCodeJob` now exempts those lines from numbering, same as O-word lines); and an intermediate macro burst could race a later one for a shared streaming hand-off (`RunStreamedJobInPlace` only kicks off a burst asynchronously, sharing one `RunControl.Source` field) - intermediate flushes now block until their burst genuinely finishes before the next one starts.

#135 Consolidated log file creation/rotation/retention into one shared LogFile primitive

File	+	-
CNC Core/CNC Core/LogFile.cs	141	0
CNC Core/CNC Core/ConsoleLog.cs	13	53
CNC Core/CNC Core/DebugLog.cs	10	36
ioSender XL/ioSender XL/App.xaml.cs	6	8
CNC Core/CNC Core/CNC Core.csproj	1	0

Housekeeping found while chasing an unrelated bug: three separate log writers (`console_<timestamp>.log`, `ioSender.debug.log`, `ioSender.crash.log`) each hand-rolled the same 8MB-to-".1" rotation logic, and only the console log had any age-based pruning.

- **CNC.Core.LogFile** - one shared primitive: logs-directory resolution (with the app-folder fallback everyone needed), size-based rotation, and - only for a fresh-file-per-run log - per-run timestamped naming, age-based pruning, and a "latest" alias. `ConsoleLog/DebugLog/the crash logger` now all call into it instead of three copies of the same code.
- **ioSender.crash.log had no size cap at all** - unbounded growth over the life of an install - and now gets the same rotation as the others.
- **latest_console.log** - an NTFS hard link (not a symlink, so no elevation/Developer Mode needed) to the current run's console log, updating live since it's the same underlying file, so it never has to be hunted down by timestamp.

#136 pcorner/pvisecorner: spoilboard probe was searching from the wrong Z

File	+	-
macros/pcorner.macro	9	2
macros/pvisecorner.macro	6	1

Both macros clear G54 (G10 L2 P1 X0 Y0 Z0) so their "absolute" Z moves act as machine coordinates - but grblHAL's WCO is G5x offset + G92 offset + tool length offset (`gc_get_offset`, `gcode.c`), and G10 L2 P1 only zeros the first term. A real Start Job run left a non-zero G92 offset active (confirmed via `$G` and grblHAL's own `is_g92_active()` in `report.c`), which the macros never cancelled - so a machine-Z reference like the fixture's saved spoilboard position got driven as if it were a work-Z offset, landing the search roughly the G92 offset's own magnitude away from the real surface, well outside its 12mm travel cap.

- **G92.1 added** alongside the existing G10 L2 P1 in both macros, so they're robust to whatever modal state preceded them - matching what their own "run in machine coordinates" comment already claimed to guarantee. **G49** also added defensively (tool length offset was already clean in this repro, but WCO includes it too).

Confirmed fixed on real hardware after re-uploading both macros.

#137 Start Job: corner-2 travel height after TLO ref, unit-toggle readout, dialog scaling

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	15	3
CNC Controls/CNC Controls/MacroProcessor.cs	2	0

Three small issues found testing the pcorner G92 fix above:

- **Corner-2 travel height** - after setting the TLO reference the machine parks at G30 and explicitly retracts to Z0, but pcorner.macro's own internal logic then drops straight to the trusted "Safe Z" height *before* traveling XY to corner 2 - undoing that retract and crossing the unverified G30-to-fixture territory at a lower height than intended. Now crosses to corner 2's approach XY while still at Z0, scoped to just this TLO-ref detour (normal corner-to-corner travel elsewhere is already validated safe at Safe Z height).
- **Zstock label always in mm** - the schematic's per-corner t= label formatted the raw mm value directly instead of the same unit-aware `FormatLen` helper the bottom-left readout uses; the in/mm toggle also relabelled the input fields and redrew the schematic but never re-ran that readout, leaving it stale.
- **Dialog scaling** - the modeless "install probe" MBOX prompt and the PROMPT-directive input dialog (`MacroProcessor.ShowHoldPrompt/ShowPromptDialog`) built their own raw `Window` and never called `DialogScaling.Apply` like every other dialog in the app, so - unlike the "Run macro?" confirm shown right before them - they didn't pick up the `UiScale` zoom.

#138 Dry run skips the program's own tool changes instead of running them

File	+	-
CNC Controls/CNC Controls/JobControl.xaml	8	4
CNC Controls/CNC Controls/JobControl.xaml.cs	8	0
CNC Controls/CNC Controls/StreamPump.cs	13	0
CNC Core/CNC Core/GCodeJob.cs	22	2
Locale/*/csv (7 locales)	7	7

There's no safe way to suspend/restore a mid-stream G92 around a tool change - G-code is locked out during the Tool state a change parks in. Simpler and more robust: dry run never cuts, so which tool is actually in the spindle doesn't matter.

- **GCodeBlock.HasToolChange** (detected from the real parser's M6 tokens, same pattern as the existing spindle/coolant suppression) - M6 lines are now neutralised the same way M3/M4/M7/M8 already are, so the program's own tool changes never run during a dry run at all. The program just runs straight through without pausing for a swap.

#139 pcorner.macro: touch-plate DISCOVER now rises to Z0 first; corner 2's approach height fixed

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	15	14
macros/pcorner.macro	35	3

Two related corner-travel issues found testing the pcorner G92 fix from the previous entry:

- **Touch-plate DISCOVER rise to Z0** - the Z0-rise-before-travel was written inside the same conditional block as the 3D-probe-only spoilboard search, so touch plate mode (which skips that block - a continuity probe can't detect a non-conductive spoilboard) silently skipped the rise too, going straight from wherever the caller left the machine to an ESTIMATED safe height with no verified-clear waypoint first. Split into its own unconditional, mode-independent step.
- **Corner 2's approach height** - reached via the TLO-reference detour (parks at G30, an arbitrary point not verified clear of any fence/clamp hardware), used to get a bespoke extra waypoint that made its structure diverge from every other corner. Replaced with pcorner.macro's new # <_ls_appz>: an optional override for ONLY that corner's first height decision (Z0 instead of the footprint-scoped #<_ls_maxz>), leaving every later height in that same call on the trusted value, same as every other corner. Sentinel is 9999, not 0 - Z0 is itself a legitimate override value here.

#140 Start Job: exact-size labels/hint follow the checkbox, touch-plate corners show a real Z reading

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	29	4

Two small polish items:

- **Exact-size labels** - checking "Stock size is exact" now switches the Width/Height/Thickness field labels to plain "Width (X):"/etc. and updates the hint text, matching the vise fixture's always-exact treatment, instead of staying on "Est. ..." regardless.
- **Touch-plate corner readout** - the schematic's per-corner thickness label ("t=...") only ever had a value in 3D-probe mode, since touch plate has no spoilboard reference to subtract (continuity probing can't detect a non-conductive spoilboard) - the value was silently omitted every time. Touch plate corners now show "z=<measured top>" instead: a genuine reading (useful for spotting unevenness across corners), not mislabelled as a thickness the mode can't measure.

#141 Dry run's Z clearance was computed wrong - two separate real bugs, both found on real hardware

File	+	-
CNC Controls/CNC Controls/JobControl.xaml.cs	30	2
CNC Core/CNC Core/GCodeJob.cs	26	16

Two independent bugs, both surfaced chasing the same symptom (dry run's Z clearance reading wildly different from the intended 10mm + stock thickness) on real hardware, with the operator's own live measurements pinning down the exact arithmetic.

- **G92 is relative to current position, not absolute.** G92 Zk makes WHEREVER THE MACHINE CURRENTLY IS read as work-Z=k - it has no notion of "the stock" at all. The previous code sent a fixed G92Z-<offset> from wherever Cycle Start happened to be pressed (typically wherever the last job/macro parked, e.g. Start Job's G30 - nowhere near the stock), so the resulting clearance was "however far the machine already was from the stock" plus the intended offset, not the offset alone. Now computes the actual G92 value needed to put work-zero exactly offset mm above the TRUE stock top, using the machine's live current position and the live (pre-offset) work-coordinate-offset: $k = \text{MachinePosition.Z} - (\text{WorkPositionOffset.Z} + \text{offset})$.
- **Token-accumulation over-suppression, found along the way.** GCodeBlock.HasSpindleOrCoolantOn/HasToolChange scanned Parser.Tokens - a CUMULATIVE, whole-file list (cleared only once per file load, not per line; several other features - the 3D carve view, rotate/wrap, etc. - all rely on it staying that way) - so once the first M3/M4/M6/M7/M8 appeared anywhere in a file, every line after it was flagged too, silently turning the entire rest of the program into no-op comments during a dry run. Confirmed on real hardware: hundreds of instant acks, zero motion, ending in a Hold then a reset. Both helpers now only scan the token slice added by that specific line's own parse call.

Confirmed fixed on real hardware after both fixes landed - dry run's Z clearance now matches the intended offset regardless of where the machine starts.

#142 OBS/Tapo camera recording control, independent of OBS's main Record button

File	+	-
CNC Controls/CNC Controls/RtspCamerasControl.xaml.cs	247	0
CNC Controls/CNC Controls/RtspCamerasControl.xaml	15	0
CNC Controls/CNC Controls/ScenarioNameDialog.xaml.cs	61	0
CNC Controls/CNC Controls/ScenarioNameDialog.xaml	20	0
CNC Core/CNC Core/ObsBridge.cs	70	2
ioSender XL/ioSender XL/App.xaml	28	0
CNC Controls/CNC Controls/ActionKeyBinder.cs	8	0
CNC Controls/CNC Controls/MainPanelRegistry.cs	5	1
ioSender XL/ioSender XL/MainWindow.xaml	5	0
CNC Controls/CNC Controls/CNC Controls.csproj	14	0

New "OBS Control" panel (RtspCamerasControl) starts/stops recording on the 2 Tapo RTSP cameras (Front Left/Front Right) plus the app's own screen-capture source, independently of OBS's main Record button - via obs-websocket v5's `SetSourceFilterEnabled` against each camera's own Source Record filter instance (not `TriggerHotkeyByName`, whose hotkey names collide across filter instances).

- **Per-camera + "All" toggles** - red circle (idle) swaps to a red square (recording); a matching "All" toggle also lives on the main run bar next to Timelapse.
- **F7-F12 hotkeys** registered per camera/app via `ActionKeyBinder`, driving the same `ObsBridge` entry point as the panel buttons.
- **"All" stop** prompts for a take name and files the 3 resulting recordings into a named subfolder (matched by source name or camera label, since Source Record's actual output filename uses the label).

Gated behind `-demomarker` (same visibility rule as Timelapse) - a demo-shoot-only affordance, hidden in normal use. Built for filming ioSender manual videos.

#143 Fixture edit dialog: redesigned Corner Fence schematic + directly-editable X/Y/Z position

File	+	-
CNC Controls/CNC Controls/FixtureEditDialog.xaml	135	51
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	116	27
CNC Controls/CNC Controls/Fixture.cs	33	1
tools/render-harness/ (new)	114	0
docs/playbooks/drive_ui_test_server.md	37	15
Locale/*/csv (7 locales)	91	14

The dialog is restructured to match ProbeDefinitionEditDialog's pattern (fields on the left half, schematic on the right half). The Corner Fence schematic is now a real 3-zone diagram - red keep-clear fence rails, a green near-corner reference zone, a cream far zone - all sized off the active 3D probe's body diameter (radius = $D/2$), replacing the old single dashed clearance circle. (The real bug behind "the green area looks too small" turned out to be an SVG arc sweep-flag silently picking the wrong of the two circles through the given endpoints/radius - not a colour or semantics issue.)

- **Position row** is now Set/Test buttons + a checkmark (green once Test position succeeds) inline with the label, followed by **directly-editable X/Y/Z Axis fields** - an alternative to re-jogging for a small nudge or a known-good value.
- **Test position now rapids** (G53G0) through its retract/traverse/drop-to-target travel, like every other Goto button, instead of crawling at G1 F1000.
- Fixed a real hardware bug where Test position's completion callback could silently never fire (and the checkmark never turn green) if the app's StreamingState already happened to equal Send/SendMDI from unrelated prior activity - the completion watcher is now armed directly from the macro runner's own "did it start" signal instead of inferring it from a property-change event that could be silently suppressed. An Alarm mid-probe no longer leaks that watcher's subscription forever, either.
- Added a warning note across the dialog's bottom: the 3D probe must be installed before Set/Test, and the saved position must be within ~10 mm of the spoilboard.

`tools/render-harness/` (new, kept permanently): a standalone WPF tool that renders the real dialog class against the real on-disk AppConfig, for verifying modal dialogs the UI test server can't reach - built after two rounds of a hand-copied XAML mock silently drifting from what the real dialog actually rendered. Fully HW-verified end to end.

#144 Machine Setup tab could go permanently unresponsive after a mid-move tab switch

File	+	-
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	25	2

MachineSetupWizard.Activate(true) called RefreshMacroStatus() synchronously - but that queries the controller's filesystem listing via a call that pumps the WPF dispatcher, and tab activation runs from MainWindow's tab-switch handler *during* that switch's own layout pass. A pumped-dispatcher wait colliding with an active layout pass throws mid-switch, after the new tab was already marked current but before the switch actually finished - leaving the tab looking selected but frozen, permanently (a mid-layout-pass exception doesn't self-heal the visual tree). A second call site in the same file already deferred the identical call for this exact documented reason; this one just never got the same treatment.

Reproduced and root-caused via targeted diagnostic logging against a live G28+G30-then-click-Machine-Setup repro; fixed by deferring the call, matching the existing pattern. Confirmed fixed on real hardware.

#145 Job tab workspace lost width priority to the Feed/Spindle/Outline column

File	+	-
ioSender XL/ioSender XL/JobView.xaml	6	1

The right-hand slot panel (Feed rate/Spindle/Outline) only had a MinWidth, so it could stretch as wide as its content wanted at the expense of the Program/3D View/Console workspace, which only got whatever width was left over. Capped at MaxWidth=260 - that column's content wraps to more lines instead, which its own ScrollViewer already handles.

#146 Message box text was too small

File	+	-
CNC Controls/CNC Controls/AppMessageBox.xaml	1	1

AppMessageBox is the one funnel every message box in the app (146+ call sites, via AppDialogs.Show) routes through, so bumping its text size here fixes all of them at once.

#147 -message launch flag: show a popup once the app is up

File	+	-
ioSender XL/ioSender XL/App.xaml.cs	11	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	51	0

Dev/testing convenience, same idiom as the existing `-testserver/-debuglog` flags: `-message="text"` shows a plain informational popup once the main window is up and painted, skipped for a `-testserver` launch since no one is watching that window interactively.

Also folds in MainWindow's run-bar copy of the OBS Control "All" recording toggle (see the camera-control entry above) and standing diagnostic logging for an intermittent, still-unreproduced ATC-macro-gate false positive.

#148 "Restart to apply" silently closed the app instead of relaunching; dead AppLaunch supervisor removed

File	+	-
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	15	10
CNC Controls/CNC Controls/PipeServer.cs	1	1
ioSender XL/ioSender XL/App.xaml.cs	8	2
tools/run-iosender.ps1	8	8
ioSender XL/ioSender XL.sln	0	10
CNC Core/CNC Core/RelaunchSupervisor.cs	0	38
CNC AppLaunch/ (whole project, 7 files)	0	356

Clicking **Restart** on any Settings tab that flags a restart-only change just closed ioSender and never reopened it - the new process's own single-instance startup probe found the still-shutting-down old instance still listening on the singleton pipe, forwarded into it, and exited immediately.

- **Root cause** - a race between `GrblConfigView.DoRestart()`'s `Process.Start`-then-`Shutdown` fallback and `PipeServer`'s single-instance check in `App.xaml.cs`. An earlier attempt at disposing the old listener before relaunching looked correct in isolation but failed under real timing (`NamedPipeServerStream.Dispose()` doesn't reliably cancel a pending `WaitForConnection()` on .NET Framework).
- **Fix** - the child process is now launched with `IOSENDER_SELF_RELAUNCH=1`, and `App.xaml.cs` skips the single-instance probe for that one launch, since it's a known self-relaunch rather than a genuine second instance. Verified end-to-end via UIAutomation: old instance closes, new instance comes up and responds, and a genuine third launch still correctly single-instance-forwards afterward.
- **AppLaunch.exe removed entirely** - the CNC AppLaunch project and `RelaunchSupervisor.cs` implemented an exit-code relaunch-supervisor protocol that turned out to be dead code: `install.ps1`'s desktop shortcut always launched `ioSender.exe` directly, so the supervisor path was never actually wired into the real product.

#149 Generate buttons now save their program to disk; Start Job Corner 2 ALARM:2 fixed (Safe Z delta)

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	21	2
ioSender XL/ioSender XL/StartJobView.xaml.cs	20	3
ioSender XL/ioSender XL/StartJobView.xaml	2	2
CNC Controls/CNC Controls/AutoSquareWizard.xaml.cs	1	3
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml.cs	1	3
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml.cs	1	3
Locale/en-US/csv/ioSender.resources.en-US.csv	2	2

Two related fixes from a real hardware debugging session.

- **Generate-to-disk logging** - every tab with a Generate button (Start Job, Auto square, Stepper calibration, Surface spoilboard) now writes its generated program to %AppData%\ioSender\Generated\- **Start Job Corner 2 ALARM:2, hardware-confirmed root cause** - the field controlling the safe crossing height between corners (c1_maxz = corner 1's measured stock top + this value) had silently persisted at 0mm, leaving zero clearance for corner-to-corner travel. Renamed the confusingly-named "Corner travel margin (Z)" field to "**Safe Z delta**", and Generate now warns (not blocks) if it's set below the 10mm default - confirmed on real hardware that 5mm was still not enough clearance and broke a probe tip; 1" (25.4mm) ran Start Job through to completion.

#150 User-draggable GridSplitters: Start Job, Height Map, Probing/Tools sub-tabs, Job tab's 3 regions

File	+	-
ioSender XL/ioSender XL/JobView.xaml	58	31
ioSender XL/ioSender XL/HeightMapView.xaml	11	3
Probing sub-tabs (Center/Edge ext/Edge int/Tool length)	26	12
Tools sub-tabs (Auto Square/Stepper cal/Stepper cal scratch/Surface spoilboard)	25	13

Every 2-column "setup inputs | drawing" view now has a real draggable divider instead of a fixed split. First attempt put the splitter on the shared column boundary (behind the input panel's own content, which swallowed its hit-test area - no resize cursor ever appeared on most views, and one that did show a cursor still didn't drag); fixed by giving each splitter its own dedicated column, the same approach already proven on the Job tab's two dividers.

- **Job tab** - left sidebar / Program-3D View-Console tabs / right sidebar converted from a DockPanel's fixed Left/fill/Right docking to a Grid with two GridSplitters. The right sidebar's own internal Feed/Spindle/Outline column split keeps its existing MaxWidth=260 cap untouched.
- **Start Job / Height Map** - left column also made proportional (min original px width) instead of a hardcoded pixel width, so it no longer gets squeezed as the window widens.

User-verified on real hardware across all views.

#151 Start Job probes the fence's origin corner once instead of twice

File	+	-
CNC Controls/CNC Controls/Fixture.cs	52	3
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	104	4
ioSender XL/ioSender XL/StartJobView.xaml.cs	48	42
ioSender XL/ioSender XL/StartJobView.xaml	24	3
CNC Controls/CNC Controls/AppConfig.cs	24	0
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	17	2
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	7	0

Fixture.CornerRadiusX/Y and Fixture.SpoilboardZ (new): captured once by FixtureEditDialog's "Test position" via a real pcorner.macro probe against the physical fence, instead of Start Job re-locating the corner and re-probing the spoilboard every single job. StartJobView.BuildProgram's corner-1 probe now runs in REUSE mode using these cached values, landing directly on the tight 5mm-inset anchor in one probe instead of a loose locate pass followed by a tight re-probe (the old "exact size" corner-1 block, now removed).

- **Fixtures.SetItems/Load** now mutate the existing collection in place instead of replacing the reference - MachineSetupWizard binds its fixture grid before AppConfig.LoadConfig() runs, so a reference swap was silently orphaning that binding (only fixtures added/edited in-session ever showed).
- **Fixture.Coords** setter no longer clears CornerOffsetX/Y/SpoilboardZ itself - that fired during XML deserialization too (property setters run in declared order), silently zeroing a just-loaded valid offset on every app load.
- **OffsetFlyout's** G28 fixture picker was filtering the SHARED default CollectionView of the app-wide Fixtures.Items, which leaked its "validated only" filter into every other control bound directly to that same collection (Machine Setup's own fixture grid showed only one fixture, looking like the rest had been deleted). Now uses its own private ListCollectionView.
- **StartJobView** - Width/Height/Thickness/units used to be the only fields gated on a fixture being selected; Probe type, Set origin, Measure/Rotate/Exact-size/TLO-ref and Safe Z delta were left fully interactive with none chosen. Gated as one block now. Left column was also a hardcoded 360px width, squeezing text as the window widened - now proportional.

Two real hardware bugs found and fixed along the way: the corner-locate probe was silently inheriting a stale DISCOVER flag (probed the spoilboard twice), and it parked 10mm outward instead of at the true corner, landing 5mm outside the corner instead of inside it.

#152 NumericField stores canonical mm internally; unit toggle is display-only

File	+	-
CNC Controls/CNC Controls/NumericTextBox.cs	86	2
CNC Controls/CNC Controls/UIUtils.cs	62	0
CNC Controls/CNC Controls/NumericField.xaml.cs	31	1
ioSender XL/ioSender XL/StartJobView.xaml.cs	40	50
CNC Controls/CNC Controls/NumericField.xaml	2	1

Closes the long-standing improvement-backlog item: NumericField.Value is now ALWAYS canonical mm for any field whose Unit is "mm"/"in" - every other Unit ("mm/min", "s", "deg", "%", ...) is completely untouched, so this is a no-op for the ~286 existing NumericField uses that never touch inches.

- **NumericField.IsImperial** (new, inheritable) - set ONCE on a container (a tab's root panel), every NumericField underneath picks it up automatically via WPF property inheritance and re-displays its already-canonical Value in the new unit - no per-field looping, no external code touching Value at all.
- **Input parsing** moved from strict per-keystroke rejection to commit-time (blur/Enter) for length-unit fields, so it can accept free typing including an inline unit suffix that overrides the field's own displayed unit for that one entry.
- **StartJobView migrated** as the proof of concept: every ToMm/FromMm wrapper around a NumericField.Value read/write is gone; the unit-toggle handler is now a single SetIsImperial call instead of manually converting 5 fields.

AutoSquareWizard/SurfaceSpoilboardWizard/StepperCalibrationScratchWizard still have their own pre-existing manual ToMm/FromMm wiring - not yet migrated.

#153 pcorner.macro side probes at a fixed 5mm below top, not the stock midpoint

File	+	-
macros/pcorner.macro	16	13

Was top - thickness/2 (self-safe for any thickness, but dependent on the caller's estimated stock thickness, which is only ever a guess before Measure has actually run) - now a fixed 5mm inset per user request. The thickness global is no longer read by this macro at all (still accepted from callers, kept in case it's wanted again).

Not self-safe for very thin stock the way the midpoint approach was - anything under ~5mm has its side face searched below its own bottom face. Documented minimum stock thickness precondition bumped from 3mm to 5mm.

#154 Start Job stock schematic: bigger, clearer dimension/angle/thickness labels

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	39	20

Per-corner angle + thickness/Z used to be one combined label outside the corner; split into two - angle (a property of the drawn box shape) now sits INSIDE toward the centre, thickness/Z (a material reading at that point, not the shape) stays OUTSIDE past the corner. Offset bumped 22px -> 30px so the larger text doesn't crowd the corner.

#155 New Tools sub-tab: Stepper Calibration (Probe) + Start Job calibration-mismatch warning

File	+	-
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml.cs	497	0
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml	64	0
CNC Controls/CNC Controls/ToolsView.xaml.cs	39	1
CNC Controls/CNC Controls/AppConfig.cs	33	0
ioSender XL/ioSender XL/StartJobView.xaml.cs	37	0
CNC Controls/CNC Controls/LayoutModel.cs	4	2
CNC Controls/CNC Controls/CNC Controls.csproj	7	0
CNC Controls/CNC Controls/LibStrings.xaml	1	1
CNC Controls/CNC Controls/IGrblConfigTab.cs	1	0

New Tools sub-tab "Stepper Calibration (Probe)": calibrates steps/mm by probing a reference block of ALREADY-KNOWN true size against a validated Corner Fence fixture, instead of V-bit scratch marks measured by hand with calipers - removes the manual-measurement step that was the likely source of an existing bad calibration (a probed touch is far more repeatable than reading a scratch mark with calipers). Reuses the corner-1 single-probe optimization (#151). Parks at G30 and prompts to install the probe before touching anything, same as Start Job; the tab itself is disabled whenever no 3D probe is configured. Shows the actual $\text{new} = \text{current} \times \text{measured} \div \text{true}$ calculation next to the measured values, plus an Undo button that reverts to the steps/mm value from right before the last Save.

- **Start Job** - a one-shot warning dialog fires when "Stock size is exact" is checked and the measured X/Y differs from the entered exact size by more than 0.5mm once all 4 corners are in - suggests running Stepper calibration, since that mismatch is exactly what motivated building this tool.
- **Old "Stepper calibration"** tool renamed to "Stepper calibration (Manual)" to disambiguate. Tools tab reordered (Probe, Squareness, Spoilboard, Scratch, Manual, then Tool table/Trinamic/PID) via a one-time layout-tree fixup.

User-verified on real hardware: converged from a ~1.5mm measured error to sub-0.01mm over two calibration passes. An inverted first attempt at the steps/mm formula made the error WORSE (~1.5mm -> ~4mm) before landing on the correct $\text{current} \times \text{measured} \div \text{true}$ direction.

#156 Versioned releases (2.N) replace the rolling "latest" build

File	+	-
tools/cut-release.ps1	130	0
.github/workflows/release.yml	40	24
tools/add-changelog-entry.ps1	2	1
ioSender XL/ioSender XL/BuildInfo.cs	2	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	40	30
install.ps1	3	2

The rolling "latest" release (one unversioned prerelease, overwritten on every push, with a body no more informative than a commit SHA) is gone. `tools/cut-release.ps1` now runs on every push to master: it looks up the previous published release, diffs `Overview.html`'s changelog entries against that release's embedded `changelog-through:N` marker, and publishes a real numbered release (v2.1, v2.2, ...) whose notes list exactly the #N entries that shipped in it. The Features & Fixes TOC gains a **Version** column, stamped by the same script, so every entry shows which release it first shipped in. `install.ps1` and Check for Updates both switched from GitHub's by-tag/prerelease workaround (comparing commit SHAs) to the real `releases/latest` endpoint, comparing version numbers numerically instead.

The 13 rolling builds published since 2026-07-15 were backfilled as real historical releases (v2.1-v2.13, each tagged at its actual commit) so the version history matches what actually shipped, rather than starting cold.

#157 Install command now runs from CMD too; window title showed the wrong version

File	+	-
tools/cut-release.ps1	3	3
install.ps1	6	2
ioSender XL/ioSender XL/MainWindow.xaml.cs	4	3

The release-notes install command used bare `irm ... | iex`, which only works in PowerShell - pasting it into `cmd.exe` just prints an error. It's now wrapped as `powershell "irm ... | iex"`, which runs correctly from either shell.

Separately, the main window's title bar (and splash screen) showed a hardcoded `2.0.1` left over from before the versioned-release pipeline existed, instead of the actual installed release version (e.g. `2.18`). `MainWindow.Version` now reflects `BuildInfo.Version` for real published builds.

#158 Macro WAITIDLE false-abort after a burst's trailing motion

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	56	8
ioSender XL/ioSender XL/MainWindow.xaml.cs	74	27

A macro's (WAITIDLE) directive could false-abort right after a G30 park move, even though the move completed cleanly - hit intermittently on both Start Job and Stepper Calibration (Probe).

- **Root cause** - the streamer's own "burst complete" signal could fire a beat early (a transient Idle status blip between the last line being accepted and the controller actually starting to execute the queued motion), so WAITIDLE's guard walked straight into the real motion resuming a moment later and aborted.
- **Fix** - removed the immediate-fail guard and let WAITIDLE fall into its own already-robust, report-driven completion loop (two consecutive real Idle reports, stall/alarm detection), which correctly waits out the trailing motion instead of racing it.

Confirmed via targeted diagnostic tracing + the raw comms log, then verified fixed on real hardware across repeated Start Job and Stepper Calibration (Probe) runs.

#159 Stepper Calibration (Probe): parks at G30, Safe Z delta field, program view auto-hides on success

File	+	-
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml	3	0
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml.cs	19	6
ioSender XL/ioSender XL/StartJobView.xaml.cs	1	6
Locale/*/csv (7 locales)	16	0

Two small usability fixes to Stepper Calibration (Probe), plus a general Generate/Run polish item that applies to every tool tab.

- **Parks at G30 when done** - was just lifting to Z0 above the last probed corner, leaving the probe sitting mid-air; now uses the same shared G30-park helper Start Job already relies on (extracted into `MacroProcessor.EmitGotoG30` so both tools share one tested implementation).
- **Safe Z delta field** - the corner-to-corner travel height was hardcoded (15 mm); it's now an editable field matching Start Job's own "Safe Z delta", persisted per session.
- **Program view auto-hides on success** - any tool's Generate'd program preview used to sit in its shrunk 3-line "run view" state after a clean finish; it now fully hides once the run completes with no error, instead of lingering until a 20-second timer or the next run reused it. On an actual error it's still left up so the operator can see what failed.

#160 Start Job: synthetic "G28 (loose probe)" fixture - no saved fixture required

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	6	2
ioSender XL/ioSender XL/StartJobView.xaml.cs	77	18

Start Job's fixture dropdown always has a working option now, even with no fixture library set up: a synthetic **"G28 (loose probe)"** entry, always present (never saved to the fixture library), that recreates the original pre-Fixture-library Start Job behavior.

- Corner 1 probes in a loose DISCOVER pass anchored live at the controller's own G28 stored position, instead of a real Fixture's tight cached corner offset - read at run time (grblHAL's G28 named parameters), never baked into the generated program.
- If G28 isn't set yet, Generate offers to set it on the spot: jog to the position you want to probe the spoilboard from, click OK to store it there (G28.1), or Cancel to back out.
- Everything after corner 1 - Measure, rotation, exact size, tool-length reference, origin set - runs exactly like a real Corner Fence fixture, since it only ever consumes corner 1's measured result, not how it was obtained.

User-verified on real hardware, both paths (G28 already set, and G28 unset via the jog-and-confirm dialog).

#161 Cycle Start renamed to Run, with a proper run-mode dropdown

File	+	-
CNC Controls/CNC Controls/JobControl.xaml	90	25
CNC Controls/CNC Controls/JobControl.xaml.cs	179	85
Wording touch-ups, "Cycle Start" → "Run" (13 files: AutoSquareWizard, Converters, FixtureEditDialog, JobView, KeyMapEditor, MainWindow, StepperCalibration{Probe,Scratch}Wizard, SurfaceSpoilboardWizard)	18	18
Locale/*/csv (7 locales x 2 resource files)	119	56

"Cycle Start" never said what it actually does - renamed to **Run** throughout the run bar, its tooltips, and everywhere else the button is mentioned.

- **New mode dropdown** replaces the old right-click context menu: a small arrow to Run's right opens a list of **Run / Dry Run / Check Run** - picking one relabels the button to match, so the current mode is always visible at a glance instead of hidden behind a right-click.
- **Disabled-state tooltip** - hovering Run while it's greyed out now explains why (load a file or generate a program first) instead of showing nothing.
- **Mode-aware tooltip** - when enabled, the tooltip describes exactly what THIS press will do (plain run, Dry Run's Z-offset/spindle-off behavior, or Check Run's \$C validation), not just a static "Alt+R".
- **Check Run no longer sends \$C until you press Run** - selecting it from the dropdown only arms the intent; previously it activated check mode immediately on selection, which greyed out Home and other Idle-gated controls before the operator had even started anything.
- **Always reverts to Run when a job ends** - normal finish, error, or stop/abort all now leave the button back on plain Run (previously Check mode could linger indefinitely, since grblHAL has no auto-exit for \$C - it needed an explicit reset, which now happens automatically).

User-verified on real hardware across all three modes.

#162 Generate button eliminated on 5 tool tabs – folded into the shared Run bar

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	43	0
CNC Controls/CNC Controls/JobControl.xaml.cs	66	12
CNC Controls/CNC Controls/JobControl.xaml	13	5
ioSender XL/ioSender XL/StartJobView.xaml.cs	35	2
ioSender XL/ioSender XL/StartJobView.xaml	0	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	9	0
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml.cs	41	3
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml	0	2
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml.cs	38	4
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml	1	3
CNC Controls/CNC Controls/AutoSquareWizard.xaml.cs	39	1
CNC Controls/CNC Controls/AutoSquareWizard.xaml	0	2
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml.cs	36	8
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml	1	4
Locale/*/csv (7 locales)	21	0

Every tool tab that generated an in-memory probe/test program before running it (Start Job, Stepper Calibration Probe, Stepper Calibration Scratch, Auto Square, Surface Spoilboard) had its own standalone Generate button, separate from the shared Run bar pinned at the main-window bottom. That's gone now – the shared Run bar itself takes over both roles.

- **MacroProcessor** gains four new statics alongside the existing `ActiveRun/ActiveProgramName`: `SupportsGenerateMode`, `IsGenerateReady`, `IsProgramGenerated`, `ActiveGenerate`, and `DiscardGenerated` – a Generate-capable tab registers these on `Activate(true)` and clears them on `Activate(false)`, same lifecycle as `ActiveRun`.
- **JobControl**'s Run bar reads "Generate" (disabled until that tab's own live readiness check passes) while focused on one of these tabs and nothing has been built yet; pressing it only builds the program (no run). Once built the button reads plain "Run" and a press streams it, same as any other wizard-driven run. The Dry Run/Check Run mode dropdown is hidden outright for the whole time such a tab is focused – neither applies to these tools.
- After a run that tab owned finishes cleanly (the same `isFinalBurst/Idle` hook that already auto-hides the program view), **MainWindow** calls the tab's `DiscardGenerated`, dropping the in-memory program and reverting the bar to "Generate" for the next job. Left alone on error/halt so the operator can still inspect or re-run the same generated program after fixing whatever interrupted it.
- Each tab wires its existing readiness checks (fixture selected, travel legs known, current steps/mm valid, no outstanding warning, etc.) into `IsGenerateReady` instead of a local button's `IsEnabled` – no new validation was invented, the same preconditions just now drive the shared bar. A new `isActiveTab` guard on every migrated tab stops a stale event (`Model_PropertyChanged` stays subscribed after a tab is left) from stomping whichever OTHER Generate-capable tab is now focused, since these statics are global.

- `JobControl.UpdateStartButtonLabel` renamed to **`UpdateRunButtonLabel`** (there is no "Start" button in this UI, only Run) – naming-only, no behavior change.

Debug build verified clean; all 5 tabs driven end-to-end via `-testserver` (label/enable/dropdown-visibility state on each tab, plus one live Generate-press round trip confirming the button flips Generate to Run with the dropdown staying hidden). The discard-after-run revert-to-Generate path shares the same `isFinalBurst` hook as the existing program-view auto-hide (verified on real hardware last session) but was not itself re-verified against a live/simulated controller this session.

#163 Status bar: permanent large message font, flash-color notice instead of enlarge/shrink

File	+	-
CNC Core/CNC Core/GrblViewModel.cs	30	2
ioSender XL/ioSender XL/MainWindow.xaml	20	13
ioSender XL/ioSender XL/MainWindow.xaml.cs	31	29

The status line's old "enlarge to 2x for 10s then shrink back" notice mechanism shifted the whole window's layout up and down every time a message arrived - distracting, and easy to miss anyway since it reverted itself. Replaced with a permanently large font (doubled once at startup from whatever the ambient default is) and a background color flash that carries the notice instead, with no layout movement.

- **GrblViewModel** gains `IsMessageError`, set by a new `SetErrorMessage` helper used by the two real error sources - `SetGrblError` and the Alarm-state transition - so the status bar can distinguish an actual error/alarm from a plain status update. Every other `Message` assignment (~24 call sites, untouched) resets the flag to false, so nothing needed to opt in.
- **MainWindow**'s status message is now wrapped in a `Border` (`msgFlashBorder`) whose background flashes light green for a normal message or light red for an error, fading to transparent over 5s via a one-shot `ColorAnimation`.

Debug build verified clean; visually confirmed on real hardware (red flash on a real controller error/alarm, permanent large font, stable layout). Green flash for a normal message not independently re-confirmed after testing was cut short by an unrelated MDI-safety incident during this session (see the testserver-real-hardware-safety note) - low risk, same code path as the error flash with only the color swapped.

#164 Stepper Calibration (Probe): Z axis via a 1-2-3 gauge block

File	+	-
CNC Controls/CNC Controls/StepperCalibrationProbWizard.xaml.cs	457	17
CNC Controls/CNC Controls/StepperCalibrationProbWizard.xaml	45	19
CNC Controls/CNC Controls/MacroProcessor.cs	24	0
5 Generate-first tabs (tab-leave discard fix)	30	0
Locale/*/csv (6 non-English locales)	84	0

A new **Calibrate: XY steppers / Z stepper (1-2-3 block)** toggle on the Stepper Calibration (Probe) tab adds a Z-axis calibration path alongside the existing XY one, using a standard 1-2-3 gauge block instead of a corner-fence reference square.

- Enter the block's three known dimensions (default 1/2/3 in, mm/in toggle). Generate builds a program that parks at G30, probes the spoilboard once as a shared baseline, then prompts three times to present the block's small/middle/large side up in turn (only one orientation fits at each prompt's retract height) and probes each.
- All three measured-vs-true deltas and errors are shown, then combined into one corrected Z steps/mm via a least-squares fit through the origin ($k = \Sigma(\text{true} \cdot \text{measured}) / \Sigma(\text{true}^2)$) rather than trusting any single probe - Save/Undo now handle \$102 alongside the existing \$100/\$101.
- **Reuse last saved starting position** checkbox skips the manual jog prompt on repeat runs, rapiding to the saved XY at machine top first, prompting to confirm clear, then descending. The position is only persisted once the spoilboard probe actually TRIGGERS (not merely on arrival) and is invalidated - checkbox auto-unchecked and disabled - whenever a steps/mm Save would make the cached position physically stale (a saved mm value is `step count / current steps_per_mm`; changing `steps_per_mm` changes what that mm value means).

Also fixes two bugs found while testing this feature, both general rather than Z-tool-specific: MacroProcessor's macro loop now aborts immediately if a flushed G-code burst alarmed, instead of continuing on to the next prompt as if nothing had gone wrong (same check `(WAITIDLE)` already had); and all 5 Generate-first tool tabs now discard their generated program on tab-leave, not just after a run finishes, so returning to a tab always starts fresh at "Generate". Debug + Release both build clean; verified end-to-end on real hardware across several iterations (sign-inversion fix, retract-ordering fix, reuse-position staleness/corruption fixes).

#165 Check for Updates now works on local dev builds – pick a release to install over it

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	131	2
CNC Controls/CNC Controls/ReleasePickerDialog.xaml.cs	62	0
CNC Controls/CNC Controls/ReleasePickerDialog.xaml	20	0
install.ps1	28	8

Previously, Check for Updates on a local `build.ps1` build just refused ("no embedded version to compare against a release"). It now queries GitHub for every published release that carries an installable `ioSender.zip` asset, offers a pick-a-release dropdown, and on OK installs the chosen release **over this dev build's own bin folder** (not the normal `%LocalAppData%` install location) — useful for quickly comparing a real published build against in-progress dev work without disturbing a separate install.

- **New ReleasePickerDialog** — OK/Cancel dropdown of every release with an installable asset, newest first.
- **install.ps1 gains -Tag <version> and -InstallDir <path>** — install a specific release into an arbitrary folder instead of always the latest into the default location; skips the desktop shortcut when a custom install dir is given.

User-verified end-to-end: installed 2.15 from a dev build, then updated 2.15 → 2.21 via the normal Check for Updates path. Builds clean Debug/Release.

#166 Apple-HIG visual redesign: design system + all main tabs

File	+	-
CNC Controls/CNC Controls/AppleStyles.xaml	190	0
CNC Controls/CNC Controls/NumericField.xaml	52	17
ioSender XL/ioSender XL/MainWindow.xaml	58	2
ioSender XL/ioSender XL/App.xaml	5	0
CNC Controls/CNC Controls/JobControl.xaml	5	1
CNC Controls/CNC Controls/MacroManagerDialog.xaml	5	2
CNC Controls/CNC Controls/JogBaseControl.xaml	7	1
CNC Controls/CNC Controls/OffsetView.xaml	3	1
Remaining tab/control XAML (implicit-style adoption, 25 files)	27	23

Replaces the flat, monochrome control styling with a small, deliberate design system (AppleStyles.xaml) rolled out across Job, Settings, Probing, Height Map, SD Card, Offsets, Machine Setup and Tools tabs:

- **One primary button per screen** - a single solid-accent CTA (Start/Run/Upload/Set/Apply) per tab; every other button stays neutral gray, including when disabled.
- **Color-by-function panel dots** - GroupBox headers pick up a small colored dot (position/teal, jogging/purple, feed & spindle/ochre, coolant/steel-blue) via a HeaderTemplate that wraps the existing localized header text without touching localization.
- **Pill-style main-nav tabs** - the top-level tab strip gets rounded, spring-animated selection with a light-accent fill, scoped to the top-level StretchTabControl only so it doesn't leak into nested sub-tab strips (Settings, Probing, Tools).
- **Recessed numeric fields** - NumericField.xaml switched to TemplateBinding so per-instance background/border overrides (e.g. the merged-unit suffix trick) keep working.

Built via parallel worktree agents, one per tab, then merged; every tab reviewed live by the user before merge.

#167 Machine Setup: optional steps (Fixtures, Simulator) always show green

File	+	-
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	16	5

The Fixtures and Simulator steps in the Machine Setup wizard are optional - there's no gate to fail - but were left with no step color at all, which read as "not checked yet" rather than "passed". They now always color green. Separately, the step-7 (ATC macros) tab color now reads from the same `AtcMacros.GetStatus()` query the gate-check itself just ran, instead of issuing a second, potentially-stale query.

#168 SD Card tab no longer shows "No card" while mount status is still resolving

File	+	-
CNC Controls/CNC Controls/SDCardView.xaml.cs	7	3

The tab treated an Undetected mount status as an immediate "No card" - but that status just means nothing's been reported yet, not that there's no card. It now calls the same file-list query the ATC macro status uses first, and only falls back to "No card" once the status explicitly resolves to Unmounted.

#169 Silent update check in the title bar + live rebuild-status on Settings > Simulator

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	48	0
CNC Controls/CNC Controls/SimulatorConfigView.xaml.cs	12	0

On launch, a silent background check against the GitHub releases API appends "(update available)" to the window title if a newer release exists (dev builds and any network/API failure are silently ignored - separate from, and doesn't touch, the existing interactive Check for Updates flow).

Settings > Simulator's "up to date" / "click Build to update" status text previously only refreshed on tab-show or after a build, so toggling an option checkbox mid-visit left it showing stale info until you navigated away and back. It's now wired to every option control's change event.

#170 Sidebar flyout panels no longer overlap the main-nav tab strip

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml	7	7
ioSender XL/ioSender XL/MainWindow.xaml.cs	35	0
CNC Controls/CNC Controls/SidebarItem.cs	34	3

The sidebar's flyout panels are positioned two ways that both needed fixing: each flyout's own vertical slot was previously driven by a `static` running counter that accumulated across the whole app session in item-registration order, unrelated to the actual on-screen tab order - replaced with a `TranslatePoint` alignment against each flyout's own tab. The container's top margin (clearing the main-nav tab strip) was a hardcoded pixel guess that had to be re-tuned by hand every time the tab strip's rendered height changed (font, DPI, the Apple-HIG pill redesign's `MinHeight` bump) - two such guesses both proved wrong on live testing. It's now measured from the tab control's real `TabPanel` template part and kept in sync via `SizeChanged`, so it self-corrects if the template ever changes again.

#171 Offsets tab rework: inline-editable grid with change tracking, correct G28/G30/G92 semantics

File	+	-
CNC Controls/CNC Controls/OffsetView.xaml	153	72
CNC Controls/CNC Controls/OffsetView.xaml.cs	197	108
CNC Core/CNC Core/Grbl.cs	83	1

The Offsets tab's old side-panel editor is gone - X/Y/Z are now inline `NumericUpDown` grid cells, with a `Clr` (zero + commit) and `Get MPos` (stage current machine position) column per row. A row commits when focus leaves it (or the tab is switched away from); G54-G59.3 save silently, while G28, G30 and G92 confirm first.

- **Correct G28/G30/G92 semantics.** G28.1/G30.1 capture wherever the machine physically is right now - no app-driven rapid move to a typed target any more. G92 has no equivalent "capture current position" primitive - it only knows how to declare "the machine's current position is this work coordinate", so re-declaring the row's own `Get-MPos` snapshot was silently collapsing the offset toward zero. Row-leave on G92 now always sends the conventional "zero the work origin here" (G92 X0 Y0 Z0), which is what actually leaves the controller reporting back the captured position.
- **Change tracking.** Each row carries the same orange (unsaved edit) / blue (saved, different from session startup) convention as the `Grbl` settings tree, plus a right-click "Restore to value at startup". A write now waits for the controller's "ok" before marking a row committed, and the modified-value comparison tolerance was widened to absorb normal machine settling jitter between a `Get MPos` snapshot and the value echoed back by the next status query - both were previously showing a just-saved row as still edited for one extra tab round-trip.
- **Sign-constrained X/Y/Z** per this machine's home-corner convention ($X \geq 0$, $Y/Z \leq 0$), with inline validation.

Verified interactively against real hardware, including the G92/G28/G30 write-and-reread round trip.

#172 UI polish: oval checkboxes, unit-toggle peek, tab-drag/flyout fixes, stale status messages

File	+	-
CNC Controls/CNC Controls/AppleStyles.xaml	41	0
CNC Controls/CNC Controls/NumericField.xaml	17	0
CNC Controls/CNC Controls/NumericField.xaml.cs	55	0
CNC Controls/CNC Controls/UnitToggleMenu.cs	107	0
CNC Controls/CNC Controls/SharedStyles.xaml	11	0
CNC Controls/CNC Controls/BasicConfigControl.xaml	12	8
CNC Controls Probing/CNC Controls Probing/ConfigControl.xaml	11	7
CNC Controls/CNC Controls/StretchTabControl.cs	51	6
CNC Controls/CNC Controls/TabKeyBinder.cs	10	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	24	1
CNC Controls/CNC Controls/JobControl.xaml.cs	20	3
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	6	2
ioSender XL/ioSender XL/StartJobView.xaml	104	75
ioSender XL/ioSender XL/StartJobView.xaml.cs	111	91
Machine Position/Limits/Spindle/Lathe DRO fields (unit-toggle + minor)	21	10

A grab-bag of visual and small-behavior polish that came out of hands-on testing this session.

- **Oval checkboxes app-wide.** The stock square+tick was reported nearly invisible at normal viewing distance - replaced with a small oval indicator (outlined at rest, solid accent blue with a check glyph when checked) via one keyless style in AppleStyles.xaml.
- **NumericField:** read-only fields get muted styling instead of looking editable; a new ShowUnit flag hides a redundant unit label (e.g. Limits' Min/Max pair) without opting the field out of unit conversion; and a new right-click "Show in inches/millimeters" gives a one-time tooltip peek at the value in the other unit, without a persistent per-field toggle that could drift out of sync with the app-wide metric/imperial setting.
- **Tab-header drag no longer leaves debris.** MainWindow's pinned sidebar flyout icons (docked as a sibling of the tab strip, outside what StretchTabControl can Clip) now hide for the duration of a drag instead of repainting alongside the clipped tab content; fixed a null-ref when a live reorder's own SelectionChanged re-entrantly cleared the dragged-tab field mid-drag. TabKeyBinder's "Bind to Key" context menu is now scoped to the tab header element, not the whole tab body.
- **Two stale-message fixes:** JobControl's "<name> ready - press Run to run" line no longer appears before Generate has actually been pressed on a Generate-first tab, or lingers on screen after a run has started; FixtureEditDialog's "home first" warning now shows in a visible dialog instead of a status message hidden behind the modal that triggered it.

#173 Generate button loses its green “ready” cue on a fresh tab; Z-gauge reuse descend hardened

File	+	-
CNC Controls/CNC Controls/JobControl.xaml	5	0
CNC Controls/CNC Controls/JobControl.xaml.cs	14	0
CNC Controls/CNC Controls/StepperCalibrationProbeWizard.xaml.cs	8	0

Two small fixes found while exercising Stepper Calibration (Probe):

- **Generate button green cue** — when the shared Run bar folded the standalone Generate button into itself (#162), the green “ready to press” highlight was tied to a flag that’s deliberately false while the button still reads “Generate” (it also drives the “ready – press Run to run” status text, which must stay quiet until a program actually exists). That correctly kept the status text quiet but also left Generate looking dead on tab entry. A separate flag now drives just the button color, decoupled from that status text.
- **Z-gauge reuse-saved-position hardening** — added a (WAITIDLE) gate after the rapid descend to the saved Z in the “reuse last saved starting position” path, before the automated probe search that immediately follows it with no operator click in between to absorb settle time – the same class of burst-trailing-motion race already fixed for the G30 park move.

Builds clean Debug. Generate-button fix user-confirmed visually. The Z-gauge reuse descend issue did not reproduce on retest (with or without this change) - kept as a defensive hardening, not a confirmed root-cause fix.

#174 Tools-tab inputs colon-align; generated .macro filenames no longer collide across a tab's own variants

File	+	-
CNC Controls/CNC Controls/NumericField.xaml	6	2
Tools-tab XAML (Auto Square, Stepper Cal Probe/Scratch, Surface Spoilboard)	4	4
ioSender XL/ioSender XL/StartJobView.xaml	1	1
Tools-tab code-behind (Auto Square, Stepper Cal Probe/Scratch)	7	7
ioSender XL/ioSender XL/StartJobView.xaml.cs	2	2

Two related cleanups to the 5 Tools tabs (Start Job, Stepper Calibration Probe/Scratch, Auto Square, Surface Spoilboard):

- **Colon-aligned inputs** — each row's value box used to stretch from right-after-its-own-label all the way to the tab's right edge, so a short label ("Feed rate:") sat next to a huge empty-looking box while a long one ("Gauge size 2 (middle):") sat right against it — and labels of different lengths didn't line up. `Grid.IsSharedSizeScope="True"` on each tab's root now makes every row's label column match the tab's longest label, so labels right-align on a shared colon and each box grows to fill the space after it.
- **Disambiguated generated filenames** — the diagnostic copy every Generate/Run writes to `%AppData%\ioSender\Generated\*.macro` was named only for the tool (e.g. `stepper_calibration__probe_.macro`), so Stepper Cal Probe's XY vs Z modes, Scratch/Auto Square's per-axis runs, and Start Job's per-fixture programs all landed on one shared file – whichever ran last silently overwrote the others. The distinguishing top-level selection (axis, or fixture name) is now folded into the name passed to both the Generate-time save and Run's own internal save. Surface Spoilboard has no such variant and is unchanged.

Builds clean Debug. User-verified the colon alignment visually on Stepper Calibration (Probe) Z mode.

#175 ATC macro gate false-trips “Outdated” when a poll response lands mid-checksum-read

File	+	-
CNC Controls/CNC Controls/AtcMacros.cs	5	1
CNC Controls/CNC Controls/SDCardView.xaml.cs	4	1

Reproduced and fixed a long-standing intermittent bug: the Machine Setup wizard's ATC-macro-provisioning gate would sometimes report a freshly-uploaded macro as “Outdated” and re-trip step 7, even though the controller's filesystem held the exact right bytes.

- **Root cause** — not a race condition as first suspected, but a response-filtering bug:
AtcMacros.ReadControllerFile and SDCardView.ReadFileContent both read a controller file via \$F≡ (dump) while GrblViewModel.SuspendProcessing is set, which reroutes every incoming serial line to the caller unfiltered — but the poll thread keeps running and sending ? the whole time. Neither dump reader excluded realtime status lines (<Idle| ... >) from the captured text, so a poll reply landing mid-read got appended straight into the checksum, corrupting it against the freshly-computed embedded checksum.
- **Fix** — both readers now exclude lines starting with <, same as they already excluded ok/error/[.

User-verified: launching with the controller already in an unhomed Alarm state — the condition that most reliably surfaced the race — no longer trips the gate.

#176 Job tab Run dropdown gains a fourth mode: Simulate

File	+	-
CNC Controls/CNC Controls/JobControl.xaml.cs	63	0
ioSender XL/ioSender XL/MainWindow.xaml.cs (Simulate switch/restore)	63	0
CNC Controls/CNC Controls/AppConfig.cs	29	0
CNC Controls/CNC Controls/SimulatorManager.cs	11	0
CNC Controls/CNC Controls/JobControl.xaml	4	0

Alongside Run / Dry Run / Check Run, the Job tab's Run dropdown now offers **Simulate**: picking it and pressing Run disconnects from whatever's currently live, connects to the bundled %AppData%\Simulator simulator, streams the loaded job there, and automatically reconnects to the original target once the job finishes, errors, or is aborted.

- **AppConfig.ConnectToSimulator** — connects straight to the bundled simulator without showing the Connect dialog and without persisting it as the new saved startup target (session-only, unlike the existing Connect/ConnectTo paths).
- **MainWindow.SwitchToSimulatorForRun / RestoreConnectionAfterSimulate** — remembers the pre-Simulate target and restores it; a failed restore is left as the normal "Not connected" state rather than a popup.
- **Cross-project hook** — CNC Controls (where the Run button lives) can't reference MainWindow directly, so the switch/restore functions are wired through two new SimulatorManager static hooks (SwitchToSimulatorForRun/RestoreConnectionAfterSimulate), the same pattern already used for AppConfig.DeviceEnumerator.
- Precondition: only works once a simulator has been built via Settings > Simulator — Run just shows a message and leaves the connection untouched otherwise.

User-verified end to end against a real controller.

#177 Program-list hover explanations were matching the wrong line; Machine/Program limits compacted to one line per axis

File	+	-
CNC Core/CNC Core/GCodeJob.cs	15	2
CNC Core/CNC Core/GCodeExplainer.cs	18	5
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	43	44
CNC Controls/CNC Controls/GCodeListControl.xaml	1	1
CNC Controls/CNC Controls/LimitsBaseControl.xaml.cs	62	3
CNC Controls/CNC Controls/LimitsBaseControl.xaml	16	13
CNC Controls/CNC Controls/LimitsControl.xaml	5	3
CNC Controls/CNC Controls/OffsetView.xaml	18	12
CNC GCodeViewer/CNC GCodeViewer/CarveView.xaml.cs	8	3
CNC Controls/CNC Controls/ActionKeyBinder.cs	7	0
ioSender XL/ioSender XL/MainWindow.xaml.cs (debug screenshot hotkey)	84	0
ioSender XL/ioSender XL/JobView.xaml	13	19
Locale/*/csv (7 locales)	58	0

A grab-bag of program-view and layout fixes from the same session:

- **Hover-explain was matching the wrong line** — the popup matched a hovered block's tokens via `GCodeToken.LineNumber == block.LineNum`, but those are two unrelated numbering schemes: `LineNum` is `ioSender`'s own sequential count, while a token's `LineNumber` comes from the file's own (author-chosen, often sparse) N-word and just carries over from the last line that had one. The two spaces can coincidentally collide anywhere in a file that mixes explicit and unnumbered lines. `GCodeBlock` now carries its own `Tokens` list, sliced directly from the exact range the parser generated for that line — no line-number matching left at all.
- **Explanation bullets now follow source word order** — the parser emits tokens in a fixed per-modal-group order, not text order, so "G90G94" was explaining G94 before G90; bullets are now sorted by where each token's own word is actually found in the line.
- **Program-list Data column** no longer starts collapsed on file load (a WPF `DataGrid` quirk where a `Width="*"` column can under-compute on a layout pass with few realized rows) and no longer has an artificial `MinWidth` floor cutting off long lines.
- **Machine/Program limits** (`LimitsBaseControl`) — one line per axis, e.g. X: [0 .. 860) mm, instead of two full-precision fields; trailing zeros dropped; bracket convention is closed at the home/zero end (always exactly reachable), open at the far/travel end (a soft-limit boundary). Also fixed a pre-existing bug where `MaxValue`'s getter read `MinValueProperty` by mistake. `UnitToggleMenu` extended to recognize the new `no-NumericField` control directly.
- **Offsets tab** gains a draggable splitter between the grid and the usage-notes panel.
- **Carve (3D) view** — front/back material contrast increased; the near-flat single-tone stock made pocket walls hard to read.
- **Debug-only screenshot hotkey** (Keyboard & Controller > UI zoom group, Debug builds only) — renders the main window to a PNG and prompts to save it under `~/Downloads/ioSenderV2/Screenshots`, filename defaulted from the active tab.

- An experimental Job-tab splitter (jog pad vs. the right-hand panel column) was tried and reverted back to the simpler Auto-sized layout after it fought the panels' own content sizing.

#178 ioSenderV2 Fusion Addin: Feeds & Speeds analysis + Batch Post Process, plus a one-click installer

File	+	-
Fusion Addin/ioSenderV2/ioSenderV2.py	113	0
Fusion Addin/ioSenderV2/batchPostProcess.py	164	96
Fusion Addin/ioSenderV2/feedsAndSpeeds.py	820	0
Fusion Addin/ioSenderV2/ioSenderV2.manifest	11	0
Fusion Addin/README.md	62	22
Fusion Addin/install-windows.ps1	35	12
Fusion Addin/install-macos.sh	11	7
CNC Core/CNC Core/FeedsSpeedsAdvisor.cs	543	0
CNC Core/CNC Core/FeedsSpeedsAiReview.cs	298	0
CNC Core/CNC Core/FeedsSpeedsExport.cs	105	0
CNC Controls/CNC Controls/FeedsAndSpeedsView.xaml	105	0
CNC Controls/CNC Controls/FeedsAndSpeedsView.xaml.cs	611	0
CNC Controls/CNC Controls/AppConfig.cs	30	0
CNC Controls/CNC Controls/LayoutModel.cs	3	2
CNC Controls/CNC Controls/ICNCView.cs	2	1
CNC Controls/CNC Controls/OffsetFlyout.xaml.cs	39	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	224	0
ioSender XL/ioSender XL/MainWindow.xaml	1	0
Locale/*/csv/CNC.Controls.WPF.resources.*.csv (7 locales)	84	0
Locale/*/csv/ioSender.resources.*.csv (7 locales)	14	0

The Fusion 360 add-in (renamed ioSenderBatchPost → ioSenderV2) now puts a single ioSenderV2 panel directly on the Manufacture workspace toolbar with two commands, instead of one button buried in the Actions panel:

- **Batch Post Process** — the existing post-every-operation-and-combine flow, unchanged, plus a new option to split output by material (grouping setups by a name-prefix convention, e.g. MDF_TopSetup) into one .nc per material instead of one combined file.
- **Feeds and Speeds** — exports every Setup/Operation's current feeds, speeds, tool and geometry data to ~/Downloads/ioSenderV2/<doc>.json as soon as it opens, and applies ioSenderV2's recommended adjustments from a companion -apply.json when you press OK. Cleans up both files on open (a stale apply file from an abandoned cycle must never silently apply) and on close (nothing lingers).

On the ioSenderV2 side, a new **Feeds & Speeds** tab (Intro / Load-Import / Results sub-tabs, each shown only when there's actually something to do there):

- A ported material chip-load/surface-speed reference table (Hardwood, Softwood, Plywood, MDF, Aluminum, Brass, Steel) cross-checked against the *connected controller's actual* grbIHAL limits (\$30 max RPM, \$110–\$112 max feed rates per axis) — a check the Fusion side could never do on its own. Each Setup's material can be derived automatically from its name, matching the same convention Batch Post Process now uses.

- An optional second-opinion AI review pass (model picker: Sonnet 5/Opus 4.8/Fable 5/Haiku 4.5), only offered when an ANTHROPIC_API_KEY is configured. Structured per-parameter responses populate an "AI Says" column and a "Prefer AI" override checkbox — never applied automatically. Cancellable mid-run (Esc/Ctrl+C), resilient to one operation's response failing, with a running transcript and live token/cost totals.
- A "Write apply file" action that archives the export + apply JSON pair into the app's logs folder, since Fusion deletes its own copies once the cycle closes.

Also new: **Help > Support > Install ioSenderV2 Fusion Addin...** symlinks Fusion's AddIns folder straight to the copy shipped alongside `ioSender.exe`, so a future ioSenderV2 update refreshes the add-in in place — no reinstall, just a Stop/Run in Fusion's Scripts and Add-Ins (which ioSenderV2 now detects and reminds you to do, if the add-in's code changed since Fusion last loaded it).

This was a full end-to-end build in a single working session, not just a features list: an interactive design pass settled the naming (`ioSenderV2 Addin`, a top-level `ioSenderV2` panel with two direct commands - not the nested dropdown the first draft produced), the decision-engine architecture (table-driven by default, an LLM pass as an optional second opinion rather than a replacement for the arithmetic), and an explicit acknowledgment that this app now has real users beyond its author - so a persisted `App.config/layout` represents someone else's data, and needs migrating forward, not silently dropped. A string of real bugs surfaced only through live testing against the actual Fusion add-in and a real CAM document, not from a clean compile:

- Fusion keeps already-imported Python modules in memory across a plain Stop/Run of the add-in - edits to `batchPostProcess.py/feedsAndSpeeds.py` silently kept running stale code until an explicit `importlib.reload()` was added, matching the pattern SRWCommands' own entry point already used for this exact reason.
- The apply-file writer serialized JSON with C#'s default PascalCase property names, while Fusion's reader expects lowercase `ops/id/set`, case-sensitively - silently produced "apply file listed no ops" despite a fully populated file, until `JsonNamingPolicy.CamelCase` was set explicitly on the writer.
- An early toolbar layout nested a dropdown labeled "ioSenderV2" inside a panel ALSO labeled "ioSenderV2" - a narrow ribbon collapsed both into their own same-named flyouts, one extra level of clicking to reach either command. Fixed by putting both commands directly on the panel, no nested dropdown.
- Adding a brand-new top-level tab to the main window needed TWO separate one-time `AppConfig` fixups, not one: the newer layout-tree structure AND the legacy flat `Config.Tabs` list, since a later reconciliation step (`TabOrder.Apply`) resyncs the tree to exactly what's in the flat list and silently drops anything that only exists in the tree - confirmed missing from both the tab bar and the "Edit Main Page" editor before this was caught.
- A model returning bare JSON `null` for one operation (instead of the requested object shape) crashed the whole review batch; the parser and per-operation loop are now resilient to any single response failing - note-and-continue rather than aborting the rest of the run.
- An AI-recommended value that matched CURRENT (not the table's own recommendation) displayed as a bare number indistinguishable from a genuine proposed change - it now reads "keep as-is, disagrees w/ table" so a considered "no change needed" opinion can't be misread as a fresh suggestion.

Built and verified against local Debug builds across the session; Fusion-side behavior verified interactively by the user against a real CAM document, including Text Commands log output, apply-file round-trips, and a live AI review run.

#179 Top-level tab reorder + Settings tab splitters and Simulator redesign

File	+	-
CNC Controls/CNC Controls/LayoutModel.cs	6	6
ioSender XL/ioSender XL/MainWindow.xaml.cs	8	8
CNC Controls/CNC Controls/GrblConfigView.xaml	30	3
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	16	12
CNC Controls/CNC Controls/SimulatorConfigView.xaml	26	5
CNC Controls/CNC Controls/SimulatorConfigView.xaml.cs	4	4
CNC Controls/CNC Controls/AppConfig.cs	1	1
ioSender XL/ioSender XL/Default-App.config	1	1

Top-level tab order changed to match how a session actually flows: **Settings, Feeds & Speeds, Start Job, Job, Offsets, SD Card, Probing, Tools, Machine Setup, Height Map, Lathe Tools** — both `LayoutModel.DefaultLayout.Build()` (the real runtime order) and `MainWindow's TabRegistry.Register` calls (kept in sync for consistency, though not itself load-bearing).

- **Settings** → **App / Jogging / G Code** were a plain `WrapPanel` that stretched its second column to fill all remaining width once a splitter was added — now a 3-column `Grid` (left panel, a real `GridSplitter`, right panel) with the right column's `ColumnDefinition` changed from `Width="*"` to `Width="Auto"` so it hugs its own content instead of stretching full-width.
- **Settings** → **Simulator** redesigned: removed a fixed `MaxWidth` that was clipping content on wide/high-DPI displays, and replaced several small status lines with one combined sentence ("Up to date with the following build options: ..." / "Will build with the following options...") at a larger, more readable font size; the built simulator's executable path moved into a read-only text box next to the Open Folder button instead of sitting on its own tiny line.
- **Prefer network if available** now defaults ON for new installs (separate small change, bundled here since it's the same Settings > App area).

Verified via Debug build + launch; `UndoLimit/searchbox` crash and `env-var` work from the same session are tracked separately.

File	+	-
CNC GCodeViewer/CNC GCodeViewer/CarveView.xaml.cs	13	6

Play_Click unconditionally called `SetToolpathVisible(false)` the instant playback started. Trail points sit at the actual (below-surface) cut Z, so before pressing Play they were buried under the flat, uncut stock top and invisible; the moment Play ran, they were removed from the scene entirely by that call — the trail was never both present in the scene AND unoccluded, in any state. Removed the hide call so the trail actually draws as the cut progresses.

- Stock top-face color lightened from (230,193,138) to (237,205,176) for better contrast against the darker cut trail (a first attempt at (214,133,100) was rejected on review — it was actually more saturated/darker than the original, not lighter).
- Cut-trail line color changed from (20,90,210) to a brighter (0,174,239).

Verified visually against a sample stock file with the color/visibility change confirmed on screen.

#181 Firmware update UI redesign + real, regex-parsed release changelog

File	+	-
CNC Controls/CNC Controls/MachineSetupWizard.xaml	9	8
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	65	56
CNC Controls/CNC Controls/FirmwareUpdateManager.cs	36	11
CNC Controls/CNC Controls/AppMessageBox.xaml.cs	25	11
CNC Core/CNC Core/AppDialogs.cs	13	7
Locale/en-US/csv (1 file)	1	1

Machine Setup's firmware panel was a cluttered mix of a version line, an update-status line and an Update Firmware button that didn't clearly say what pressing it would do. Trimmed to **Firmware version** + **Build** info and one **Check for Updates** button; the result (up to date / update available, with real changelog text) now shows in a message box with custom-labelled **Flash Firmware** / **Cancel** buttons instead of a generic Yes/No.

- **Real changelog, not hardcoded line indexing** — the previous approach sliced the release-notes text by fixed line offsets; rewritten with two Regex patterns (`DriverRefPattern`, `ChangelogPattern`) that find the `drv:<ref>@<sha>` marker and capture everything after it as the actual changelog, robust to the notes format shifting.
- **Custom message-box buttons** — `AppDialogs.Show/AppMessageBox` gained optional `yesText/noText` parameters. Buttons now carry their logical `MessageBoxResult` on `Tag` instead of being parsed back out of their (now customizable) `Content` text, which the old `Enum.Parse(Content)` approach would have broken.

Verified via Debug build + launch against Machine Setup's Machine tab.

#182 Remove env-var reliance: OBS settings, AI review key and GitHub token move into Settings/registry

File	+	-
CNC Controls Camera/CNC Controls Camera/ConfigControl.xaml	84	1
CNC Controls Camera/CNC Controls Camera/ConfigControl.xaml.cs	113	1
CNC Controls/CNC Controls/AppConfig.cs	21	0
CNC Controls/CNC Controls/BasicConfigControl.xaml	9	0
CNC Controls/CNC Controls/BasicConfigControl.xaml.cs	35	0
CNC Controls/CNC Controls/SecretPromptDialog.xaml	20	0
CNC Controls/CNC Controls/SecretPromptDialog.xaml.cs	69	0
CNC Core/CNC Core/SecretStore.cs	62	0
CNC Core/CNC Core/FeedsSpeedsAiReview.cs	20	12
CNC Controls/CNC Controls/SimulatorManager.cs	10	14
ioSender XL/ioSender XL/App.xaml.cs	38	44
build.ps1	17	8
tools/run-iosender.ps1	5	6
tools/cut-release.ps1	10	1

ioSender itself now reads **zero** environment variables - every launch-time behavior is a real CLI flag, and every persistent setting lives in Settings or the registry instead of hidden env state that made `build.ps1 -Launch` hide what was actually about to run.

- **OBS demo-recording config** (WebSocket host/port/password, camera + app-capture source/filter names) moves from `IOSENDER_OBS*/IOSENDER_OBSWS_*` env vars into a real **Settings > App > Camera > "Demo recording (OBS)"** panel, backed by new `AppConfig.CameraConfig` fields. `ObsBridge.Cameras` changed from env-var-populated-at-class-load to a `ConfigureCameras( ... )` call the app makes at startup once settings are loaded.
- **AI review key** - a new registry-backed `SecretStore` (`HKCU\Software\ioSenderV2\Secrets`) plus a minimal `SecretPromptDialog` replace the `ANTHROPIC_API_KEY` env var. Settings > App gets a "Set AI key" button that relabels itself "Update AI key" once one is stored.
- **GitHub token** for building the matched simulator is now a compiled-in, fine-grained PAT (Actions: write only, scoped to the `ioSenderV2/Simulator` repo only) instead of requiring a user-supplied `GH_TOKEN` - worst case of embedding it is CI spam on one low-value repo, not real compromise, and it means building the simulator works out of the box with no setup step.
- `-self-relaunch` and `-headless` become real CLI flags (were `IOSENDER_SELF_RELAUNCH/IOSENDER_HEADLESS` env vars); `IOSENDER_DEMOMARKER/_DEBUGLOG/_TESTSERVER` env fallbacks removed from `App.xaml.cs` entirely - CLI-only now.
- `build.ps1/run-iosender.ps1` no longer translate legacy env vars to CLI flags on your behalf - the exact command line printed is always the exact command line that ran, nothing hidden.

Built and launched via Debug across the session; the OBS panel and AI key button were interactively exercised, not just compiled.

#183 OBS "Validate" button - check WS connection and source names before a shoot

File	+	-
CNC Core/CNC Core/ObsBridge.cs	91	0
CNC Controls Camera/CNC Controls Camera/ConfigControl.xaml.cs	44	0

A typo in an OBS source name previously stayed silent until the middle of an actual recording, when nothing showed up. **Validate** connects to OBS right now with whatever's currently typed (host/port/password, not necessarily saved yet), fetches OBS's real source list, and reports which of the three configured names (Front Left / Front Right / App-screen) actually exist.

- Uses its own short-lived WebSocket connection (`ObsBridge.ValidateConnection`) - separate from the shared demo-recording connection, so validating never disturbs an already-armed recording session.
- Checks both **inputs** (`GetInputList`) and **scenes** (`GetSceneList`): the "App (screen)" capture is commonly a whole OBS Scene rather than a plain input, and checking inputs alone always reported a scene-based capture as "NOT FOUND" even when correctly named.
- Name matching is case/whitespace-insensitive, since the field is free text typed by hand to match whatever the source happens to be named in OBS - a harmless casing difference shouldn't read as "this source doesn't exist".

Verified interactively against a real OBS instance: confirmed a genuine name mismatch correctly reported NOT FOUND, and reported found once the name was corrected in OBS.

#184 AI review Cancel actually cancels - and says so immediately

File	+	-
CNC Controls/CNC Controls/FeedsAndSpeedsView.xaml.cs	16	5
CNC Core/CNC Core/FeedsSpeedsAiReview.cs	34	25

Pressing Esc/Ctrl+C during an AI review only stopped the loop from starting the *next* operation - an already-in-flight request (a real ~20-30s Anthropic API call) ran to completion regardless, with no visible sign the keypress had registered until it eventually finished. Two real gaps, both fixed:

- **The cancellation token never reached the network call.** `Task.Run(() => Review(...), token)` only honors its token before the delegate starts - once `Review`'s synchronous `HttpRequest` was already executing, cancelling had no effect on it. `Review` now accepts a `CancellationToken` and registers `req.Abort()` against it, so cancelling now genuinely interrupts a live request instead of waiting it out.
- **No feedback that the keypress landed.** The status transcript now logs "Cancelling..." the instant Esc/Ctrl+C is pressed, instead of staying silent until the (now much faster) cancellation actually completes.

Verified interactively: pressing Esc mid-review now shows "Cancelling..." immediately, followed promptly by the cancelled summary, instead of a long silent wait.

#185 Small fixes: exit-blocked explanation, Grbl search-box crash, T1M6 tooltip word order

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	14	1
CNC Controls/CNC Controls/GrblConfigControl.xaml	8	0
CNC Core/CNC Core/GCodeExplainer.cs	10	1

- **Exit blocked with no explanation** — `Window_Closing` silently refused to close the window while a job was running or paused (e.g. in Hold), leaving no indication why the X button appeared to do nothing. Now shows a message box explaining that a job is running/paused and must be stopped or finished first.
- **Grbl settings search-box crash** — typing fast enough in Settings > Grbl's search box could hit a real WPF framework bug, `InvalidOperationException: Cannot Reopen undo unit while another unit is already open`, a reentrancy issue in WPF's own undo stack when a synchronous `TextChanged` handler (re-filtering the settings tree on every keystroke) hadn't finished before the next keystroke arrived. Undo/redo was never meaningful for a search box anyway, so `UndoLimit="0"` sidesteps the buggy code path entirely rather than trying to debounce typing.
- **Tool-select hover tooltip in the wrong order** — hovering a line like T1M6 explained M6 ("Tool change") before T1 ("Select tool 1"), the reverse of how the words actually appear. Every `GCodeToken` subclass declares its own `ToString()` with `new`, not `override`, so a lookup written against the base-typed `GCodeToken` reference always resolved to the base class's own `ToString()` - harmless for token types whose `Command` enum name happens to match its raw g-code word, but `GCToolSelect`'s `Command` is the generic marker `Commands.ToolSelect` (renders as "ToolSelect", never found in the raw line), so a tool-select word always sorted last regardless of where "T1" actually sits. Fixed via dynamic dispatch to the token's real, most-derived `ToString()`.

All three verified interactively via Debug build + launch: the exit dialog now shows its message during a Hold; the search box no longer crashes on fast typing; T1M6's tooltip now reads tool-select before tool-change.

#186 Manual: "What you're looking at" breakdown for every screenshot + reshoot tooling

File	+	-
docs/manual/index.html	119	3
tools/copy-latest-screenshot.ps1	39	9
tools/gen-image-review.ps1	56	0
docs/manual/_image-review.html	30	0
docs/manual/img/*.png (4 reshoot)	0	0

Every one of the manual's 14 real app screenshots (connect dialog, Job screen, Start Job, Machine Setup, Probing, Tools, Offsets, Grbl settings, Feeds & Speeds, SD Card, 3D viewer, Height Map, Lathe wizard, Errors/alarms) now has a "What you're looking at" bullet list right under its caption, walking through every labeled control/region in plain language for a first-time reader instead of leaving the picture to speak for itself.

- Reshot four screenshots against the current 2.28 UI: Job screen (now also demonstrates the corrected T1M6 tooltip word order, [#185](#)), Grbl settings, Tools tab, and Feeds & Speeds Results.
- `tools/copy-latest-screenshot.ps1` gained `-Rank/-BatchSize`: shooting several screenshots in a row and asking for "the latest" after each one breaks once more than one new capture has landed since the last copy - `-Rank` indexes into the recent batch by age (1 = oldest of the batch, 2 = next, etc.) instead.
- New `tools/gen-image-review.ps1` + tracked `docs/manual/_image-review.html`: a quick local dark-themed gallery of every file in `docs/manual/img` with its filename and last-modified time, for eyeballing a whole reshoot batch at a glance instead of opening the full manual page by page.

Two screenshots (Lathe wizard, Errors/alarms) still show an older app build (2.0.1) and are flagged for a future reshoot; the Feeds & Speeds shot happens to show an AI review mid-cancel rather than a completed run, described honestly as such rather than staged.

#187 Firmware Check for Updates could perpetually offer a build it had already flashed

File	+	-
CNC Controls/CNC Controls/FirmwareUpdateManager.cs	9	6

Flashing the firmware update Check for Updates offered would still show the same update available afterward - not because flashing failed, but because of how the firmware CI published its release. The build-side `fw-latest` tag was a single ROLLING release, overwritten in place on every push, which turned out to have two real bugs: two close-together pushes could interleave their publish steps (the release body ending up describing a newer commit than the `.hex` asset actually attached), and re-uploading uniquely-named assets to the same release just accumulated old `.hex` files forever instead of replacing them - `FindHexAssetUrl` grabs the first `.hex` found, so a stale leftover asset could get downloaded and flashed instead of the current one.

- **Firmware CI** (stevenrwood/iMXRT1062, not in this repo) now publishes a real, immutable release per build (tag `fw-<short-sha>`, `prerelease:false`) instead of overwriting a shared tag - nothing is ever mutated in place, so neither bug class can happen again.
- **ioSender's** `FirmwareUpdateManager.GetLatestRelease` now queries GitHub's real `/releases/latest` resolution instead of a fixed `/releases/tags/fw-latest` - the exact same call shape `MainWindow.checkForUpdates_Click` already uses for the app's own updates.

Verified end-to-end: flashed the newly-published build, confirmed GitHub's `/releases/latest` resolves to it with exactly one matching asset, and confirmed a local build with this fix correctly reports up to date afterward.

#188

Configurable probe search distance on all 4 Probing tabs

File	+	-
CNC Controls Probing/CNC Controls Probing/CenterFinderControl.xaml	1	0
CNC Controls Probing/CNC Controls Probing/EdgeFinderControl.xaml	1	0
CNC Controls Probing/CNC Controls Probing/EdgeFinderIntControl.xaml	1	0
CNC Controls Probing/CNC Controls Probing/ToolLengthControl.xaml	1	0
Locale/*/csv/CNC.Controls.Probing.resources.*.csv (7 locales)	84	0

Reported ([GitHub #10](#)): probing a Tool Length Offset gave no way to shorten the probe's search distance, risking overtravel damage on a broken/ungrounded probe with no warning.

`ProbingViewModel.ProbeDistance` was already wired end-to-end - validated on input and used to build the G38.2 probe move - but was only settable via Machine Setup > Probe definitions > Edit > Motion parameters, with no control on the tab you're actually about to probe from.

- Added a "Max search distance" field (mm) directly to all 4 Probing tabs, reusing the exact wording from the existing `ProbeMotionParamsDialog` for consistency.
- `CenterFinderControl.xaml` was missing entirely from `tools/locadd.py`'s localization TARGETS list (a pre-existing gap) - added it per the project's `x:Uid` convention.

User-verified interactively on all 4 tabs.

#189 Crash fixes: null keymap load, cross-thread UI crash; console visibility restored at connect

File	+	-
CNC Core/CNC Core/KeyPressHandler.cs	3	0
CNC Core/CNC Core/HelperClasses.cs	13	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	10	0
CNC Core/CNC Core/Grbl.cs	11	4
CNC Core/CNC Core/GrblViewModel.cs	23	1
CNC Controls/CNC Controls/SDCardView.xaml.cs	7	1

- **Null keymap crash on startup** ([GitHub #12](#)) — a saved KeyMap config entry (App.config or legacy KeyMap0.xml) missing its Method element deserializes with a null method field; KeyPressHandler.ImportMappings called .StartsWith() on it with no null check, crashing every startup for an install with a stale/hand-edited keymap. Guarded.
- **Cross-thread UI crash** ([GitHub #7](#)) — ProbingViewModel.WaitForResponse (and similar helpers, plus StreamPump.Run's job-streaming thread) call into GrblViewModel directly from a worker thread, bypassing the normal Dispatcher-marshaled response path. A manually-wired UI subscriber touching a DependencyObject in response then throws "the calling thread cannot access this object" - originally reported against a since-renamed method (EmphasizeMessage → FlashMessage), same live bug either way. Fixed at the single choke point every property-change notification funnels through: ViewModelBase.OnPropertyChanged now marshals onto the UI thread when raised off it, a no-op for the normal case already on that thread.
- **Console showed nothing from the controller** ([GitHub #9](#)) — four related console-visibility gaps: a typed \$\$/\$?/\$pins command's reply was silently dropped unless "Verbose" was checked, even though typing it is an explicit request to see it; the controller's reset/boot banner could be swallowed by an internal "quiet" handshake window; the \$I "who am I" response at connect was deliberately hidden as boilerplate in an earlier change, removing the only visible confirmation a connection came up correctly; and, in the opposite direction, internal \$CWD directory-navigation traffic (checking/provisioning ATC macros against littlefs) was leaking into the console as noise whenever Verbose was on. All four addressed without reintroducing the others.

All three fixes user-verified interactively: keymap crash confirmed closed via code inspection (exact stack-trace line unchanged since v2.0.1); cross-thread fix verified via the original Probing-tab repro plus a normal job run; console fixes verified via \$\$/\$?/\$pins/\$1 replies and \$CWD noise gone during an ATC macro check.

#190 Phil Barrett's UI feedback pass

File	+	-
CNC Controls/MacroPinnedListControl.xaml	82	0
CNC Controls/MacroPinnedListControl.xaml.cs	141	0
CNC Controls/MacroCreateDialog.xaml	37	0
CNC Controls/MacroCreateDialog.xaml.cs	148	0
CNC Controls/MacroManagerDialog.xaml.cs	81	76
CNC Controls/MacroExecuteControl.xaml	2	2
CNC Controls/MacroProcessor.cs	4	0
CNC Controls/MainPanelRegistry.cs	8	2
CNC Controls/AppleStyles.xaml	12	0
CNC Controls/AppConfig.cs	4	6
CNC Controls/FeedsAndSpeedsView.xaml	10	9
CNC Controls/MachineSetupWizard.xaml	6	11
CNC Controls/JobControl.xaml	3	2
CNC Controls/OffsetView.xaml	3	3
CNC Controls/MDIControl.xaml	1	1
CNC Controls/StatusControl.xaml	3	1
CNC Controls/GrblConfigView.xaml.cs	1	0
CNC Core/GCode.cs	5	2
ioSender XL/MainWindow.xaml + .xaml.cs	33	12
ioSender XL/ProgramPanel.xaml + .xaml.cs	8	17
Locale/en-US/csv (2 files)	8	8

Phil Barrett — a long-time ioSender user, and the first person outside the project to run V2 in anger — sent a long and generous set of UI observations after his first sessions with it. This entry works through that list. His framing was that most CNC applications gain comfort from the even grid of a physical operator's panel, and that V2 was losing some of that to details.

- **Uniform button sizes.** His lead point: text-driven sizing made clusters look ragged — the Job tab's *Run* button changed width as its label cycled through Run / Dry Run / Check Run / Simulate, and sat beside a wider *Feed Hold*. Fixed widths now apply across the Job run bar, MDI *Send*, the Offsets *Clr/Get* pair and Feeds & Speeds.
- **Macros out of the flyout.** They were reachable only from the flyout sidebar, which he found hard to get to for something like a Go Home macro used many times a session. Macros now have a pinned list in the main panel and a proper *Create/Edit* dialog — name, prompt, add-to-menu, and an explicit F-key assignment in place of the automatic key allocation he rated bogus — plus an @<path> reference so a macro can live in its own .macro file instead of inline.
- **Tooltips on disabled controls.** "I prefer to see what even the greyed buttons do" — and a disabled control is precisely when you want to know why. Tooltips now appear regardless of enabled state, app-wide.
- **Loading a program was obscure.** It meant navigating to the Job panel's Program sub-panel first. *Load File* is now a main-menu item, alongside Connect.

- **Machine Setup's stray text bar.** He noticed only that tab carried a band of text between the tab rows. It has moved into the Overview tab, where it belongs.
- **The square Program button.** "I've never seen it active" — it toggled the generated g-code view and earned its keep rarely. Removed.

Also from his list, and fixed: the Reset button's square corners, which sat oddly beside a rounded Home and Unlock — unintentional rather than deliberate, and now rounded to match. Still outstanding: acknowledging V1 and Terje Io's work in the docs, and filling the wider tooltip gaps (an audit found 500+ controls without one). The bottom-mounted Program / 3D View / Console tabs were considered and deliberately left alone.

#191 Fix: dragging a tab could crash ioSender or leave the window unusable

File	+	-
CNC Controls/StretchTabControl.cs	26	4
ioSender XL/MainWindow.xaml.cs	11	0
CNC Controls/SDCardView.xaml.cs	7	0

Tabs can be dragged to reorder them. Doing so could either crash ioSender outright or leave the window looking frozen — page contents gone, the cursor stuck as a horizontal arrow, and no apparent response to input until the app was closed and restarted. Reported as [issue #17](#), present since the drag-to-reorder feature was added.

Both faults came from the same thing: the reorder rearranged the live tab list while the drag was still in progress.

- **The crash.** Moving a tab in the list makes the app select a different one *immediately*, while the dragged tab is momentarily detached — and a detached tab has no data behind it. Whichever page was activated at that instant then read data that was not there. The page shown is now left alone until the drag finishes, at which point the settled selection activates normally.
- **The stuck window.** The tab strip never claimed the mouse for the duration of the drag, so releasing the button anywhere except back over the tab strip — over the page, another panel, or outside the window — meant the drag never formally ended. The two things the drag switches on, an application-wide cursor override and the clipping that hides the page while tabs shuffle, were left switched on permanently. The app was never actually hung; it was clipped down to its tab strip. The drag now claims the mouse, and both effects are cleared unconditionally when it ends.

Ordinary clicking to change tabs is unaffected: the mouse is only claimed once a drag has genuinely started.

#192 Odd Jobs — a Work Order builder for jobs that don't deserve a CAM round-trip

File	+	-
CNC Controls/WorkOrderView.xaml.cs	1336	0
CNC Controls/WorkOrderCompiler.cs	805	0
CNC Controls/WorkOrderModel.cs	466	0
CNC Controls/WorkOrderView.xaml	208	0
CNC Controls/OddJobsFeedsSpeedsDialog.xaml + .xaml.cs	391	0
CNC Controls/OddJobsView.xaml + .xaml.cs	166	0
CNC Controls/OddJobsGeometry.cs	153	0
CNC Controls/OddJobsStockCanvas.cs	139	0
CNC Controls/OddJobsToolMemory.cs	82	0
ioSender XL/StartJobView.xaml + .xaml.cs	243	23
CNC Controls/ProgramView.xaml + .xaml.cs	122	1
CNC Controls/FixtureEditDialog.xaml.cs	103	2
CNC Controls/JobControl.xaml + .xaml.cs	72	23
macros/tc.macro	56	3
CNC Controls/StartJobConfig.cs	53	0
CNC Controls/AppConfig.cs	42	0
macros/pcorner.macro	41	12
CNC Controls/AppleStyles.xaml	40	0
CNC Controls/NumericField.xaml + .xaml.cs	39	7
CNC Controls/MacroProcessor.cs	34	5
CNC Controls/TabKeyBinder.cs	34	2
ioSender XL/MainWindow.xaml.cs	24	4
CNC Controls/StretchTabControl.cs	20	0
CNC Core/GCodeJob.cs	12	3
CNC Controls/SignalControl.xaml.cs	12	2
CNC Controls/KeyMapEditor.xaml.cs	10	0
CNC Core/GrblViewModel.cs + Grbl.cs	12	0
CNC Controls/LayoutModel.cs	8	1
CNC Controls/StepperCalibrationProbeWizard.xaml.cs	6	1
ioSender XL/App.xaml.cs	6	0
CNC Controls/ICNCView.cs	2	1
XAML x:Uid / style touch-ups (7 files)	8	7
Locale/*/csv (7 locales, 2 files each)	1659	28

The idea came from Phil Barrett, who said in passing that ioSender could use a *workbench* tab — somewhere to machine a hole or a pocket without going out to CAD/CAM and back for a job that takes two minutes at the machine. This is that tab.

Odd Jobs has two sub-tabs. **Setup** is the familiar Start Job flow, constrained to the G59 fixture, so the stock is measured and the origin and tool length reference are established the usual way. **Work Order** is where the job is described.

- **Geometry belongs to the toolpath; operations act on it.** Add a toolpath — line, circle, oval, square or rectangle — then add operations under it: pocket, contour, drill, bore, side finish, bottom finish, chamfer. That split is why nothing needs a special case: a counterbore is one circle carrying a shallow bore, a through drill and a chamfer, all on one centreline, and the compiler knows the recess is already open so the drill rapids through it.
- **One program, not a pile of them.** *Generate* compiles every enabled row into a single g-code program, with per-row enable checkboxes for partial runs (ticking a toolpath cascades to its operations, and back).
- **Tool order is chosen, not stumbled into.** Ordering the work by tree position stranded a tool — a drill wedged between two chamfers meant loading the chamfer tool twice. Each candidate is now scored by simulating it to completion and counting the operations that would still need it, preferring a tool that won't have to be revisited.
- **No redundant tool changes.** The compiler tracks what is already in the spindle, so a job with fifteen sections and five real tool changes now does five — not fifteen park/prompt/re-probe cycles.
- **Feeds and speeds are advised, not invented.** A dialog proposes chipload-based numbers per tool and material, and the tab remembers what was actually used.

There is no completion gate. An earlier build made you certify the setup before generating, its own watches false-positived, and it was simply annoying — it is replaced by one Yes/No at *Generate*: this is built on the cached G59 origin and tool length reference, proceed?

Tool numbers are preassigned from the Feeds & Speeds list position, and **T8 is reserved** — `tc.macro` uses it as the “3D probe already fitted” sentinel, so the numbering runs T1–T7, T9, T10. This machine runs grblHAL with `N_TOOLS 0`, i.e. no controller-side tool table, so a T-number means only what the macros make it mean. Cut so far in plywood and MDF only; feeds for other materials are untested advisor numbers. Hardware verification of bore clearing, counterbore→through-drill on one centreline, tabs on the last op to depth and patterned bolt circles is still in progress.

#193 Work Order promoted to its own tab; Setup gains conductive-material rules and touch-plate TLO support

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	22	0
CNC Controls/CNC Controls/ICNCView.cs	1	1
CNC Controls/CNC Controls/LayoutModel.cs	11	5
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	24	1
CNC Controls/CNC Controls/OddJobsSettingsControl.xaml	1	1
CNC Controls/CNC Controls/OddJobsView.xaml	0	12
CNC Controls/CNC Controls/OddJobsView.xaml.cs	0	153
CNC Controls/CNC Controls/KeyMapEditor.xaml.cs	1	1
CNC Controls/CNC Controls/LibStrings.xaml	1	0
ioSender XL/ioSender XL/MainWindow.xaml	4	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	23	2
ioSender XL/ioSender XL/StartJobView.xaml	6	4
ioSender XL/ioSender XL/StartJobView.xaml.cs	26	12
CNC Controls/CNC Controls/StartJobConfig.cs	2	2
CNC Core/CNC Core/FeedsSpeedsAdvisor.cs	4	0
CNC Controls/CNC Controls/AtcMacros.cs	35	9
ioSender XL/ioSender XL/App.xaml.cs	8	0
macros/tc.macro	40	15
CNC Controls Probing/Resources/Center0.png, centerI.png (redrawn)	0	0
Locale/*/csv (14 files, 7 locales)	42	0

Continues the Job/Setup/Odd-Jobs flow redesign: the Work Order composer is now a top-level tab in its own right (Odd Jobs' shell, which only ever hosted this one sub-tab, is retired), Setup's probing rules now follow the selected stock Material, and the ATC tool-change macro can use a fixed touch-plate block for tool-length reference instead of a dedicated toolsetter.

- **Work Order tab** - promoted from an Odd Jobs sub-tab to a top-level tab; "New Work Order..." / "Load Work Order..." main menu items added (same idea as Load File) alongside its existing toolbar buttons. An existing saved layout's tab order is preserved by a one-time migration.
- **Conductive-material probing rules** - the "Stock conductive" checkbox is gone; conductivity is now read from the selected Material (Aluminum/Brass/Steel are conductive, wood-based materials aren't). Touch Plate probing of Internal or External-Is-Circle geometry on non-conductive stock shows a warning instead of a hard block, since a custom-shaped plate can still reach those points.
- **Touch-plate TLO block** - tc.macro can now use a fixed block in place of a toolsetter puck (new # <_tc_touchplate> flag): every tool probes the fixed position via the main probe input instead of switching to a dedicated toolsetter input. The TLO math is unaffected since it was already purely differential.
- **Setup Geometry preview images** - the Is-Circle preview images were redrawn to match the External/Internal picker's thin-line style (the first pass had a heavy dark-filled circle and thick arrows that didn't match).

Debug build verified after each change; touch-plate TLO path awaiting a hardware test pass.

#194 Work Order runs from the Job tab; Load File performance

File	+	-
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	116	23
CNC Controls/CNC Controls/GCode.cs	96	26
CNC Core/CNC Core/GCodeJob.cs	65	1
CNC Core/CNC Core/BulkObservableCollection.cs	66	0
CNC Controls/CNC Controls/ProgramView.xaml.cs	32	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	21	0
CNC Controls/CNC Controls/GCodeListControl.xaml.cs	15	0
CNC Controls/CNC Controls/MacroProcessor.cs	10	0
CNC Controls/CNC Controls/WorkOrderView.xaml	4	11
CNC Controls/CNC Controls/ProgramView.xaml	4	0
CNC Controls/CNC Controls/AppConfig.cs	4	0
Locale/*/csv (7 locales)	7	42

Work Order's Run button now hands its generated program to the Job tab as the actual loaded job, not a floating preview overlay - it shows in the Job tab's real docked program list (the same one a loaded .nc file uses), streams through the existing run pipeline, and pops back to whatever was loaded before once the run ends (or is stopped, or a prerequisite check fails), switching the operator back to the Work Order tab.

- **GCode.File.Push()/Pop()** - a real push/pop against the loaded job. Push snapshots the current program (in memory, not a filename to re-read); LoadText loads generated G-code through the same completion pipeline Load File uses; Pop restores the snapshot.
- **ProgramView** gained a Source (File/Generated) and an Edit button that jumps back to the source tab for a generated program's own preview.
- **Load File performance** - parsing now writes into a private buffer instead of the live, DataGrid-bound collection, and binds once via a new BulkObservableCollection (a single Reset notification instead of one per line). Fixes a real UI freeze restoring a large loaded job (confirmed "Not Responding" on a 220k-line file); the originally-reported Load File slowness itself timed out at ~44s of pure parsing, not binding.

Built and tested on real hardware across several iterations this session; Load File's own parse-time cost (not binding) is a separate, not-yet-started investigation.

#195 Work Order: 4-flute chamfer bit, Climb/Conventional cut direction, spindle-direction setting

File	+	-
CNC Core/CNC Core/RotatingFileStore.cs	118	0
CNC Core/CNC Core/LogFile.cs	19	76
CNC Core/CNC Core/ConsoleLog.cs	7	6
CNC Core/CNC Core/DebugLog.cs	6	4
CNC Core/CNC Core/Grbl.cs	20	40
ioSender XL/ioSender XL/App.xaml.cs	7	5
CNC Controls/CNC Controls/FeedsAndSpeedsView.xaml.cs	13	12
CNC Controls/CNC Controls/AppConfig.cs	23	13
CNC Controls/CNC Controls/WorkOrderModel.cs	24	0
CNC Controls/CNC Controls/WorkOrderCompiler.cs	74	10
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	7	1
CNC Controls/CNC Controls/OddJobsFeedsSpeedsDialog.xaml.cs	24	5
CNC Controls/CNC Controls/OddJobsFeedsSpeedsDialog.xaml	9	0
CNC Controls/CNC Controls/OddJobsSettingsControl.xaml.cs	15	0
CNC Controls/CNC Controls/OddJobsSettingsControl.xaml	9	0
CNC Controls/CNC Controls/SpindleControl.xaml.cs	21	1
Locale/*/csv (7 locales)	28	0

Follow-on fit-and-finish for the Work Order tab, plus a shared file-rotation scheme for logs and backups that had each been reimplementing their own ad hoc retention.

- **4-flute chamfer bit** - a dedicated 1/4" 90° chamfer bit alongside the existing V-bit, same cone geometry for feeds/speeds and TOOL declarations.
- **Climb/Conventional cut direction** - a per-operation choice on the Feeds and Speeds dialog, defaulting to Conventional. Climb/Conventional isn't a fixed CW-or-CCW answer: it flips depending on whether the feature is internal (a bore/pocket, where climb orbits the SAME direction as the spindle) or external (a Contour cutting a part free, where climb orbits OPPOSITE it) - WorkOrderCompiler now derives the correct raw arc/winding direction per operation instead of hardcoding one.
- **Spindle-direction-capability setting** (Settings:App > Work Order) - for a spindle/VFD that can only physically run one direction regardless of the M3/M4 label (found on real hardware: grblHAL's own capability report said reversible, the VFD's documented behavior says otherwise). WorkOrderCompiler's direction math accounts for it, and the Job tab's Spindle panel now hides whichever of CW/CCW can't actually run.
- **Fixed a real crash** - the Spindle panel's RPM field threw a NullReferenceException on Enter (its key handler cast the wrong control type).
- **Shared day-of-week log/backup rotation** - new RotatingFileStore generalizes the scheme the console/debug/crash logs already used (a fresh timestamped file per run inside a logs\
<DayOfWeek>\ folder, capped and pruned per folder, with a latest_* alias at the top level) to

App.config/Grbl settings backups and the Feeds & Speeds Fusion-archive copies, replacing several flat, unbounded-growth folders.

Debug build verified after each change; the new Work Order direction/tool options and the spindle-direction setting have not yet had a real-hardware cutting test pass.

#196 Fix: Setup's cold-session crash, and Work Order Run's live status now shows in the real Job tab list

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	26	19
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	15	5
ioSender XL/ioSender XL/MainWindow.xaml.cs	30	12
ioSender XL/ioSender XL/StartJobView.xaml.cs	20	6
macros/tc.macro	9	2

Two real bugs found and fixed the same session while sourcing manual screenshots for the job-flow redesign (#190–195) and driving it on real hardware for the first time end to end.

- **Cold-session crash fixed.** `#<_tlo_ref>` is only ever assigned by a prior `tc.macro/Setup` run — on a genuinely fresh session (first-ever run, or right after a firmware/NVS reset) it's undefined, and Setup's TLO-baseline save (`#<_tlo_saved> = #<_tlo_ref>`) errored reading it (grblHAL error 2), confirmed on real hardware. A first attempt guarded the read with an `EXISTS[]`-checked O-word `IF/ELSE/ENDIF` block — which uncovered a second, worse bug: `ioSender`'s own G-code streaming pipeline (`GCode.AddBlock`, used by every `RunStreamedJobInPlace` burst) silently drops bare O-word `ELSE/ENDIF`-only lines, leaving the controller's o-word engine waiting for a matching `ENDIF` that never arrives — it kept accepting and acking every subsequent line, including real motion commands, without ever queuing them, until a reboot cleared the stuck state. Reverted that approach entirely: Setup's two program builders (`BuildProgram/BuildViseProgram`) now decide whether to preserve or reset `#<_tlo_ref>` in C#, via the controller's own \$TLR-backed `IsTloReferenceSet` flag, so the streamed program never contains O-word branching at all. `tc.macro`'s own `o199/o200` guard is unaffected — it's uploaded as a raw file (YModem), never tokenized through the same pipeline.
- **Work Order's live run status now shows where you're actually looking.** Found chasing a Work Order screenshot: Run's live per-line status (`ok/*`) was showing in a separate floating panel, not the real docked Job-tab program list, whose status column just sat dead. Root cause: `MacroProcessor.Run`'s shared streaming pipeline deliberately never writes into the loaded job, by design, for every other macro caller (Setup, calibration, fixture tools) — a run must never silently hijack the Job tab. Work Order is the one legitimate exception (it already made itself the loaded job via `GCode.File.Push()/LoadText()` before streaming), so it now opts in via a new `bool preferJobView` parameter threaded through `Run→Flush→StreamProgram→RunStreamedJobInPlace` (default `false` everywhere else). When set, the sanitized burst is built directly into `GCode.File` instead of a disconnected transient copy, so `ProgramPanel`'s own docked list — permanently bound to `GCode.File.Data` — gets the live writes for free, with no separate view or redirect needed. `GCode.File.Push()/Pop()` is unaffected; the extra in-place rebuild happens inside the already-pushed slot.
- **Removed a dead Edit button.** Work Order's Generate-preview panel carried an Edit button (`ProgramView.EditTargetTab`) that switched to the Work Order tab — but Generate can only ever fire while already on that tab, so it was a permanent no-op. Dropped for Work Order; the generic mechanism stays in `ProgramView` for a future tool that might actually need it.

Confirmed on real hardware: the cold-session crash is fixed (reboot + fresh Setup run completes), and Work Order's docked-live status is fixed (verified via manual screenshot capture, no floating panel, hover-tooltip explain still works). Debug

build clean throughout.

#197 Stepper calibration and squareness folded into Machine Setup → Calibration

File	+	-
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	69	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml	20	2
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml.cs	0	628
CNC Controls/CNC Controls/StepperCalibrationWizard.xaml.cs	0	247
CNC Controls/CNC Controls/StepperCalibrationWizard.xaml	0	127
CNC Controls/CNC Controls/StepperCalibrationScratchWizard.xaml	0	117
CNC Controls/CNC Controls/ToolsView.xaml.cs	0	2
Locale/*/csv (7 locales)	161	0

Stepper calibration used to live in two separate top-level wizards — one driven from a measured cut, one from a scratch test — reached from the Tools tab, entirely disconnected from the rest of commissioning. Both are deleted. Calibration is now a **step inside Machine Setup**, in the same guided sequence as homing, soft limits, squareness and the TLO reference, so a machine gets set up in one pass instead of by remembering which wizard lives where.

- **One place, one order.** Calibration sits with squareness in Machine Setup → Calibration; both are steps in the wizard rather than destinations you have to go find.
- **1,119 lines of wizard deleted.** The two standalone wizards duplicated a lot of the probe/measure/apply plumbing that Machine Setup already had; folding them in removed the duplicate rather than porting it.
- **Tools tab keeps shrinking.** Another two registrations gone from ToolsView — the tab is progressively emptying out as its contents move to where they are actually used.

Machine Setup Calibration step verified on real hardware.

#198 Spoilboard surfacing becomes a Work Order Surface toolpath

File	+	-
CNC Controls/CNC Controls/WorkOrderCompiler.cs	187	6
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	63	11
CNC Controls/CNC Controls/WorkOrderModel.cs	34	4
CNC Core/CNC Core/FeedsSpeedsAdvisor.cs	19	7
CNC Controls/CNC Controls/WorkOrderView.xaml	6	0

Surfacing the spoilboard was its own wizard, with its own stock/origin assumptions, sitting outside the Work Order flow that every other job goes through. It is now a **Surface toolpath** you add to a work order like any other operation — same tool list, same feeds and speeds advisor, same generate/run path, same dry run.

- **Entire Spoilboard** is a checkbox on the toolpath rather than a separate mode. It deliberately does not trust the work order's WCS at all: it touches off its own fresh Z0 and works in machine coordinates, because the point of resurfacing is that the board is *not* where you last thought it was.
- **A scratch WCS slot** is chosen and restored around the operation, so surfacing can establish its own origin without stepping on the work order's own coordinate system.
- **Feeds and speeds** for a surfacing cutter come from the same advisor as everything else, instead of the wizard's separate hardcoded defaults.

Surface toolpath, including Entire Spoilboard, verified on real hardware.

#199 User-addable custom tools, seeded from config instead of a hardcoded enum

File	+	-
CNC Controls/CNC Controls/OddJobsFeedsSpeedsDialog.xaml.cs	206	235
CNC Controls/CNC Controls/OddJobsSettingsControl.xaml.cs	165	78
ioSender XL/ioSender XL/Default-App.config	114	0
CNC Controls/CNC Controls/AppConfig.cs	54	6
CNC Controls/CNC Controls/CustomTool.cs	100	18
CNC Controls/CNC Controls/WorkOrderModel.cs	82	2
CNC Controls/CNC Controls/CustomToolEditDialog.xaml.cs	72	0
CNC Controls/CNC Controls/ConfigStore.cs	51	3
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	42	48
CNC Controls/CNC Controls/CustomToolEditDialog.xaml	35	0
CNC Controls/CNC Controls/OddJobsToolMemory.cs	6	6

The tools a work order could use were a hardcoded enum, so adding a cutter meant editing and rebuilding the app. They are now a single **editable list seeded from Default-App.config**, with an add/edit dialog — your own tools sit alongside the built-ins and behave identically.

- **Operations self-describe.** Each operation carries its own ToolName rather than pointing at an enum ordinal, so a work order stays readable even if the tool list changes underneath it.
- **Stale Ids self-heal.** A work order saved against a tool that has since moved reconciles on load instead of silently binding to the wrong cutter — the built-in Ids 0–13 keep their old ordinals precisely so existing saved work orders still resolve.
- **Config promotion, not a migration.** The seed list arrives through the existing template-fallback mechanism, so an install that has never seen custom tools picks them up without a migration step.

Verified against existing saved work orders on this install.

#200 App.config / Default-App.config processing on first run after an install

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	64	3
CNC Controls/CNC Controls/ConfigStore.cs	51	3

Two related problems in how settings are loaded the first time a build runs against an existing install — both confirmed as real failures, not hypotheticals.

- **A missing section fell back to the bare C# field initializer.** A section the user's own App.config has never contained — because it is new in this build — now falls back to the **shipped Default-App.config template's curated value** instead, after first trying any real legacy data. The difference matters: the template is a considered starting configuration, the field initializer is whatever = new() happened to produce.
- **One bad section took out every section after it.** ConfigStore.ReadDocument now isolates each section's Read() in its own try/catch. Previously a single section holding data a newer build no longer recognised threw, and every section registered *after* it silently never loaded. Confirmed case: a custom Work Order tool persisted with Kind="Mill", from before that value was split into EndMill/OFlute/BallEnd/Surfacing.
- **Failures are visible.** A section that fails to read is left at its owner's default and reported through a startup dialog plus ConsoleLog — the old behaviour discarded the data with no indication anything had gone wrong.

Matters more than it used to: ioSender V2 now has real users beyond its author, so saved installs cannot be silently broken.

#201 Fix batch: unhomed Go To, Work Order park height, dry run, alarm aborts, jog pad targets

File	+	-
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	105	6
CNC Controls/CNC Controls/WorkOrderCompiler.cs	92	23
CNC Controls/CNC Controls/MacroProcessor.cs	79	7
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	75	32
CNC Controls/CNC Controls/UIUtils.cs	74	1
CNC Controls/CNC Controls/JogBaseControl.xaml	61	11
CNC Controls/CNC Controls/JobControl.xaml.cs	41	16
CNC Controls/CNC Controls/GotoBaseControl.xaml.cs	35	0
CNC Controls/CNC Controls/StreamPump.cs	23	4
ioSender XL/ioSender XL/MainWindow.xaml.cs	20	0
CNC Core/CNC Core/GrblViewModel.cs	10	0
CNC Controls/CNC Controls/NumericTextBox.cs	6	4
CNC Controls/CNC Controls/LayoutModel.cs	6	2
CNC Controls/CNC Controls/WorkOrderView.xaml	5	1

A batch of fixes found by running work orders end to end on real hardware. Several turn out to be the same mistake in different places: **trusting a value in the wrong reference frame**.

- **Go To refuses to run unhomed.** Every Go To is a machine-coordinate move, so it is only as good as the machine-coordinate reference. After an unexpected controller reboot grblHAL came back *Idle* — not *Alarm* — with `MPos:0,0,0` at wherever the tool happened to be; a G30 then chased the stored coordinates as a blind displacement from a false zero and rapided into the hard stops, stalling three steppers. Soft limits are no backstop, as they are only enforced when homed. The guard lives in the shared `SafeGoto` routines, because a missing button-level guard on the offset flyout is exactly what let this through.
- **Work Order park and opening retract are machine-referenced.** Both ends of a generated program used `G0 Z{SafeZ}`, treating a *work-Z* height as if it were a machine height. From a G30 park that opening "retract" was a ~90 mm plunge; at the end it traversed the whole table ~93 mm below machine top. Both now go through the shared `EmitGotoG30` idiom.
- **Dry Run actually protects again.** `MacroProcessor.Run` silently ignored Dry Run mode, so a work order run in dry run could still fire the spindle for real. The neutralization also ran twice on the normal path; it is now scoped to the callers that need it.
- **Alarms always abort the stream.** A tab-gated abort left the pump stuck active after an alarm raised on a non-Job tab, silently swallowing every later response including jog acks. Macro alarm-abort now latches an event counter rather than sampling current state, closing a race where a fast manual Reset let a macro continue past an alarm it never saw.
- **Jog pad targets the machine, not the job.** The centre button always targets the machine envelope instead of the loaded program's bounding box, and four corner buttons (20 mm holdback) were added.

- **Work Order tab UX.** Unsaved-changes prompting, right-click opening the correct menu, Tab no longer escaping the panel, Generate saving first, name-field select-all, and fractional input such as $1 \frac{1}{8}$ ".

All verified on real hardware — the work order that exposed most of them now drills all 12 dimples clean.

#202 Touch-plate offsets no longer gated on stock conductivity; Work Order picks its own WCS

File	+	-
ioSender XL/ioSender XL/StartJobView.xaml.cs	26	13
CNC Controls/CNC Controls/WorkOrderView.xaml.cs	41	13
CNC Controls/CNC Controls/WorkOrderModel.cs	18	6
CNC Controls/CNC Controls/WorkOrderView.xaml	13	0

Two independent fixes that both came out of running a work order end to end on the machine.

- **Touch-plate compensation was gated on stock conductivity.** Plate thickness and lip offsets applied only when `touchPlate && !stockConductive`. That is the wrong test: the circuit for a touch-plate probe closes between the *bit* and the *plate*, both metal, and never through the stock underneath — so what the stock is made of has no bearing on whether a plate was physically used. Probing conductive stock *with* a real plate is an ordinary workflow (thin aluminium sheet, too thin for a reliable direct stylus touch), and it silently produced zero compensation. Confirmed on real hardware: work Z0 landed exactly one plate thickness (12 mm) high, and X/Y landed on the plate's own lip edge instead of the stock's. Now driven by whether a touch plate was actually selected, in all three program generators. Stock conductivity still drives the reliability warning it was always meant to drive.
- **A work order chooses its own coordinate system.** The compiler hardcoded G59. A work order now carries a WCS field: *Follow Setup* resolves live at generate time, or it can be pinned to G54–G59. Setup is shared with the plain Start Job tab, so its live selection is not something a saved work order can treat as a stable reference.
- **Entire Spoilboard no longer writes to the wrong slot.** It emitted G10 L20 P1 Z0 regardless of which scratch WCS it had actually chosen — which could have overwritten a real G54 origin when the work order's own WCS was G54.

Z error dropped from 12 mm to within 1–2 mm on retest; the remainder was a stale machine-wide TLO reference, recalibrated separately.

#203 Feed rate readout stops clipping; run bar shows its unit in the tooltip

File	+	-
CNC Controls/CNC Controls/FeedControl.xaml	10	2
CNC Controls/CNC Controls/FeedControl.xaml.cs	1	1
ioSender XL/ioSender XL/MainWindow.xaml	13	2
Locale/*/csv (7 locales)	7	0

Reported against V2.32: the *Feed rate* panel's readout only showed about two digits. The box was a hard `Width="50"` with its unit label absolutely positioned beside it, and once the control style's 8px horizontal padding and 1px border came out of that only ~32px of text area was left -

`Format="####0"` renders five digits but they had nowhere to go and clipped.

- **Readout and unit share a layout panel** now instead of the label being pinned at a fixed offset, and the box has a minimum width sized for the digits it can actually produce - growing rather than clipping beyond that.
- **Run bar drops the static unit label.** On that bar the room is better spent on digits, so the unit moved into a tooltip covering the whole *Feed:* group. The wording lives in a localizable run rather than a binding format string, so it translates like every other tooltip.

The tooling that generates locale rows learned inline runs at the same time, which backfilled rows for several probing descriptions that had been silently English-only.

#204 Tools tab holds only the hardware-gated tools, and hides when none apply

File	+	-
CNC Controls/CNC Controls/ToolsView.xaml.cs	34	21
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml.cs	0	611
CNC Controls/CNC Controls/SurfaceSpoilboardWizard.xaml	0	97
CNC Controls/CNC Controls/LayoutModel.cs	12	9
CNC Controls/CNC Controls/AppConfig.cs	15	8
CNC Controls/CNC Controls/LibStrings.xaml	0	9
CNC Controls/CNC Controls/KeyMapEditor.xaml.cs	0	2
ioSender XL/ioSender XL/MainWindow.xaml.cs	3	1
ioSender XL/ioSender XL/JobView.xaml.cs	3	2
Locale/*/csv (7 locales)	0	336

Three of the six things the Tools tab registered had already moved elsewhere and were pure duplication: **Stepper calibration (probe)** and **Squareness** live in Machine Setup's Calibration step, and **Surface spoilboard** became a Work Order Surface toolpath. All three are deregistered, and the standalone spoilboard wizard is deleted now that the Work Order toolpath - including Entire Spoilboard - fully replaces it.

- **What remains is Tool table, Trinamic tuner and PID tuner**, none of which moved anywhere, and all three of which were already gated on the controller actually having a tool table / TMC drivers / a PID log.
- **The tab now gates itself on its own children** rather than re-testing their prerequisites, and loses its always-visible flag - so the existing connect-time prune drops the whole tab on a controller that supports none of them, and keeps it with just the relevant sub-tabs on one that does.
- **Persisted layouts are migrated**: the retired components join the one-time Tools-slot fixup, so an existing profile has them stripped rather than carrying dead entries.

Also swept 336 locale rows orphaned by the deleted wizard, and renamed the internal tab-identity value that Work Order had quietly inherited from it.

#205 Rapid single-step jogging can no longer wedge the controller

File	+	-
CNC Core/CNC Core/JogGate.cs	78	0
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	16	41
CNC Core/CNC Core/ControllerMapper.cs	8	0
CNC Core/CNC Core/GrblViewModel.cs	11	1
CNC Controls/CNC Controls/JobControl.xaml.cs	9	0

Sending a second jog before the first has been acknowledged can wedge the controller completely - no response to anything, including a bare `$I`, until a power cycle. A guard against that already existed, and had two holes.

- **The Xbox controller was never covered.** The guard was private to the on-screen jog panels; the gamepad's D-pad builds and sends its own jog line, so rapid presses reproduced the original wedge unmitigated. The guard now lives in the core alongside everything else that talks to the machine, and both inputs share it.
- **It could never be acknowledged while jogging.** Responses were suppressed for the whole time the controller reported the Jog state - but the first jog puts it in that state, so that jog's acknowledgement and every later one was swallowed. The guard then fell through to its timeout and eventually emitted an unacknowledged jog anyway: exactly what it exists to prevent, just slower. That also explains why only *rapid* jogging triggered it - jog slowly enough to fall back to idle between moves and the acknowledgement arrived normally.

Responses are delivered unconditionally now, with the Jog filter moved to the one consumer that needed it - the job streamer's acknowledgement accounting, where a stray jog response would otherwise be counted against an outstanding command.

Analog stick jogging deliberately stays outside the guard - overlapping sends are how that loop achieves continuous motion.

#206 Fixture definition dialog: keeps its probe choice, offers where you are standing, stops minimizing the app

File	+	-
CNC Controls/CNC Controls/FixtureEditDialog.xaml.cs	119	28
CNC Controls/CNC Controls/Fixture.cs	12	1
CNC Controls/CNC Controls/UIUtils.cs	29	0
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	3	0

- **Test position offers the current machine position.** Test rapids to the *saved* position before probing, so jogging closer and pressing Test silently undid the jog and re-ran the identical failing probe - which is precisely what the failed-search recovery was telling the operator to do. Test now compares live against saved and, past a small tolerance, asks; the default adopts where the machine actually is, exactly as Set position would. Nothing moves until that is answered.
- **The recovery prompt loses an auto-retry that could never fire.** It asked the operator to jog closer and click OK, but it is a modal dialog - the jog pad is dead while it is up, so the position comparison on the way out always saw no change. It now just explains the failure and points at Test, which handles it.
- **The probe selection is remembered per fixture.** The 3D Probe / Touch Plate radio reset on every open, so reopening a touch-plate fixture silently ran the next Set/Test with 3D-probe geometry - plate thickness and lip offset dropped - until the operator noticed. A new fixture with nothing to restore now defaults by which probes are actually defined, rather than always landing on 3D Probe even on a machine that has none.
- **Closing the dialog no longer minimizes the main window**, a side effect of it being non-modal so that jogging stays reachable while it is open.

Existing fixture definitions are unaffected - the stored probe type is absent from an older file and defaults to what those fixtures already do.

#207 Setup runs without the multi-second stalls; ATC macro update no longer needs a restart

File	+	-
CNC Controls/CNC Controls/MacroProcessor.cs	38	4
CNC Core/CNC Core/YModem.cs	26	11
CNC Controls/CNC Controls/SDCardView.xaml.cs	63	41
CNC Controls/CNC Controls/AtcMacros.cs	13	1
CNC Controls/CNC Controls/TrinamicView.xaml.cs	22	14
macros/pcorner.macro	9	1
ioSender XL/ioSender XL/StartJobView.xaml.cs	3	1

- **Each hold-for-idle gate cost two seconds of nothing.** The wait allowed time to observe motion *starting* before it could trust an idle report - but only a controller-side SD job acknowledges first and moves later; an ordinary burst has already finished moving by the time the gate is reached. The long allowance is now scoped to macros that actually start such a job. A Setup program passes three of these gates.
- **A redundant lift after the tool-length reference** descended to the park position only to climb straight back to machine top.
- **Corner probe retreats drop from 20mm to 5mm.** Twenty is far more than any real bed variance - on a T-slot extrusion bed even five would take some doing - so it just spent Z travel on every retreat between faces.
- **The macro upload could hang the app outright.** The per-packet wait had no guard against its worker faulting, which left the interface spinning with no way out - reliably reproduced against the largest of the macro files. It now fails cleanly and reports a failed transfer instead.
- **A stuck internal flag survived until restart.** The flag that reroutes controller responses during a file read was cleared only on the success path, so one fault left the app misreading everything the controller said for the rest of the session - the cause of the long-standing 'exit and restart, then it works first time' behaviour when updating the ATC macros. It is now restored unconditionally, in all four places that set it.

The retreat clearance is a fixed value rather than a caller-supplied one: reading a parameter no caller had set aborted the run with an expression error.

#208 Settings and Machine Setup: a searchable index replaces the tab strips

File	+	-
CNC Controls/SettingsNavShell.xaml.cs	329	0
CNC Controls/SettingsNavShell.xaml	89	0
CNC Controls/SettingsNavNode.cs	221	0
CNC Controls/SettingsSearchIndex.cs	132	0
CNC Controls/NullToVisibilityConverter.cs	27	0
CNC Controls/ToolTipTextTemplateSelector.cs	28	0
CNC Controls/GrblConfigView.xaml(.cs)	279	243
CNC Controls/MachineSetupWizard.xaml(.cs)	132	16
CNC Controls/MachineSetupView.xaml(.cs)	91	9
CNC Controls/MainPageEditor.xaml(.cs)	75	7
CNC Controls/KeyMapEditor.xaml(.cs)	39	7
CNC Controls Camera/ConfigControl.xaml(.cs)	38	2
CNC Controls/SettingsPanelRegistry.cs	74	1
Config panels declaring their own placement (8 panels)	41	9
CNC Controls/AppConfig.cs	12	0
ioSender XL/App.xaml	25	0
CNC Core/LibStrings.xaml	16	1
Locale/*/csv (7 locales)	140	14

Settings and Machine Setup were top-level tabs whose contents were themselves tab strips - about twenty destinations across two of them, and Machine Setup's Calibration step nested a third tab strip inside the second. Tabs stopped scaling: they compete for horizontal space, offer no grouping, and cannot be searched. Both now use one shared shell - a searchable category tree on the left, the selected page on the right, with the existing Save / Restart / Reset footer beneath.

Every config panel is its own page. The App, Jogging and G Code tabs used to cram unrelated panels into two or three columns because there was nowhere else to put them; that cramming is gone. Camera splits further into *Camera* and *Demo recording (OBS)*. Machine Setup keeps its numbered steps and its green/orange/red grading, now shown as a status dot beside each step.

Search matches the words on the page, not just page names - "backlash" finds Axis information, "OBS" finds Demo recording - with a match count, and a tooltip explaining any hit you cannot see on the page (much of the useful text lives in tooltips, so a match can read as wrong until it says *Matched tooltip: ...*). The index is built by walking the logical tree, so it never has to open a page: opening a Machine Setup step queries the controller's filesystem, and indexing must never talk to the machine.

Page labels are read from each panel's own already-localized group header, so they are correct in all seven languages without a single new string. Placement moved onto the panels themselves, retiring the hardcoded table in the settings host that had to match panels in other assemblies by full type name - a feature can now contribute a settings page without the host knowing it exists.

The Grbl page deliberately keeps its own group tree and \$-search: that is live controller data, fetched on connect and absent entirely on classic grbl, so lifting it into the navigation tree would have made

the tree change shape whenever the machine connected.

Sub-tab keyboard shortcuts are dropped - the badge and right-click bind menu lived on tab headers that no longer exist - and any already saved are removed on load. **Top-level tab shortcuts are unaffected.**

Prompted by this work, long tooltips now wrap at a sensible width app-wide instead of running off as one line, and sit clear of the mouse pointer: WPF places them assuming a standard cursor, so an extra-large Windows pointer covered the first few characters.

#209 Settings search names the control a matched tooltip belongs to

File	+	-
CNC Controls/CNC Controls/SettingsSearchIndex.cs	72	6
CNC Controls/CNC Controls/SettingsNavShell.xaml.cs	52	9
CNC Controls/CNC Controls/SettingsNavNode.cs	1	1

The navigation tree's search ([#208](#)) already told you *why* a page matched — *Matched text* or *Matched tooltip*, quoting the words it hit. A tooltip match still left you hunting, because a tooltip has no visible text of its own: you knew the page held the answer but not which control to hover.

- **Every indexed tooltip now carries its owner's name** — resolved by a naming ladder that tries the control's `Content`, then its `Header`, then a `Label` property, then its automation name, and only gives up if none of those exist.
- **The match explainer quotes the owner** — "Matched tooltip on *Send comments: ...*", so the hover target is named outright.
- **Opening words are preserved** when the hit lands near the start of a tooltip, instead of eliding them into a leading ellipsis.

#210 The main bar carries what a running job needs; everything else opens from the File and Tools menus

File	+	–
CNC Controls/CNC Controls/ViewHostWindow.xaml.cs	195	2
CNC Controls/CNC Controls/ViewHostWindow.xaml	13	0
ioSender XL/ioSender XL/MainWindow.xaml.cs	157	52
CNC Controls/CNC Controls/AppConfig.cs	137	28
CNC Controls/CNC Controls/LayoutModel.cs	35	23
CNC Controls/CNC Controls/TabRegistry.cs	30	5
ioSender XL/ioSender XL/MainWindow.xaml	16	8
Locale/*/csv (7 locales)	7	0

The tab strip had grown to thirteen tabs, most of which are places you visit once to set something up rather than screens you work from. It is now cut back to the four used while a job actually runs —

Setup, Job, Work Order, Offsets — and each remaining view opens in its own window from **File** or **Tools**.

- **A hosted view keeps tab semantics** — ViewHostWindow runs the same Setup / Activate / CloseFile lifecycle a TabItem gave it, and caches the instance, so a view reopens in the state you left it. Closing is ESC or the window X; the windows are deliberately non-modal, because the machine keeps running behind them.
- **Placement is a layout slot, not a hardcoded decision** — the File and Tools menus are slots of the same layout tree that drives the tab strip, so what ships is a default rather than a rule.
- **Work Order stays a tab**, and File's Load / New Work Order select it rather than opening a second copy.
- **Existing profiles migrate once**, and only once: a saved arrangement that already has menu slots is left exactly as the user left it.

Host windows inherit the main window's DataContext explicitly — that does not cross a Window boundary on its own, and several views read their model from it rather than from Setup().

#211 Interface preferences gather under User Interface → General

File	+	–
CNC Controls/CNC Controls/UiGeneralConfigControl.xaml.cs	33	0
CNC Controls/CNC Controls/UiGeneralConfigControl.xaml	30	0
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	9	5
CNC Controls/CNC Controls/BasicConfigControl.xaml	8	18
CNC Controls/CNC Controls/BasicConfigControl.xaml.cs	0	1
Locale/*/csv (7 locales)	91	0

The Application page had become a mix of two unrelated things: how ioSender talks to the *controller*, and how the app itself looks and behaves. The second group now has a page of its own at **Settings** → **User Interface** → **General**, which sorts first under that heading.

- **Moved:** keep MDI focus, restore last window size, friendly Start/Pause run-bar labels, UI scale, and the auto-save / prompt-before-saving pair.
- **Deliberately left behind:** the grbl auto-save options — those write \$ settings to the machine, which is controller interaction, not an interface preference.
- **The Theme dropdown is removed** — it listed five themes and applied none of them. Dead UI that only ever raised the question of why it did nothing.

#212 A shortcut names a view, not a place — and you choose whether that view is a tab or a menu entry

File	+	–
ioSender XL/ioSender XL/MainWindow.xaml.cs	198	26
CNC Controls/CNC Controls/MainPageEditor.xaml.cs	163	65
CNC Controls/CNC Controls/KeyMapEditor.xaml.cs	77	103
CNC Controls/CNC Controls/ActionKeyBinder.cs	62	17
CNC Controls/CNC Controls/AppConfig.cs	46	22
CNC Controls/CNC Controls/MainPageEditor.xaml	26	13
ioSender XL/ioSender XL/MainWindow.xaml	12	9
docs/manual/index.html	30	11
Locale/*/csv (7 locales)	7	0

Moving ten views into the menus (#210) silently killed every keyboard shortcut bound to them: dispatch resolved a shortcut to a `TabItem` and gave up when there was not one. The fix is the principle rather than the symptom — **a shortcut id names a view, not a place**.

- **A key reaches its target wherever it lives** — tab or menu window — so moving a view never costs it its shortcut. The ids were deliberately not renamed when the views moved, so bindings made before the move still work.
- **One group, top level only**. Seven groups (Views, Settings pages, Machine Setup steps, Probing / Lathe / Odd Jobs tabs, Menu commands) collapse into a single **Top Level Tabs** list holding exactly the tab-strip and menu destinations. Second-level targets are withdrawn: whether something is currently a tab or a menu entry is a layout choice, not a category.
- **Main-menu commands are bindable** — Connect, Load Program, Load/New Work Order, Camera and the Help entries. All unbound by default, and a shortcut is refused while its menu entry is greyed out, so a key can never do what the menu will not.
- **The menu shows the key** — every shortcut-capable entry carries its binding in the gesture column, refreshed off the same event the tab-header badges use, so the two cannot disagree.
- **Top-level tabs becomes a placement editor** — one row per view choosing Tab bar, File menu, Tools menu or Not shown, with ordering within each. The old shuttle could only say "tab bar or nothing", and did not even list a menu-hosted view. Settings, Machine Setup and Job cannot be hidden, because the app puts them back rather than let a layout lock you out.

#213 Job tab: the jog pad and its go-to buttons are optional, and the panels use the room that frees up

File	+	-
ioSender XL/ioSender XL/JobView.xaml.cs	182	33
CNC Controls/CNC Controls/JogBaseControl.xaml	26	44
CNC Controls/CNC Controls/MainPageEditor.xaml	24	14
ioSender XL/ioSender XL/JobView.xaml	18	5
CNC Controls/CNC Controls/AppConfig.cs	17	1
ioSender XL/ioSender XL/MainWindow.xaml.cs	12	1
CNC Controls/CNC Controls/JogBaseControl.xaml.cs	11	21
docs/manual/index.html	5	2
Locale/*/csv (7 locales)	28	0

The jog pad was the widest thing competing with the program view, and nothing could remove it. Both it and its go-to buttons are now yours to switch off, and the panel columns finally use whatever that frees.

- **Show go-to buttons on the jog pad** (Settings → User Interface → General) shows the four corner targets and the centre bullseye. Off by default on a new profile — each one rapids the machine across the table, so you opt in once you know what they do — and an existing profile keeps whatever it already had.
- **The centre button loses its hidden second job.** While a jog was running it silently cancelled the jog instead of going to centre, with nothing on the button saying so; the same branch came out of the corner buttons. Releasing the key or button, Feed Hold and Reset all still stop a jog.
- **Show the jog pad on the Job tab** (Job tab layout) removes the pad entirely for anyone who finds the run bar's compact jog enough. Keyboard and game-controller jogging are unaffected — the run bar hosts the same control and does the key registration either way.
- **Panels fill one column before starting a second.** They used to be balanced by height, so two short panels always landed one per column and the second reserved its width whether or not it held anything. An unused column now collapses to nothing and the workspace gets the width back.
- **The right-most column clears the flyout strip**, so a pinned flyout no longer floats over the top of whatever panel is there.

#214 Fix batch: duplicate Work Order tabs, a setup prompt that could never be satisfied, Esc, and the settings scroll wheel

File	+	-
CNC Controls/CNC Controls/AppConfig.cs	99	8
CNC Controls/CNC Controls/MachineSetupWizard.xaml.cs	59	4
CNC Controls/CNC Controls/SettingsNavShell.xaml.cs	45	0
CNC Controls/CNC Controls/ViewHostWindow.xaml.cs	36	19
ioSender XL/ioSender XL/MainWindow.xaml.cs	31	16
CNC Controls/CNC Controls/ConsoleWindow.xaml.cs	25	0
ioSender XL/ioSender XL/JobView.xaml.cs	23	1
CNC Controls/CNC Controls/ProbeDefinition.cs	14	2
CNC Controls/CNC Controls/SettingsNavShell.xaml	7	1
CNC Controls/CNC Controls/ConsoleControl.xaml.cs	7	0
CNC Controls/CNC Controls/JogControl.xaml	6	2
docs/manual/index.html	3	2
CNC Controls/CNC Controls/ViewHostWindow.xaml	2	3

Five fixes, four of them fallout from the tabs-to-menus move (#210) and one older.

- **A new Work Order tab on every launch.** A fixup re-added the retired Odd Jobs node whenever the tree lacked one — which, once nothing else created it, was always — and the next fixup promoted that fresh node to a Work Order. An "add it if absent" fixup for a component nothing else creates is not idempotent, it is a generator. A dedupe pass repairs profiles that already grew copies.
- **Height Map could be deleted out of existence.** Its injection tested only the tab strip, but since menus became placement slots "not on the tab strip" no longer means "absent"; and the flat tab list, applied later, dropped nodes it did not name with nothing left to rescue them. Both closed.
- **"Let's finish setting up your machine" every single launch.** The prompt navigated via the Machine Setup tab, which no longer exists, so it left you on the Job screen — and because the wizard was never reached, no step could be completed, so it re-armed next launch. Self-sustaining rather than merely annoying.
- **Esc is free again.** The console toggle defaulted to Esc and is dispatched before any control sees the key, so Esc stopped cancelling edits, closing popups and backing out of things. It defaults to F12 now, existing profiles are moved off the old default, and the console window gained its own Esc-to-close — two-stage, so Esc still clears a part-typed command first.
- **The scroll wheel works over a settings page,** not just over its scrollbar. A list laid out at full height inside the page scroller had nothing of its own left to scroll, but still marked the wheel handled.
- **First-run setup could not be completed on a machine that already worked.** Apply was enabled only when a \$ setting would change, and it returned early on zero changes — before the one line that records which machine you picked. On a controller already holding the right settings, choosing your machine changes nothing, so Apply stayed greyed, the machine was never recorded, and the setup gate asked again on every launch with no way out from inside the app.

Apply now stays live while the picked machine differs from the stored one, and commits the identity when that is all there is to commit.

- **Menu-hosted views open at a usable size and fill it.** The host window was a fixed 1000×720, so Machine Setup's Apply row sat outside it; and the settings page scroller allowed horizontal scrolling, which makes a page lay out at its own natural width and never stretch — so widening the window just revealed more of a fixed-width page and right-aligned buttons stayed out of reach. The window now takes a share of the work area and the page is constrained to it.

#215 The views that moved into the menus can actually be opened

File	+	-
ioSender XL/ioSender XL/MainWindow.xaml.cs	14	6
CNC Controls Probing/CNC Controls Probing/ProbingView.xaml.cs	82	41
CNC Controls Lathe/CNC Controls Lathe/LatheWizardsView.xaml.cs	15	4
CNC Controls/CNC Controls/GrblConfigView.xaml.cs	12	2
CNC Controls/CNC Controls/ProbeDefinition.cs	4	1
ioSender XL/ioSender XL/JobView.xaml.cs	1	1
ioSender XL/ioSender XL/Default-App.config	820	10

Moving ten views off the tab bar (#210) gave each of them a new first act: instead of being a tab that already existed, a menu entry builds the view and shows a window. Everything below is that one change catching up with itself — and every one of them was reachable from a fresh install, because the affected views live in the menus by default.

- **The Tools menu was decorative.** Menu entries are created disabled and switched on when the controller connects, exactly as the tabs are — but the routine that switches them on was never called from anywhere. SD Card, Probing, Height Map and Lathe Tools were therefore not merely greyed: with no tab to fall back on, they could not be opened at all. The tab and menu paths are now driven from one place, and the routine is named after *views* rather than *tabs*, which is how the two came apart.
- **Probing crashed on open.** Its view model was built when the control loaded, but a hosted window selects its first inner tab while it is still being measured — before that. The setup also sat behind a flag shared by every instance, so even with the timing fixed, the second Probing window would have opened empty and crashed the same way. Setup now happens on demand, once per window, and the tab selection that arrives too early is replayed rather than lost.
- **Lathe Tools crashed on open,** differently: activating a wizard asks the controller for its parser state, which waits for the reply by pumping messages — illegal during the layout pass the activation was running inside. Activation is now queued to run once layout has finished.
- **A restart that fails to restart says so.** Relaunching after a settings change wrote nothing to the log, so a relaunch that never came back was indistinguishable from quitting the app. The attempt, the new process and any failure are now recorded. The probe library's legacy import gained the same treatment: it silently treated a corrupt file as no file.
- **The shipped default configuration is now a real one** — captured from a genuine first run rather than left for the app to invent at startup, so what a new install begins with is explicit and reviewable instead of implied.

Found while shooting the manual's screenshots against a first-run configuration: the Tools entries looked wrong in a capture, and the machine they were shot on had no saved layout to hide behind.