
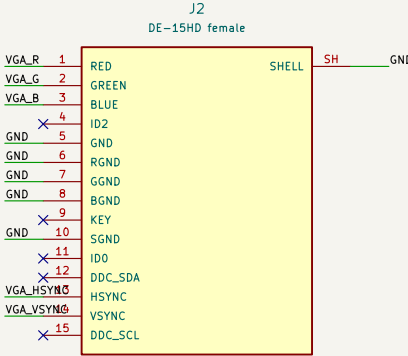













VGA / 3-bit resistor DAC per color
640x480 approximately 60 Hz; 75 ohm monitor termination



R0/G0/B0 are the least-significant bits (2k).
R2/G2/B2 are the most-significant bits (500 ohm).
Calculated full-scale: 0.686 V at ideal 3.3 V GPIO levels.
Physical levels, rise time, and sync timing need validation.
IDC power, UART, RUN, and GPIO46/47 are unused.

Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-vga.kicad_sch

Title: a2ext-vga

Size: A3 Date: 2026-09-17

KiCad E.D.A. 10.0.6

Rev: 0.1-draft

Id: 1/1