
DVI / HDMI TYPE A / RESISTOR-DRIVEN TMDS
640x480 / 60 Hz; no audio or EDID negotiation

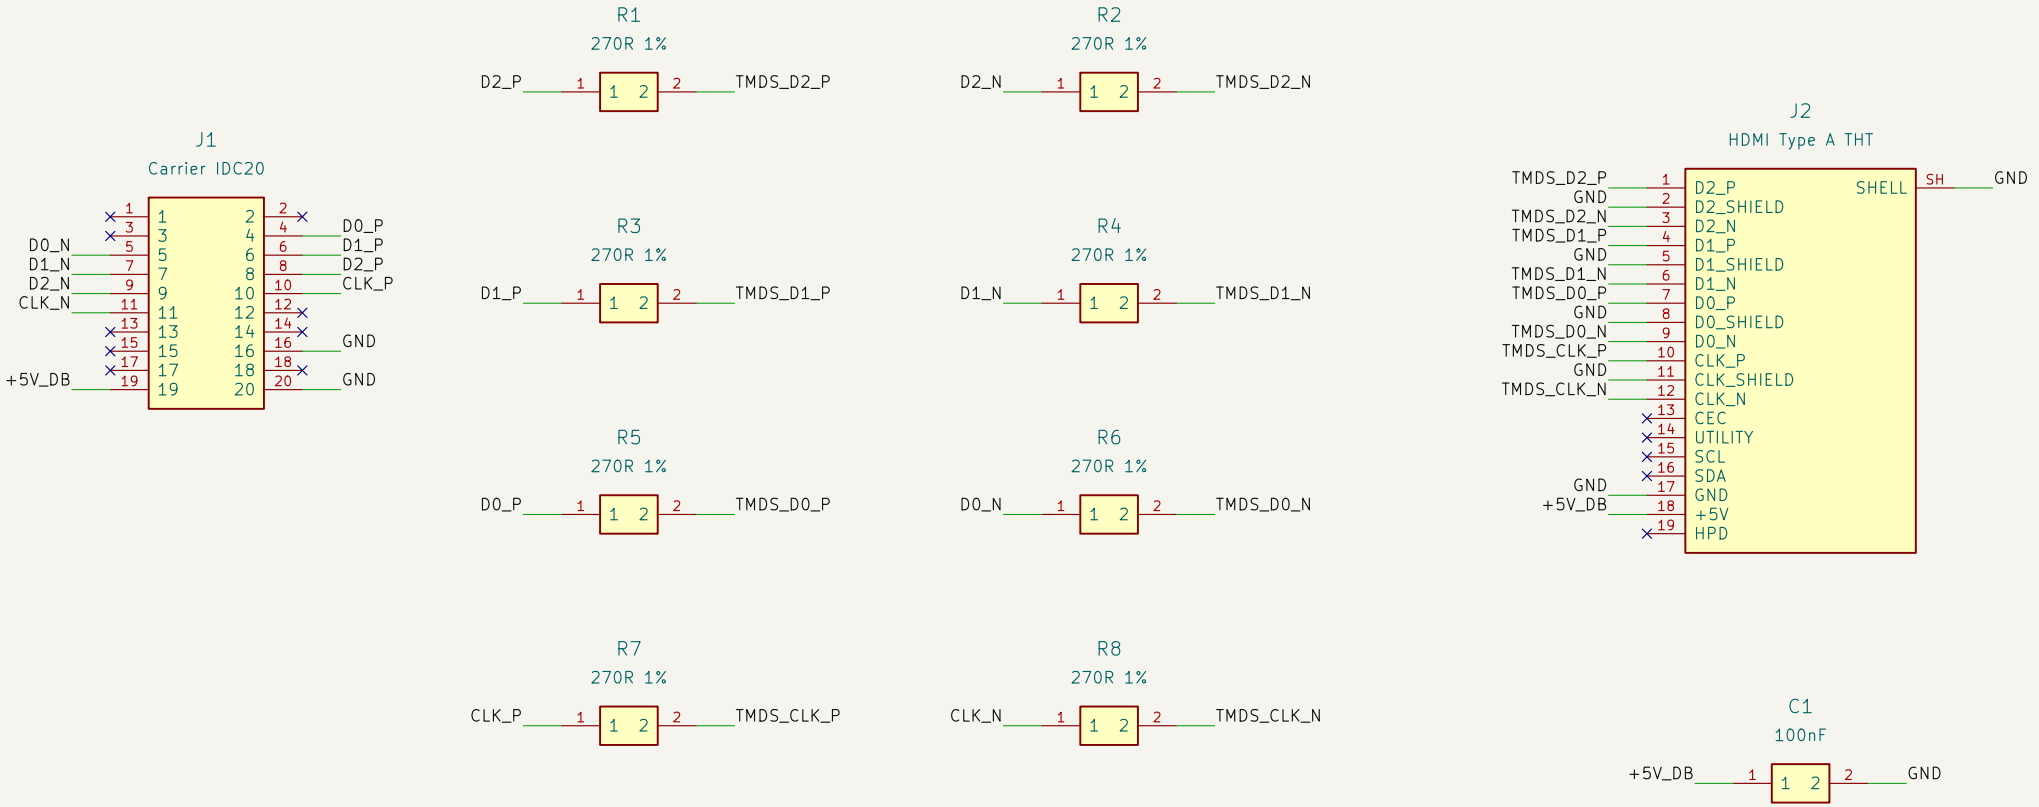

Even GPIO: positive. Odd GPIO: negative.
libdvi: invert_diffpairs=false; use 64-bit GPIO masks.
+5V_DB: fused slot supply. DDC/HPD/CEC: NC.
Start with direct mating; verify signal integrity and monitor lock.

Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-dvi.kicad_sch

Title: a2ext-dvi

Size: A4	Date: 2026-10-12	**Rev: 0.3**
KiCad E.D.A. 10.0.7		Id: 1/1