




VGA / RGB333 RESISTOR DAC
640x480 / 60 Hz; 75 ohm monitor termination

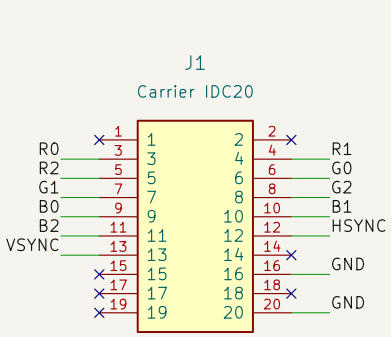































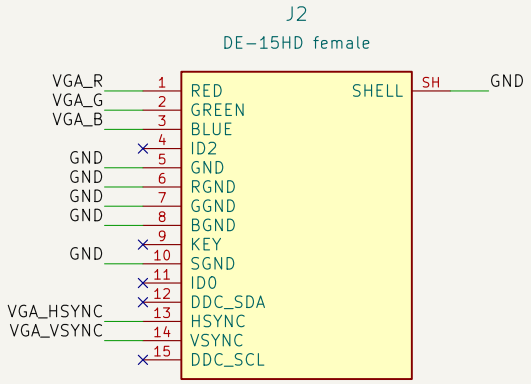

R0/G0/B0: LSB (2k). R2/G2/B2: MSB (500 ohm).
Ideal full-scale: 0.686 V with 3.3 V GPIO and 75 ohm load.
Verify levels, rise times, and sync timing on hardware.
IDC power, UART, RUN, and GPIO46/47 are unused.

Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-vga.kicad_sch

Title: a2ext-vga

Size: A4	Date: 2026-10-12	**Rev: 0.3**
KiCad E.D.A. 10.0.7		Id: 1/1