
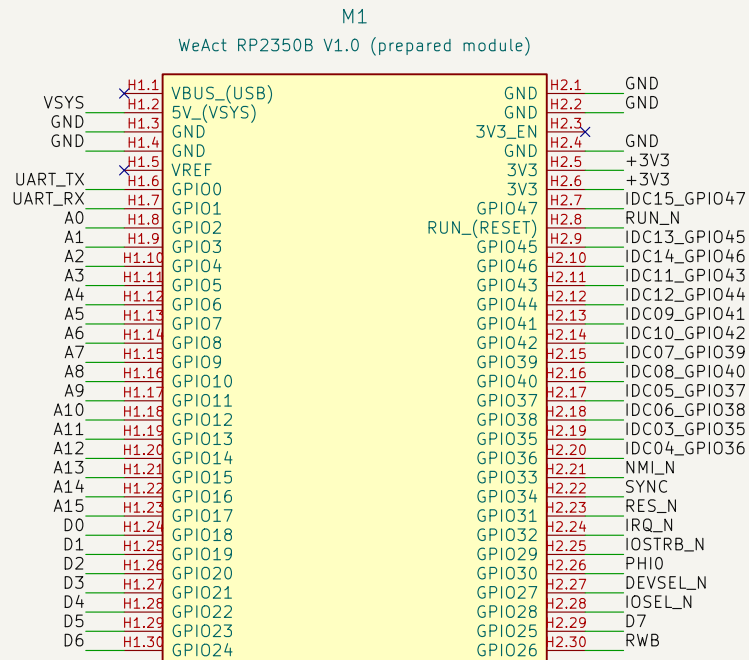






APPLE II / RP2350B CARRIER
Direct bus; slot-only power

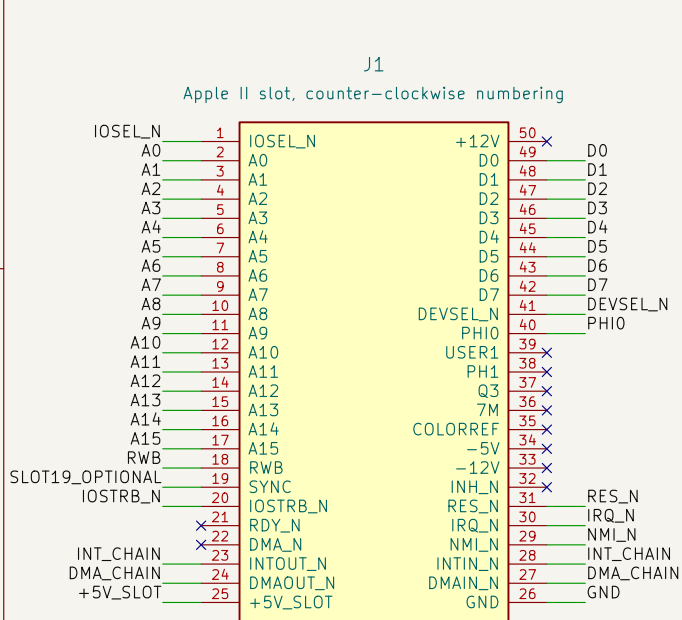

MODULE PREPARATION
Remove R16, R19, R14, U2.
Leave U7/R13/C23 empty.
VBUS: NC; USB data only.
See carrier README.

SIGNAL LABELS
_N = active low.
UART: carrier TX / RX.
H1.n / H2.n: module pins.
JP1: open except slot 7.
IRQ/NMI: low or release.

Slot 25 -> F1/D1 -> VSYS.
5V inputs need powered IOVDD.
RUN is separate from /RES.
No hot-plugging; flash off-host.
Use a 5V fixture at slot 25/26.

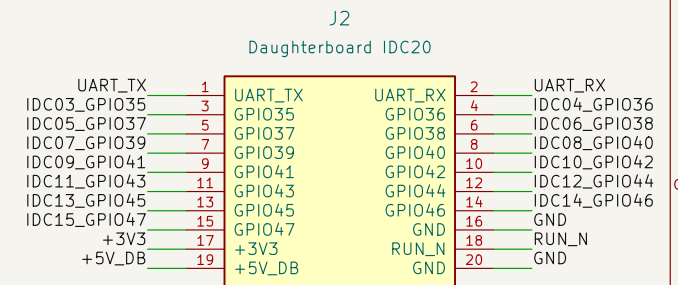

Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-carrier.kicad_sch

Title: a2ext-carrier

Size: A4 Date: 2026-09-18

KiCad E.D.A. 10.0.6

Rev: 0.5

Id: 1/1