

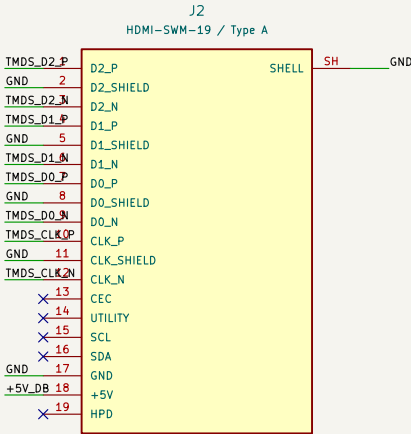










DVI video over HDMI Type A / resistor-driven TMDS
640x480 approximately 60 Hz; no audio or EDID negotiation



Even GPIO = positive pair member; odd GPIO = negative.
Use libdvi with invert_diffpairs=false and 64-bit GPIO masks.
+5V_DB comes from the carrier's fused slot supply.
DDC/HPD/CEC are NC; direct mating only for initial qualification.
Signal integrity and monitor compatibility require physical tests.

Schematic prototype: physical qualification pending

Sheet: /
File: a2ext-dvi.kicad_sch

Title: a2ext-dvi

Size: A3 Date: 2026-09-17

KiCad E.D.A. 10.0.6

Rev: 0.1-draft

Id: 1/1