





Sheet: /MCU/
File: MCU.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.4

Date:


Rev:
Id: 2/7



Sheet: /Minimal_LT8304/		
File: Minimal_LT8304.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4		Id: 3/7

Diagram illustrating the pin configurations for various connectors used in the system:

- J2**: CLP-102-02-G-D-BE. Pin 3 is connected to GND, and Pin 4 is connected to GND.
- J3**: CLP-102-02-G-D-BE. Pin 2 is connected to GND, and Pin 4 is connected to GND.
- J4**: CLP-102-02-G-D-BE. Pin 2 is connected to GND, and Pin 4 is connected to GND.
- J5**: CLP-102-02-G-D-BE. Pin 2 is connected to GND, and Pin 4 is connected to GND.
- J6**: CLP-102-02-G-D-BE. Pin 2 is connected to GND, and Pin 4 is connected to GND.
- J7**: CLP-102-02-G-D-BE. Pin 2 is connected to GND, and Pin 4 is connected to GND.
- J8**: CLP-114-02-G-D-BE. Pin 1 is connected to GND, and Pin 2 is connected to GND.

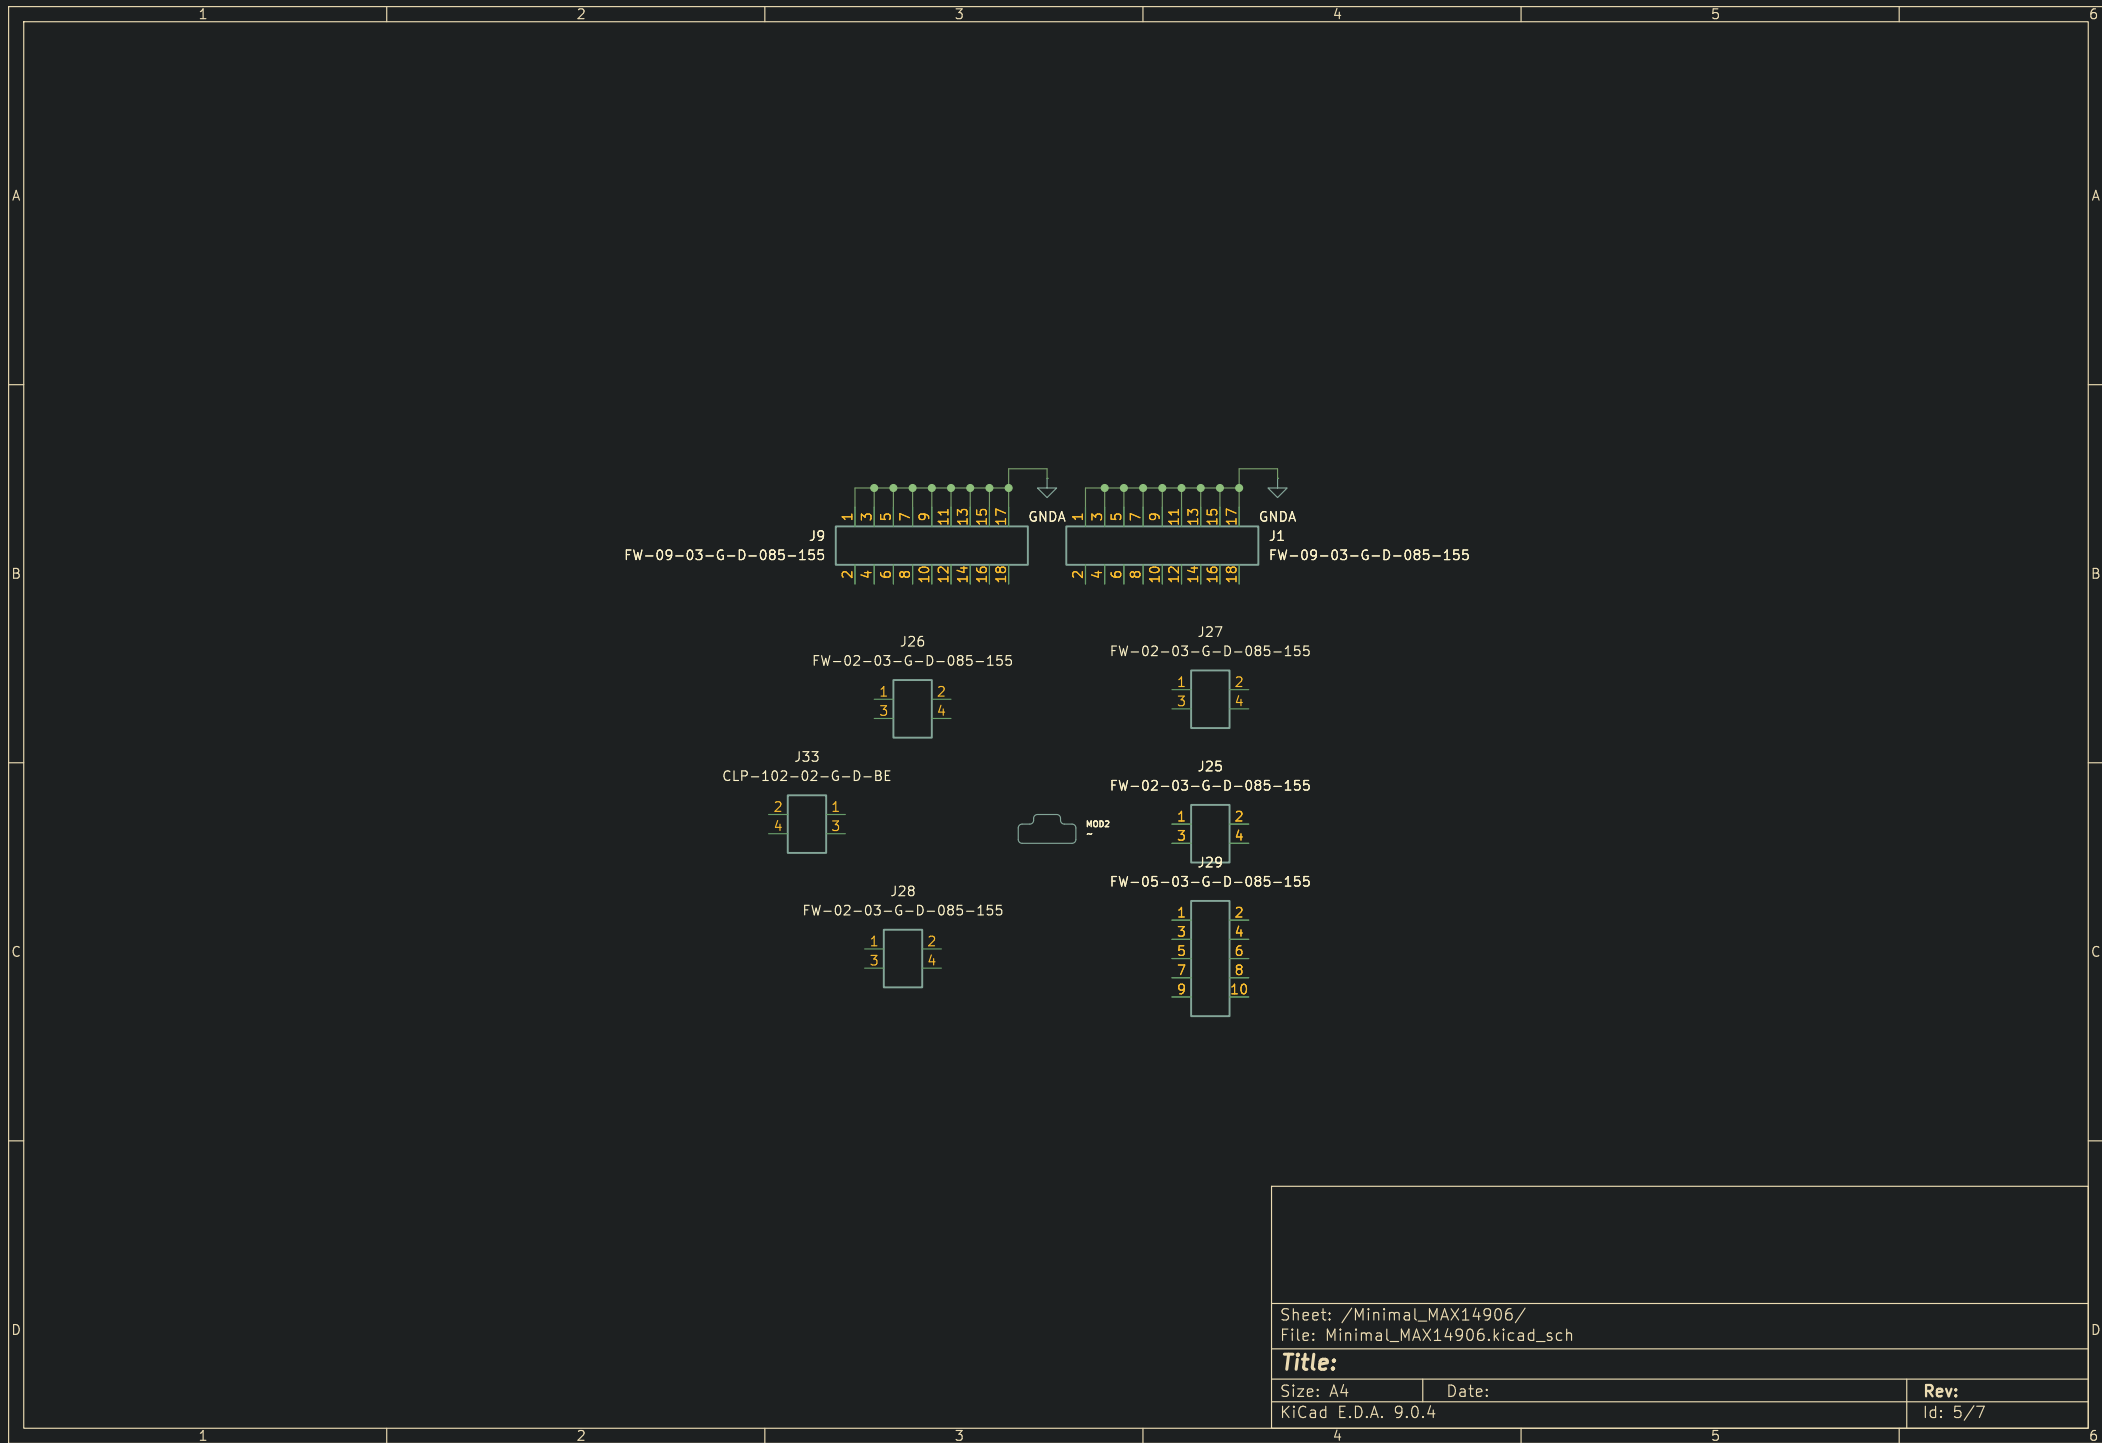



Sheet: /Minimal_LTC9111/
File: Minimal_LTC9111.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 6/7

