



REVIEW DRAFT

FIDO Metadata Statements

FIDO Alliance Review Draft 15 September 2016

This version:

<https://fidoalliance.org/specs/fido-u2f-v1.1-rd-20160915/fido-metadata-statement-v1.1-rd-20160915.html>

Previous version:

<https://fidoalliance.org/specs/fido-uaf-v1.0-ps-20141208/fido-uaf-authnr-metadata-v1.0-ps-20141208.html>

Editors:

[Rolf Lindemann, Nok Nok Labs, Inc.](#)

John Kemp, [FIDO Alliance](#)

Contributors:

[Brad Hill, PayPal, Inc.](#)

[Davit Baghdasaryan, Nok Nok Labs, Inc.](#)

Copyright © 2013-2016 [FIDO Alliance](#) All Rights Reserved.

Abstract

FIDO authenticators may have many different form factors, characteristics and capabilities. This document defines a standard means to describe the relevant pieces of information about an authenticator in order to interoperate with it, or to make risk-based policy decisions about transactions involving a particular authenticator.

Status of This Document

This section describes the status of this document at the time of its publication. Other documents may supersede this document. A list of current FIDO Alliance publications and the latest revision of this technical report can be found in the [FIDO Alliance specifications index](#) at <https://www.fidoalliance.org/specifications/>.

This document was published by the [FIDO Alliance](#) as a Review Draft. This document is intended to become a FIDO Alliance Proposed Standard. If you wish to make comments regarding this document, please [Contact Us](#). All comments are welcome.

This is a Review Draft Specification and is not intended to be a basis for any implementations as the Specification may change. Permission is hereby granted to use the Specification solely for the purpose of reviewing the Specification. No rights are granted to prepare derivative works of this Specification. Entities seeking permission to reproduce portions of this Specification for other uses must contact the FIDO Alliance to determine whether an appropriate license for such use is available.

Implementation of certain elements of this Specification may require licenses under third party intellectual property rights, including without limitation, patent rights. The FIDO Alliance, Inc. and its Members and any other contributors to the Specification are not, and shall not be held, responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

THIS FIDO ALLIANCE SPECIFICATION IS PROVIDED "AS IS" AND WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ANY EXPRESS OR IMPLIED WARRANTY OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Table of Contents

1. [Notation](#)
 - 1.1 [Conformance](#)
2. [Overview](#)
 - 2.1 [Scope](#)
 - 2.2 [Audience](#)
 - 2.3 [Architecture](#)
3. [Types](#)

- 3.1 [CodeAccuracyDescriptor](#) dictionary
 - 3.1.1 [Dictionary](#) [CodeAccuracyDescriptor](#) [Members](#)
- 3.2 [BiometricAccuracyDescriptor](#) dictionary
 - 3.2.1 [Dictionary](#) [BiometricAccuracyDescriptor](#) [Members](#)
- 3.3 [PatternAccuracyDescriptor](#) dictionary
 - 3.3.1 [Dictionary](#) [PatternAccuracyDescriptor](#) [Members](#)
- 3.4 [VerificationMethodDescriptor](#) dictionary
 - 3.4.1 [Dictionary](#) [VerificationMethodDescriptor](#) [Members](#)
- 3.5 [verificationMethodANDCombinations](#) typedef
- 3.6 [rgbPaletteEntry](#) dictionary
 - 3.6.1 [Dictionary](#) [rgbPaletteEntry](#) [Members](#)
- 3.7 [DisplayPNGCharacteristicsDescriptor](#) dictionary
 - 3.7.1 [Dictionary](#) [DisplayPNGCharacteristicsDescriptor](#) [Members](#)
- 3.8 [EcdaaTrustAnchor](#) dictionary
 - 3.8.1 [Dictionary](#) [EcdaaTrustAnchor](#) [Members](#)
- 3.9 [ExtensionDescriptor](#) dictionary
 - 3.9.1 [Dictionary](#) [ExtensionDescriptor](#) [Members](#)
- 4. [Metadata](#) Keys
 - 4.1 [Dictionary](#) [MetadataStatement](#) [Members](#)
- 5. [Metadata Statement Format](#)
 - 5.1 [UAF Example](#)
 - 5.2 [U2F Example](#)
- 6. [Additional Considerations](#)
 - 6.1 [Field updates and metadata](#)
- A. [References](#)
 - A.1 [Normative references](#)
 - A.2 [Informative references](#)

1. Notation

Type names, attribute names and element names are written as `code`.

String literals are enclosed in `""`, e.g. `"UAF-TLV"`.

In formulas we use `"|"` to denote byte wise concatenation operations.

DOM APIs are described using the ECMAScript [\[ECMA-262\]](#) bindings for WebIDL [\[WebIDL-ED\]](#).

Following [\[WebIDL-ED\]](#), dictionary members are optional unless they are explicitly marked as required.

WebIDL dictionary members **must not** have a value of null.

Unless otherwise specified, if a WebIDL dictionary member is DOMString, it **must not** be empty.

Unless otherwise specified, if a WebIDL dictionary member is a List, it **must not** be an empty list.

All diagrams, examples, notes in this specification are non-normative.

NOTE

Note: Certain dictionary members need to be present in order to comply with FIDO requirements. Such members are marked in the WebIDL definitions found in this document, as **required**. The keyword **required** has been introduced by [\[WebIDL-ED\]](#), which is a work-in-progress. If you are using a WebIDL parser which implements [\[WebIDL\]](#), then you may remove the keyword **required** from your WebIDL and use other means to ensure those fields are present.

1.1 Conformance

As well as sections marked as non-normative, all authoring guidelines, diagrams, examples, and notes in this specification are non-normative. Everything else in this specification is normative.

The key words **must**, **must not**, **required**, **should**, **should not**, **recommended**, **may**, and **optional** in this specification are to be interpreted as described in [\[RFC2119\]](#).

2. Overview

This section is non-normative.

The FIDO family of protocols enable simpler and more secure online authentication utilizing a wide variety of different devices in a competitive marketplace. Much of the complexity behind this variety is hidden from Relying Party applications, but in order to accomplish the goals of FIDO, Relying Parties must have some means of discovering and verifying various characteristics of authenticators. Relying Parties can learn a subset of verifiable information for authenticators certified by

the FIDO Alliance with an Authenticator Metadata statement. The URL to access that Metadata statement is provided by the Metadata TOC file accessible through the Metadata Service [[FIDOMetadataService](#)].

For definitions of terms, please refer to the FIDO Glossary [[FIDOGlossary](#)].

2.1 Scope

This document describes the format of and information contained in *Authenticator Metadata* statements. For a definitive list of possible values for the various types of information, refer to the FIDO Registry of Predefined Values [[FIDORegistry](#)].

The description of the processes and methods by which authenticator metadata statements are distributed and the methods how these statements can be verified are described in the Metadata Service Specification [[FIDOMetadataService](#)].

2.2 Audience

The intended audience for this document includes:

- FIDO authenticator vendors who wish to produce metadata statements for their products.
- FIDO server implementers who need to consume metadata statements to verify characteristics of authenticators and attestation statements, make proper algorithm choices for protocol messages, create policy statements or tailor various other modes of operation to authenticator-specific characteristics.
- FIDO relying parties who wish to
 - create custom policy statements about which authenticators they will accept
 - risk score authenticators based on their characteristics
 - verify attested authenticator IDs for cross-referencing with third party metadata

2.3 Architecture

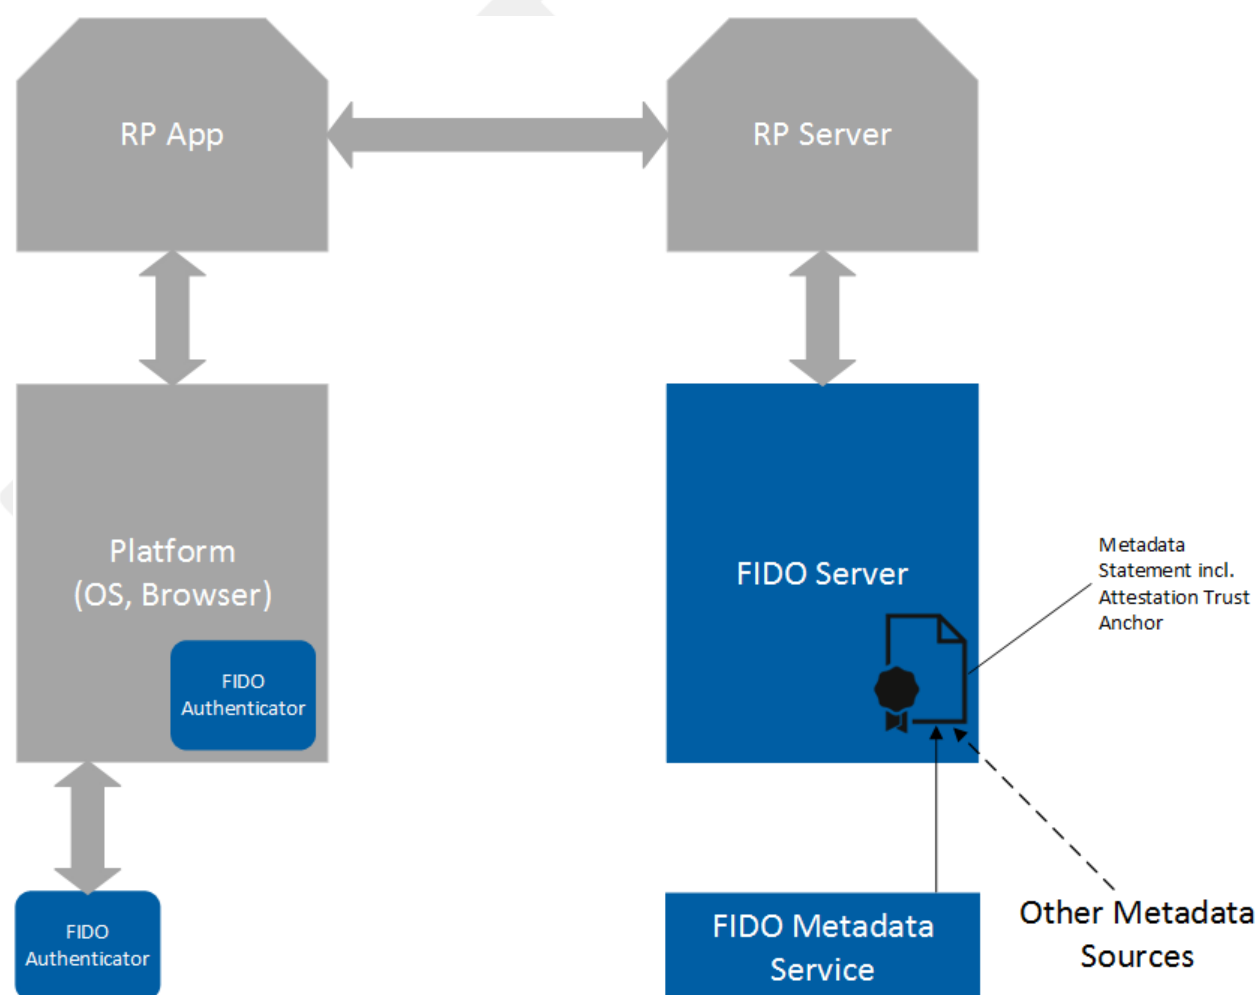


Fig. 1 The FIDO Architecture

Authenticator metadata statements are used directly by the FIDO server at a relying party, but the information contained in the authoritative statement is used in several other places. How a server obtains these metadata statements is described in [[FIDOMetadataService](#)].

The workflow around an authenticator metadata statement is as follows:

1. The authenticator vendor produces a metadata statement describing the characteristics of an authenticator.
2. The metadata statement is submitted to the FIDO Alliance as part of the FIDO certification process. The FIDO Alliance distributes the metadata as described in [[FIDOMetadataService](#)].

3. A FIDO relying party configures its registration policy to allow authenticators matching certain characteristics to be registered.
4. The FIDO server sends a registration challenge message. This message can contain such policy statement.
5. Depending on the FIDO protocol being used, either the relying party application or the FIDO UAF Client receives the policy statement as part of the challenge message and processes it. It queries available authenticators for their self-reported characteristics and (with the user's input) selects an authenticator that matches the policy, to be registered.
6. The client processes and sends a registration response message to the server. This message contains a reference to the authenticator model and, optionally, a signature made with the private key corresponding to the public key in the authenticator's attestation certificate.
7. The FIDO Server looks up the metadata statement for the particular authenticator model. If the metadata statement lists an attestation certificate(s), it verifies that an attestation signature is present, and made with the private key corresponding to either (a) one of the certificates listed in this metadata statement or (b) corresponding to the public key in a certificate that *chains* to one of the issuer certificates listed in the authenticator's metadata statement.
8. The FIDO Server next verifies that the authenticator meets the originally supplied registration policy based on its authoritative metadata statement. This prevents the registration of unexpected authenticator models.
9. *Optionally*, a FIDO Server may, with input from the Relying Party, assign a risk or trust score to the authenticator, based on its metadata, including elements not selected for by the stated policy.
10. *Optionally*, a FIDO Server may cross-reference the attested authenticator model with other metadata databases published by third parties. Such third-party metadata might, for example, inform the FIDO Server if an authenticator has achieved certifications relevant to certain markets or industry verticals, or whether it meets application-specific regulatory requirements.

3. Types

This section is normative.

3.1 CodeAccuracyDescriptor dictionary

The **CodeAccuracyDescriptor** describes the relevant accuracy/complexity aspects of passcode user verification methods.

NOTE

One example of such a method is the use of 4 digit PIN codes for mobile phone SIM card unlock.

We are using the numeral system **base** (radix) and **minLen**, instead of the number of potential combinations since there is sufficient evidence [[iPhonePasscodes](#)] [[MoreTopWorstPasswords](#)] that users don't select their code evenly distributed at random. So software might take into account the various probability distributions for different bases. This essentially means that in practice, passcodes are not as secure as they could be if randomly chosen.

WebIDL

```
dictionary CodeAccuracyDescriptor {
    required unsigned short base;
    required unsigned short minLength;
    unsigned short maxRetries;
    unsigned short blockSlowdown;
};
```

3.1.1 Dictionary **CodeAccuracyDescriptor** Members

base of type **required unsigned short**

The numeric system base (radix) of the code, e.g. 10 in the case of decimal digits.

minLength of type **required unsigned short**

The minimum number of digits of the given base required for that code, e.g. 4 in the case of 4 digits.

maxRetries of type **unsigned short**

Maximum number of false attempts before the authenticator will block this method (at least for some time). 0 means it will never block.

blockSlowdown of type **unsigned short**

Enforced minimum number of seconds wait time after blocking (e.g. due to forced reboot or similar). 0 means this user verification method will be blocked, either permanently or until an alternative user verification method succeeded. All alternative user verification methods **must** be specified appropriately in the Metadata in **userVerificationDetails**.

3.2 BiometricAccuracyDescriptor dictionary

The **BiometricAccuracyDescriptor** describes relevant accuracy/complexity aspects in the case of a biometric user verification method.

NOTE

The *False Acceptance Rate* (FAR) and *False Rejection Rate* (FRR) values typically are interdependent via the *Receiver Operator Characteristic* (ROC) curve.

The *False Artefact Acceptance Rate* (FAAR) value reflects the capability of detecting presentation attacks, such as

the detection of rubber finger presentation.

The FAR, FRR, and FAAR values given here **must** reflect the actual configuration of the authenticators (as opposed to being theoretical best case values).

At least one of the values **must** be set. If the vendor doesn't want to specify such values, then `VerificationMethodDescriptor.baDesc` **must** be omitted.

NOTE

Typical fingerprint sensor characteristics can be found in Google [Android 6.0 Compatibility Definition](#) and Apple [iOS Security Guide](#).

WebIDL

```
dictionary BiometricAccuracyDescriptor {  
    double FAR;  
    double FRR;  
    double EER;  
    double FAAR;  
    unsigned short maxReferenceDataSets;  
    unsigned short maxRetries;  
    unsigned short blockSlowdown;  
};
```

3.2.1 Dictionary `BiometricAccuracyDescriptor` Members

FAR of type `double`

The false acceptance rate [ISO19795-1] for a single reference data set, i.e. the percentage of non-matching data sets that are accepted as valid ones. For example a FAR of 0.002% would be encoded as 0.00002.

NOTE

The resulting FAR when all reference data sets are used is $\text{maxReferenceDataSets} * \text{FAR}$.

The false acceptance rate is relevant for the security. Lower false acceptance rates mean better security.

Only the live captured subjects are covered by this value - not the presentation of artefacts.

FRR of type `double`

The false rejection rate for a single reference data set, i.e. the percentage of presented valid data sets that lead to a (false) non-acceptance. For example a FRR of 10% would be encoded as 0.1.

NOTE

The false rejection rate is relevant for the convenience. Lower false acceptance rates mean better convenience.

EER of type `double`

The equal error rate for a single reference data set.

FAAR of type `double`

The false artefact acceptance rate [ISO30107-1], i.e. the percentage of artefacts that are incorrectly accepted by the system. For example a FAAR of 0.1% would be encoded as 0.001.

NOTE

The false artefact acceptance rate is relevant for the security of the system. Lower false artefact acceptance rates imply better security.

maxReferenceDataSets of type `unsigned short`

Maximum number of alternative reference data sets, e.g. 3 if the user is allowed to enroll 3 different fingers to a fingerprint based authenticator.

maxRetries of type `unsigned short`

Maximum number of false attempts before the authenticator will block this method (at least for some time). 0 means it will never block.

blockSlowdown of type `unsigned short`

Enforced minimum number of seconds wait time after blocking (e.g. due to forced reboot or similar). 0 means that this user verification method will be blocked either permanently or until an alternative user verification method succeeded. All alternative user verification methods **must** be specified appropriately in the metadata in `userVerificationDetails`.

3.3 PatternAccuracyDescriptor dictionary

The **PatternAccuracyDescriptor** describes relevant accuracy/complexity aspects in the case that a pattern is used as the user verification method.

NOTE

One example of such a pattern is the 3x3 dot matrix as used in Android [[AndroidUnlockPattern](#)] screen unlock. The **minComplexity** would be 1624 in that case, based on the user choosing a 4-digit PIN, the minimum allowed for this mechanism.

WebIDL

```
dictionary PatternAccuracyDescriptor {  
    required unsigned long minComplexity;  
    unsigned short maxRetries;  
    unsigned short blockSlowdown;  
};
```

3.3.1 Dictionary **PatternAccuracyDescriptor** Members

minComplexity of type **required unsigned long**

Number of possible patterns (having the minimum length) out of which exactly one would be the right one, i.e. 1/probability in the case of equal distribution.

maxRetries of type **unsigned short**

Maximum number of false attempts before the authenticator will block authentication using this method (at least temporarily). 0 means it will never block.

blockSlowdown of type **unsigned short**

Enforced minimum number of seconds wait time after blocking (due to forced reboot or similar mechanism). 0 means this user verification method will be blocked, either permanently or until an alternative user verification method method succeeded. All alternative user verification methods **must** be specified appropriately in the metadata under **userVerificationDetails**.

3.4 VerificationMethodDescriptor dictionary

A descriptor for a specific *base user verification method* as implemented by the authenticator.

A base user verification method must be chosen from the list of those described in [[FIDORegistry](#)]

NOTE

In reality, several of the methods described above might be combined. For example, a fingerprint based user verification can be combined with an alternative password.

The specification of the related AccuracyDescriptor is optional, but recommended.

WebIDL

```
dictionary VerificationMethodDescriptor {  
    required unsigned long userVerification;  
    CodeAccuracyDescriptor caDesc;  
    BiometricAccuracyDescriptor baDesc;  
    PatternAccuracyDescriptor paDesc;  
};
```

3.4.1 Dictionary **VerificationMethodDescriptor** Members

userVerification of type **required unsigned long**

a *single* **USER_VERIFY** constant (see [[FIDORegistry](#)]), **not a bit flag combination**. This value **must** be non-zero.

caDesc of type *CodeAccuracyDescriptor*

May optionally be used in the case of method **USER_VERIFY_PASSCODE**.

baDesc of type *BiometricAccuracyDescriptor*

May optionally be used in the case of method **USER_VERIFY_FINGERPRINT**, **USER_VERIFY_VOICEPRINT**, **USER_VERIFY_FACEPRINT**, **USER_VERIFY_EYEPRINT**, or **USER_VERIFY_HANDPRINT**.

paDesc of type *PatternAccuracyDescriptor*

May optionally be used in case of method **USER_VERIFY_PATTERN**.

3.5 verificationMethodANDCombinations typedef

WebIDL

```
typedef VerificationMethodDescriptor[] VerificationMethodANDCombinations;
```


`VerificationMethodANDCombinations` **must** be non-empty. It is a list containing the base user verification methods which must be passed as part of a successful user verification.

This list will contain only a single entry if using a single user verification method is sufficient.

If this list contains multiple entries, then all of the listed user verification methods **must** be passed as part of the user verification process.

3.6 rgbPaletteEntry dictionary

The `rgbPaletteEntry` is an RGB three-sample tuple palette entry

WebIDL

```
dictionary rgbPaletteEntry {  
  required unsigned short r;  
  required unsigned short g;  
  required unsigned short b;  
};
```

3.6.1 Dictionary `rgbPaletteEntry` Members

- r** of type `required unsigned short`
Red channel sample value
- g** of type `required unsigned short`
Green channel sample value
- b** of type `required unsigned short`
Blue channel sample value

3.7 DisplayPNGCharacteristicsDescriptor dictionary

The `DisplayPNGCharacteristicsDescriptor` describes a PNG image characteristics as defined in the PNG [PNG] spec for IHDR (image header) and PLTE (palette table)

WebIDL

```
dictionary DisplayPNGCharacteristicsDescriptor {  
  required unsigned long width;  
  required unsigned long height;  
  required octet bitDepth;  
  required octet colorType;  
  required octet compression;  
  required octet filter;  
  required octet interlace;  
  rgbPaletteEntry[] plte;  
};
```

3.7.1 Dictionary `DisplayPNGCharacteristicsDescriptor` Members

- width** of type `required unsigned long`
image width
- height** of type `required unsigned long`
image height
- bitDepth** of type `required octet`
Bit depth - bits per sample or per palette index.
- colorType** of type `required octet`
Color type defines the PNG image type.
- compression** of type `required octet`
Compression method used to compress the image data.
- filter** of type `required octet`
Filter method is the preprocessing method applied to the image data before compression.
- interlace** of type `required octet`
Interlace method is the transmission order of the image data.
- plte** of type array of `rgbPaletteEntry`
1 to 256 palette entries

3.8 EcdaaTrustAnchor dictionary

In the case of ECDAAs attestation, the ECDAAs-Issuer's trust anchor **must** be specified in this field.

WebIDL

```
dictionary EcdaaTrustAnchor {  
  required DOMString x;  
};
```

```

    required DOMString Y;
    required DOMString C;
    required DOMString sX;
    required DOMString sY;
    required DOMString G1Curve;
};

```

3.8.1 Dictionary **EcdaaTrustAnchor** Members

- x** of type **required DOMString**
base64url encoding of the result of ECPPoint2ToB of the $ECP_{2X} = P_2^x X = P_2^x$. See [FIDOEcdaaAlgorithm] for the definition of ECPPoint2ToB.
- y** of type **required DOMString**
base64url encoding of the result of ECPPoint2ToB of the $ECP_{2Y} = P_2^y Y = P_2^y$. See [FIDOEcdaaAlgorithm] for the definition of ECPPoint2ToB.
- c** of type **required DOMString**
base64url encoding of the result of BigIntegerToB(**cc**). See section "Issuer Specific ECDA Parameters" in [FIDOEcdaaAlgorithm] for an explanation of **cc**. See [FIDOEcdaaAlgorithm] for the definition of BigIntegerToB.
- sx** of type **required DOMString**
base64url encoding of the result of BigIntegerToB(**sxsx**). See section "Issuer Specific ECDA Parameters" in [FIDOEcdaaAlgorithm] for an explanation of **sxsx**. See [FIDOEcdaaAlgorithm] for the definition of BigIntegerToB.
- sy** of type **required DOMString**
base64url encoding of the result of BigIntegerToB(**sysy**). See section "Issuer Specific ECDA Parameters" in [FIDOEcdaaAlgorithm] for an explanation of **sysy**. See [FIDOEcdaaAlgorithm] for the definition of BigIntegerToB.
- G1Curve** of type **required DOMString**
Name of the Barreto-Naehrig elliptic curve for G1. "BN_P256", "BN_P638", "BN_ISOP256", and "BN_ISOP512" are supported. See section "Supported Curves for ECDA" in [FIDOEcdaaAlgorithm] for details.

NOTE

Whenever a party uses this trust anchor for the first time, it must first verify that it was correctly generated by verifying **s**, **sX**, **sY**, **sX**, **sY**. See [FIDOEcdaaAlgorithm] for details.

3.9 ExtensionDescriptor dictionary

This descriptor contains an extension supported by the authenticator.

WebIDL

```

dictionary ExtensionDescriptor {
    required DOMString id;
    DOMString data;
    required boolean fail_if_unknown;
};

```

3.9.1 Dictionary **ExtensionDescriptor** Members

- id** of type **required DOMString**
Identifies the extension.
- data** of type **DOMString**
Contains arbitrary data further describing the extension and/or data needed to correctly process the extension.
This field **may** be missing or it **may** be empty.
- fail_if_unknown** of type **required boolean**
Indicates whether unknown extensions must be ignored (**false**) or must lead to an error (**true**) when the extension is to be processed by the FIDO Server, FIDO Client, ASM, or FIDO Authenticator.
- A value of **false** indicates that unknown extensions **must** be ignored
 - A value of **true** indicates that unknown extensions **must** result in an error.

4. Metadata Keys

This section is normative.

WebIDL

```

dictionary MetadataStatement {
    AAID
    AAGUID
    aaid;
    aaguid;
};

```



```

DOMString[]
required DOMString
required unsigned short
DOMString
required Version[]
required DOMString
required unsigned short
required unsigned short
required unsigned short[]
required VerificationMethodANDCombinations[]
required unsigned short
boolean
boolean
required unsigned short
required unsigned long
required boolean
required unsigned short
DOMString
DisplayPNGCharacteristicsDescriptor[]
required DOMString[]
EcdaaTrustAnchor[]
DOMString
ExtensionDescriptor
};
attestationCertificateKeyIdentifiers;
description;
authenticatorVersion;
protocolFamily;
upv;
assertionScheme;
authenticationAlgorithm;
publicKeyAlgAndEncoding;
attestationTypes;
userVerificationDetails;
keyProtection;
isKeyRestricted;
isFreshUserVerificationRequired;
matcherProtection;
attachmentHint;
isSecondFactorOnly;
tcDisplay;
tcDisplayContentType;
tcDisplayPNGCharacteristics;
attestationRootCertificates;
ecdaaTrustAnchors;
icon;
supportedExtensions[];

```

4.1 Dictionary **MetadataStatement** Members

aaid of type **AAID**

The Authenticator Attestation ID. See [\[UAFProtocol\]](#) for the definition of the AAID structure. This field **must** be set if the authenticator implements FIDO UAF.

NOTE

FIDO UAF Authenticators support AAID, but they don't support AAGUID.

aaguid of type **AAGUID**

The Authenticator Attestation GUID. See [\[FIDOKeyAttestation\]](#) for the definition of the AAGUID structure. This field **must** be set if the authenticator implements FIDO 2.

NOTE

FIDO 2 Authenticators support AAGUID, but they don't support AAID.

attestationCertificateKeyIdentifiers of type array of **DOMString**

A list of the attestation certificate public key identifiers encoded as hex string. This value **must** be calculated according to method 1 for computing the keyIdentifier as defined in [\[RFC5280\]](#) section 4.2.1.2. The hex string **must not** contain any non-hex characters (e.g. spaces). All hex letters **must** be lower case. This field **must** be set if neither **aaid** nor **aaguid** are set. Setting this field implies that the attestation certificate(s) are dedicated to a single authenticator model.

All attestationCertificateKeyIdentifier values should be unique within the scope of the Metadata Service.

NOTE

FIDO U2F Authenticators typically do not support AAID nor AAGUID, but they use attestation certificates dedicated to a single authenticator model.

description of type **required DOMString**

A human-readable short description of the authenticator.

NOTE

This description should help an administrator configuring authenticator policies. This description might deviate from the description returned by the ASM for that authenticator.

This description should contain the public authenticator trade name and the publicly known vendor name.

authenticatorVersion of type **required unsigned short**

Earliest (i.e. lowest) trustworthy **authenticatorVersion** meeting the requirements specified in this metadata statement.

Adding new **StatusReport** entries with status **UPDATE_AVAILABLE** to the metadata **TOC** object [\[FIDOMetadataService\]](#) **must** also change this **authenticatorVersion** if the update fixes severe security issues, e.g. the ones reported by preceding **StatusReport** entries with status code **USER_VERIFICATION_BYPASS**, **ATTESTATION_KEY_COMPROMISE**, **USER_KEY_REMOTE_COMPROMISE**, **USER_KEY_PHYSICAL_COMPROMISE**, **REVOKED**.

It is **recommended** to assume increased risk if this version is higher (newer) than the firmware version present in

an authenticator. For example, if a `StatusReport` entry with status `USER_VERIFICATION BYPASS` or `USER_KEY_REMOTE_COMPROMISE` precedes the `UPDATE_AVAILABLE` entry, than any firmware version lower (older) than the one specified in the metadata statement is assumed to be vulnerable.

protocolFamily of type `DOMString`

The FIDO protocol family. The values "uaf", "u2f", and "fido2" are supported. If this field is missing, the assumed protocol family is "uaf". Metadata Statements for U2F authenticators **must** set the value of protocolFamily to "u2f" and FIDO 2.0 Authenticators implementations **must** set the value of protocolFamily to "fido2".

upv of type array of `required Version`

The FIDO unified protocol version(s) (related to the specific protocol family) supported by this authenticator. See [UAFProtocol] for the definition of the `Version` structure.

assertionScheme of type `required DOMString`

The assertion scheme supported by the authenticator. Must be set to one of the enumerated strings defined in the FIDO UAF Registry of Predefined Values [UAFRegistry] or to "FIDOV2" in the case of the FIDO 2 assertion scheme.

authenticationAlgorithm of type `required unsigned short`

The authentication algorithm supported by the authenticator. Must be set to one of the `ALG_` constants defined in the FIDO Registry of Predefined Values [FIDORegistry]. This value **must** be non-zero.

publicKeyAlgAndEncoding of type `required unsigned short`

The public key format used by the authenticator during registration operations. Must be set to one of the `ALG_KEY` constants defined in the FIDO Registry of Predefined Values [FIDORegistry]. Because this information is not present in APIs related to authenticator discovery or policy, a FIDO server **must** be prepared to accept and process any and all key representations defined for any public key algorithm it supports. This value **must** be non-zero.

attestationTypes of type array of `required unsigned short`

The supported attestation type(s). (e.g. `TAG_ATTESTATION_BASIC_FULL`) See Registry for more information [UAFRegistry].

userVerificationDetails of type array of `required VerificationMethodANDCombinations`

A list of *alternative* VerificationMethodANDCombinations. Each of these entries is one alternative user verification method. Each of these alternative user verification methods might itself be an "AND" combination of multiple modalities.

All effectively available alternative user verification methods **must** be properly specified here. A user verification method is considered effectively available if this method can be used to either:

- enroll new verification reference data to one of the user verification methods
- or
- unlock the UAuth key directly after successful user verification

keyProtection of type `required unsigned short`

A 16-bit number representing the bit fields defined by the `KEY_PROTECTION` constants in the FIDO Registry of Predefined Values [FIDORegistry].

This value **must** be non-zero.

NOTE

The keyProtection specified here denotes the effective security of the attestation key and Uauth private key and the effective trustworthiness of the attested attributes in the "sign assertion". Effective security means that key extraction or injecting malicious attested attributes is only possible if the specified protection method is compromised. For example, if keyProtection=TEE is stated, it shall be impossible to extract the attestation key or the Uauth private key or to inject any malicious attested attributes *without breaking the TEE*.

isKeyRestricted of type `boolean`

This entry is set to `true`, if the Uauth private key is restricted by the authenticator to only sign valid FIDO signature assertions.

This entry is set to `false`, if the authenticator doesn't restrict the Uauth key to only sign valid FIDO signature assertions. In this case, the calling application could potentially get any hash value signed by the authenticator.

If this field is missing, the assumed value is `isKeyRestricted=true`

NOTE

Note that only in the case of `isKeyRestricted=true`, the FIDO server can trust a signature counter or transaction text to have been correctly processed/controlled by the authenticator.

isFreshUserVerificationRequired of type `boolean`

This entry is set to **true**, if Uauth key usage *always* requires a fresh user verification.

If this field is missing, the assumed value is `isFreshUserVerificationRequired=true`.

This entry is set to **false**, if the Uauth key can be used without requiring a fresh user verification, e.g. without any additional user interaction, if the user was verified a (potentially configurable) caching time ago.

In the case of `isFreshUserVerificationRequired=false`, the FIDO server **must** verify the registration response and/or authentication response and verify that the (maximum) caching time (sometimes also called "authTimeout") is acceptable.

This entry solely refers to the user verification. In the case of transaction confirmation, the authenticator **must** always ask the user to authorize the specific transaction.

NOTE

Note that in the case of `isFreshUserVerificationRequired=false`, the calling App could trigger use of the key without user involvement. In this case it is the responsibility of the App to ask for user consent.

matcherProtection of type **required unsigned short**

A 16-bit number representing the bit fields defined by the `MATCHER_PROTECTION` constants in the FIDO Registry of Predefined Values [FIDORegistry].

This value **must** be non-zero.

NOTE

If multiple matchers are implemented, then this value must reflect the *weakest* implementation of all matchers.

The `matcherProtection` specified here denotes the effective security of the FIDO authenticator's user verification. This means that a false positive user verification implies breach of the stated method. For example, if `matcherProtection=TEE` is stated, it shall be impossible to trigger use of the Uauth private key when bypassing the user verification *without breaking the TEE*.

attachmentHint of type **required unsigned long**

A 32-bit number representing the bit fields defined by the `ATTACHMENT_HINT` constants in the FIDO Registry of Predefined Values [FIDORegistry].

NOTE

The connection state and topology of an authenticator may be transient and cannot be relied on as authoritative by a relying party, but the metadata field should have all the bit flags set for the topologies possible for the authenticator. For example, an authenticator instantiated as a single-purpose hardware token that can communicate over bluetooth should set `ATTACHMENT_HINT_EXTERNAL` but not `ATTACHMENT_HINT_INTERNAL`.

isSecondFactorOnly of type **required boolean**

Indicates if the authenticator is designed to be used only as a second factor, i.e. requiring some other authentication method as a first factor (e.g. username+password).

tcDisplay of type **required unsigned short**

A 16-bit number representing a combination of the bit flags defined by the `TRANSACTION_CONFIRMATION_DISPLAY` constants in the FIDO Registry of Predefined Values [FIDORegistry].

This value **must** be 0, if transaction confirmation is not supported by the authenticator.

NOTE

The `tcDisplay` specified here denotes the effective security of the authenticator's transaction confirmation display. This means that only a breach of the stated method allows an attacker to inject transaction text to be included in the signature assertion which hasn't been displayed and confirmed by the user.

tcDisplayContentType of type **DOMString**

Supported MIME content type [RFC2049] for the transaction confirmation display, such as `text/plain` or `image/png`.

This value **must** be present if transaction confirmation is supported, i.e. `tcDisplay` is non-zero.

tcDisplayPNGCharacteristics of type array of *DisplayPNGCharacteristicsDescriptor*

A list of *alternative* `DisplayPNGCharacteristicsDescriptor`. Each of these entries is one alternative of supported image characteristics for displaying a PNG image.

This list **must** be present if PNG-image based transaction confirmation is supported, i.e. `tcDisplay` is non-zero and `tcDisplayContentType` is `image/png`.

attestationRootCertificates of type array of **required DOMString**

Each element of this array represents a PKIX [RFC5280](#) trust root X.509 certificate that is valid for this authenticator model. Multiple certificates might be used for different batches of the same model. The array does not represent a certificate chain, but only the trust anchor of that chain.

Each array element is a base64-encoded (section 4 of [RFC4648](#)), DER-encoded [ITU-X690-2008](#) PKIX certificate value. Each element **must** be dedicated for authenticator attestation.

NOTE

A certificate listed here is a trust root. It might be the actual certificate presented by the authenticator, or it might be an issuing authority certificate from the vendor that the actual certificate in the authenticator chains to.

In the case of "uaf" protocol family, the attestation certificate itself and the ordered certificate chain are included in the registration assertion (see [UAFAuthnrCommands](#)).

Either

1. the manufacturer attestation root certificate
- or
2. the root certificate dedicated to a specific authenticator model

must be specified.

In the case (1), the root certificate might cover multiple authenticator models. In this case, it must be possible to uniquely derive the authenticator model from the Attestation Certificate. When using AAID or AAGUID, this can be achieved by either specifying the AAID or AAGUID in the attestation certificate using the extension id-fido-gen-ce-aaid { 1 3 6 1 4 1 45724 1 1 1 } or id-fido-gen-ce-aaguid { 1 3 6 1 4 1 45724 1 1 4 } or - when neither AAID nor AAGUID are defined - by using the `attestationCertificateKeyIdentifier` method.

In the case (2) this is not required as the root certificate only covers a single authenticator model.

When supporting surrogate basic attestation only (see [UAFProtocol](#), section "Surrogate Basic Attestation"), no attestation root certificate is required/used. So this array **must** be empty in that case.

ecdaaTrustAnchors of type array of [EcdaaTrustAnchor](#)

A list of trust anchors used for ECDAAtestation. This entry **must** be present if and only if attestationType includes TAG_ATTESTATION_ECDAAtestation. The entries in `attestationRootCertificates` have no relevance for ECDAAtestation. Each `ecdaaTrustAnchor` **must** be dedicated to a single authenticator model (e.g as identified by its AAID/AAGUID).

icon of type [DOMString](#)

A `data:` url [RFC2397](#) encoded PNG [PNG](#) icon for the Authenticator.

supportedExtensions[] of type [ExtensionDescriptor](#)

List of extensions supported by the authenticator.

5. Metadata Statement Format

This section is non-normative.

NORMATIVE

A FIDO Authenticator Metadata Statement is a document containing a JSON encoded [dictionary MetadataStatement](#).

5.1 UAF Example

Example of the metadata statement for an UAF authenticator with:

- authenticatorVersion 2.
- Fingerprint based user verification allowing up to 5 registered fingers, with false acceptance rate of 0.002% and rate limiting attempts for 30 seconds after 5 false trials.
- Authenticator is embedded with the FIDO User device.
- The authentication keys are protected by TEE and are restricted to sign valid FIDO sign assertions only.
- The (fingerprint) matcher is implemented in TEE.
- The Transaction Confirmation Display is implemented in a TEE.
- The Transaction Confirmation Display supports display of "image/png" objects only.
- Display has a width of 320 and a height of 480 pixel. A bit depth of 16 bits per pixel offering True Color (=Color Type 2). The zlib compression method (0). It doesn't support filtering (i.e. filter type of=0) and no interlacing support (interlace method=0).
- The Authenticator can act as first factor or as second factor, i.e. isSecondFactorOnly = false.
- It supports the "UAFV1TLV" assertion scheme.
- It uses the `ALG_SIGN_SECP256R1_ECDSA_SHA256_RAW` authentication algorithm.
- It uses the `ALG_KEY_ECC_X962_RAW` public key format (0x100=256 decimal).
- It only implements the `TAG_ATTESTATION_BASIC_FULL` method (0x3E07=15879 decimal).

- It implements UAF protocol version (upv) 1.0 and 1.1.

EXAMPLE 1: MetadataStatement for UAF Authenticator

```
{
  "aaid": "1234#5678",
  "description": "FIDO Alliance Sample UAF Authenticator",
  "authenticatorVersion": 2,
  "upv": [{ "major": 1, "minor": 0 }, { "major": 1, "minor": 1 }],
  "assertionScheme": "UAFV1TLV",
  "authenticationAlgorithm": 1,
  "publicKeyAlgAndEncoding": 256,
  "attestationTypes": [15879],
  "userVerificationDetails": [ [ { "userVerification": 2, "baDesc": {
    "FAR": 0.00002, "maxRetries": 5, "blockSlowdown": 30, "maxReferenceDataSets": 5 } } ] ],
  "keyProtection": 6,
  "isKeyRestricted": true,
  "matcherProtection": 2,
  "attachmentHint": 1,
  "isSecondFactorOnly": "false",
  "tcDisplay": 5,
  "tcDisplayContentType": "image/png",
  "tcDisplayPNGCharacteristics": [{ "width": 320, "height": 480, "bitDepth": 16,
    "colorType": 2, "compression": 0, "filter": 0, "interlace": 0 }],
  "attestationRootCertificates": [
    "MIICPTCCAAeOAwIBAgIJAQOueXvU3Oy2wMAoGCCqGSM49BAMCMHsxIDAeBgNVBAMM
    F1NhbXBsZSBDbHRlc3RhdGlubiBSb290MRYwFAYDVQQKDA1GSURPIEFsbGhbmNl
    MREwDwYDVQQLDAhVQUYyVGFHLDZSMGAgAUEBwWJUGFsbyBBbHRvMQswCQYDVQQLI
    DAUJDEtLMAKGA1UEBHMCMVVMwHhcnMTQWnJE4MTMzMzMzMzMzMzMzMzMzMzMzM
    WJBTMSAwHgYDVQDDbDByTlwbGUGQXR0ZXRpb24gUm9vdDEWMBQGA1UECgwN
    Rk1ETyBBBgGxpYw5jZTERMA8GA1UECwwIVUFGIFRXYXwEjAQBQgNVBACMCVBBhg8g
    QWx0b2ZLMAKGA1UECwAQCQExCzAJBgNVBAYTA1VTMFkwEYHKOZiZj0CAQYIKoZI
    zj0DAQcDQgAEH8hv2D0HXa59/BmpQ7RZehL/FMGzFd1QBg9vAUOpOZ3ajnuQ94PR7
    aMzH33nUSBr8fHYDrqObb58pxGqHJryX/6NQME4wHQYDVR0OBBYEFoHA3CLhxFb
    C0It7zE4w8hk5EJ/MB8GA1UdIwQYMBAAFPoHA3CLhxFbC0It7zE4w8hk5EJ/MAwG
    A1UdEwFFMAMBAf8wCgYIKoZIzj0EAwIDSAARQIhAJ06QSxt9ihIbEKYKIsPkri
    VdLIgtfbsbDSu7ErJfzr4AiBqoYCZf0+zI55aQeAHjIzA9Xm63rruAXBZ9ps9z2XN
    lQ==",
    "icon": "data:image/png;base64,
    iVBORw0KGgoAAAANSUHEUgAAAE8AAAAvCAYAAACiwJfcAAAAAXNSR0IArs4c6QAAAAARnQU1BAACx
    jw8YQUAAAJCJehZcwAADsMAAA7DAdcvqGQAAAhSURBVGhD7Zr5bxRlGMf9KzTB8AM/YEhE2W7p
    QZcwKKbclSphATLELARE7kNECCA3fkW0CKKSCFIsKBcgVCDWGNESdAYidwgggJBIRiMhFc/4wy8
    8842u9ndlnGtfzJP2n3n0++88933fveBBx+PgCzJkTUVBbLmpUDWvBTImpecCSzVXLcdX9R05Sk19
    bb5atf599fg+/eA541q47aPlLLVa9SiYVNUi8Ii8d5kGtsi30NFv7ai9n7QZPMwbdys2erU2XMq
    Udy8+ZcaNmGime8yXN3RUD3a18nF0fUlovZ+0CTzWpd2Vj+eOmlbEyy6Dx4i5pUMGWveo506q227
    dtuWBUIuffr6oWpV0FPNLh0w1751Nm2LlvPH3rVtWjffz66Lfql8tX7FR19YFSXsmSseb9ceOGbYk7
    MNucGPg8ZsbMe9rfQUaaV/JMX9sqdzDCSp0kZhmTzG9x7bLHCmNthbl6eJ+mVfQg8yaUZQNG64i
    XZ+0/kq6u0ZF00QtatdWKFxNRQ99Bj91R5OIFnk54jN0mkUiql03XDW+Ml+98mKB6tW7rWpZcPc+
    0zg4tLrYlUc86E6GdJImubVpcusearfgIYGRk6brhZVr/JcH2ooL7550jedLExopWcApi2ZUqhu
    7JLvrVsQU81zkz0PeemMRvVuQsX7PbiDQY5JvZonftK+1VY8H9utx530h0ob+jmRYqj6ouaYvEe
    nW/wlyjpb8cbwMm682tPwqWlR4tj/2SH13IRJYl4moZvXpiSqDr7dXtQHxa/PK3/+BWsKlDtGhu6V
    8tQJ3bwFkwpFrUQ050slr3levm8zZcq17+BBaw7K81EK5qzkYeakr9A8p7P3GzDK+nd3DQow+6UC
    8SVN821uv38im7NtaXtV1CVq6Rgw4pkmbdi3bu2De7YfaBBxcqfvqPrUjFQNTQ221fdUVVT68rT
    JKF5DnSmUjdgq4msS9pmsfDJR3G6ToH0iW9aV7LWLHYXKl1TDt0LTAtkYIaamp1QjVv++uyGUxV
    dJ0DNVXSM+blqRxp184ddFXlLp10/d69tsod0vs5hGre9xu8o+fpLR1cGhNTD6Z57C9KMWXefJdO
    Z94bb9oqd1R0nS7qITTzHimMqivb03g0DdVyk3WQBhBztK35YKND0nc803acS6fDZFGKaXLSJp5
    rdr1lBgp89cJcs/m7Tvs0rkjGfN4b0kPoZn3UJuIOrnz22yP1fmvUx+05gSgebV1m+zSuYNVhq7T
    WbDiLVvljplLlop6CLXP+2qtvGLIL/1vimISdMBgzSoFzyu6Tqd+jzxgsPaV9BCgee/NjYk6v61K
    9cw1Uc/SttflHdpM3b592y7h3Thx5ozK69HLPYwUwAwaq5scv26q7ceb8efVYAReP3iFU8zj1knSw
    ZXHMmncJY0Ogal7UQfSCM3qQOr2H/XFP7ssXx45Y191ByeCep4moZoH+1fG3xd4tT7x8kwyj8nw
    b9ev26V0B6d+7H4zKvudAH537FjqyzOHdJnHeuzmXq/WjxObvNMbv7nhywsX2aVsWtC8+48aLeap
    E7p5wKZi0A2AQRV5nvR4E+uJc+b61kApqInxBgmd/4V5QP/mt18HDC7sRHftmeu5lmhV0rn/ALX2
    32bqd4BFNdX7VilcWS2uff0IbB47qexxmUj9QutYjupd3tYD6abWBBMrh+apNbOKrNF1+ugCa4ri
    XGFwMPPtViavhU3YMOAAnuUb/R07L0yOsEOadE88ApsXFGff30ynhlJgM51CU6vN9EzgnpvHBFUy
    iVraePiwJ53DF5ZTznomENG85kNud2oJi2Wpr40mmkfN4x4zHfiVFc8Dv8NzuhNqOidilGvA6DGU
    eZw078AAQn6ciEk6+rw5VcvjvqNDYP0oIUwaKShrxAuXlLkH4aYuGfMYDc10WF5Ta31hpJJOcfUhr
    U/J1INi6c6eLRyDBp06++Yfjx611GNfRm4MD5rJl3FoGhNjDSBNarYUgMLyMsZKpb7tXpoHfPs8
    h3p1LzNfNk54Xxc1wDGUmYzXYefh6z/cKtVm4EBxa9VQGDzYr3LrUMRjHEKk7zaFKYQA2hgQU1
    z+85NFwPxDrkz3vx10GqxQ6BzeNboBk5n8k4nebRh+k1hWfxTF0D1EyWUS5nv+dgQqKaxzuCdE0i
    shL02N08ah0mXr12La3m0f9wik9+wLNTMY/86MPo8yi310fxmT6PwQg9+DzUkYna56mSzt5WWSy
    5qVALrUyJgXAlnzklai/gHSD7RkTy1hogAAAAABJR5ErxJggg=="
  ]
}
```

Example of an *User Verification Methods* entry for an authenticator with:

- Fingerprint based user verification method, with:
 - the ability for the user to enroll up to 5 fingers (reference data sets) with
 - a false acceptance rate of 1 in 50000 (0.002%) per finger. This results in a FAR of 0.01% (0.0001).
 - The fingerprint verification will be blocked after 5 unsuccessful attempts.
- A PIN code with a minimum length of 4 decimal digits has to be set-up as alternative verification method. Entering the PIN will be required to re-activate fingerprint based user verification after it has been blocked.

EXAMPLE 2: User Verification Methods Entry

```
[
  [ { "userVerification": 2, "baDesc": { "FAR": 0.00002, "maxReferenceDataSets": 5,
    "maxRetries": 5, "blockSlowdown": 0 } } ],
  [ { "userVerification": 4, "caDesc": { "base": 10, "minLength": 4 } } ]
]
```

5.2 U2F Example

Example of the metadata statement for an U2F authenticator with:

- authenticatorVersion 2.

- Touch based user presence check.
- Authenticator is a USB pluggable hardware token.
- The authentication keys are protected by a secure element.
- The user presence check is implemented in the chip.
- The Authenticator is a pure second factor authenticator.
- It supports the "U2FV1BIN" assertion scheme.
- It uses the `ALG_SIGN_SECP256R1_ECDSA_SHA256_RAW` authentication algorithm.
- It uses the `ALG_KEY_ECC_X962_RAW` public key format (0x100=256 decimal).
- It only implements the `TAG_ATTESTATION_BASIC_FULL` method (0x3E07=15879 decimal).
- It implements U2F protocol version 1.0 only.

EXAMPLE 3: MetadataStatement for U2F Authenticator

```
{ "description": "FIDO Alliance Sample U2F Authenticator",
  "attestationCertificateKeyIdentifiers": [ "7c0903708b87115b0b422def3138c3c864e44573" ],
  "protocolFamily": "u2f",
  "authenticatorVersion": 2,
  "upv": [ { "major": 1, "minor": 0 } ],
  "assertionScheme": "U2FV1BIN",
  "authenticationAlgorithm": 1,
  "publicKeyAlgAndEncoding": 256,
  "attestationTypes": [ 15879 ],
  "userVerificationDetails": [ [ { "userVerification": 1 } ] ],
  "keyProtection": 10,
  "matcherProtection": 4,
  "attachmentHint": 2,
  "isSecondFactorOnly": "true",
  "tcDisplay": 0,
  "attestationRootCertificates": [
    "MIICPTCCAAeOgAwIBAgIJA0uexvU3Oy2wMAoGCCqGSM49BAMCMHsxIDAeBgNVBAMM
    F1NhbmBzZSBBdHRlc3RhdGlvbiBSb290MRYwFAYDVQQKDA1GSURPIEFsbGhbmNl
    MREwDwYDVQQLEDAhVQUyGvVdHLDSEMBAGA1UEBwwJUGFsbyBBbHRvMQswCQYDVQQL
    DAJDQTELMakGA1UEBhMCVVMwHhcNMjQwNjE4MTMzMzMyWWhcNDEwMTAzMjQwNjE4
    WjB7MSAwHgYDVQDDbDdTYWlwbGUgQXR0ZXN0YXRpb24gUm9vdDEWMBQGA1UECgwN
    RklETyBBbGxpbG91ZjZTERMA8GA1UECwwIVUFGIFRyXyxEjAQBgNVBAcMCVBhbG8g
    QWx0b2ZELMAkGA1UECAwCQ0ExCzAJBgNVBAYTA1VTMFkwEwYHKoZIzj0CAQYIKoZI
    zj0DAQcDQgAEH8hv2D0HXa59/BmpQ7RZehL/FMGzFd1QBg9vAUPOZ3ajnuQ94PR7
    aMzH33nUSBr8fHYDrq0Bb58pxGqHJryX/6NQME4wHQYDVR0OBBYEFoHA3CLhxFb
    C0It7zE4w8hk5EJ/MB8GA1UdIwQYMBaAFPoHA3CLhxFbC0It7zE4w8hk5EJ/MAwG
    A1UdEwQFMAMBAf8wCgYIKoZIzj0EAwIDSAARQIhAJ06QSXt9ihTbEKYKIjsPkri
    VdLIgtfsbDSu7ErJfzr4A1BqoYCZf0+zI55aQeAHjIzA9Xm63rruAxBZ9ps9z2XN
    lQ=="]
}
```

6. Additional Considerations

This section is non-normative.

6.1 Field updates and metadata

Metadata statements are intended to be stable once they have been published. When authenticators are updated in the field, such updates are expected to improve the authenticator security (for example, improve FRR or FAR). The `authenticatorVersion` must be updated if firmware updates fixing severe security issues (e.g. as reported previously) are available.

NOTE

The metadata statement is assumed to relate to all authenticators having the same AAID.

NOTE

The FIDO Server is recommended to assume increased risk if the `authenticatorVersion` specified in the metadata statement is newer (higher) than the one present in the authenticator.

NORMATIVE

Significant changes in authenticator functionality are not anticipated in firmware updates. For example, if an authenticator vendor wants to modify a PIN-based authenticator to use "Speaker Recognition" as a user verification method, the vendor **must** assign a new AAID to this authenticator.

NORMATIVE

A single authenticator implementation could report itself as two "virtual" authenticators using different AAIDs. Such implementations **must** properly (i.e. according to the security characteristics claimed in the metadata) protect `UAuth` keys and other sensitive data from the other "virtual" authenticator - just as a normal authenticator would do.

NOTE

Authentication keys (`UAuth.pub`) registered for one AAID cannot be used by authenticators reporting a different AAID

- even when running on the same hardware (see section "Authentication Response Processing Rules for FIDO Server" in [UAFProtocol]).

A. References

A.1 Normative references

- [ISO19795-1]
ISO/IEC JTC 1/SC 37, *Information Technology - Biometric performance testing and reporting - Part 1: Principles and framework*, URL: http://www.iso.org/iso/catalogue_detail.htm?csnumber=41447
- [ISO30107-1]
ISO/IEC JTC 1/SC 37, *Information Technology - Biometrics - Presentation attack detection - Part 1: Framework*, URL: http://www.iso.org/iso/catalogue_detail.htm?csnumber=53227
- [RFC2049]
N. Freed, N. Borenstein, *Multipurpose Internet Mail Extensions (MIME) Part Five: Conformance Criteria and Examples (RFC 2049)*, IETF, November 1996, URL: <http://www.ietf.org/rfc/rfc2049.txt>
- [RFC2119]
S. Bradner, *Key words for use in RFCs to Indicate Requirement Levels* March 1997. Best Current Practice. URL: <https://tools.ietf.org/html/rfc2119>
- [RFC2397]
L. Masinter, *The "data" URL scheme*, August 1998. Proposed Standard. URL: <https://tools.ietf.org/html/rfc2397>
- [WebIDL-ED]
Cameron McCormack, *Web IDL*, W3C. Editor's Draft 13 November 2014. URL: <http://heycam.github.io/webidl/>

A.2 Informative references

- [AndroidUnlockPattern]
Android Unlock Pattern Security Analysis, Sinustrom.info web site. URL: <http://www.sinustrom.info/2012/05/21/android-unlock-pattern-security-analysis/>
- [ECMA-262]
ECMAScript Language Specification, URL: <https://tc39.github.io/ecma262/>
- [FIDOECdaaAlgorithm]
R. Lindemann, A. Edgington, R. Urian, *FIDO ECDA Algorithm*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-ecdaa-algorithm-ps-20141208-v1.1-rd-20160915.html>
PDF: <fido-ecdaa-algorithm-ps-20141208-v1.1-rd-20160915.pdf>
- [FIDOGlossary]
R. Lindemann, D. Baghdasaryan, B. Hill, J. Hodges, *FIDO Technical Glossary*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-glossary-v1.1-rd-20160915.html>
PDF: <fido-glossary-v1.1-rd-20160915.pdf>
- [FIDOKeyAttestation]
FIDO 2.0: Key attestation format URL: <fido-key-attestation.html>
- [FIDOMetadataService]
R. Lindemann, B. Hill, D. Baghdasaryan, *FIDO Metadata Service v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-metadata-service-v1.1-rd-20160915.html>
PDF: <fido-metadata-service-v1.1-rd-20160915.pdf>
- [FIDORegistry]
R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO Registry of Predefined Values*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-registry-v1.1-rd-20160915.html>
PDF: <fido-registry-v1.1-rd-20160915.pdf>
- [ITU-X690-2008]
X.690: Information technology - ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER), (T-REC-X.690-200811), International Telecommunications Union, November 2008 URL: <http://www.itu.int/rec/T-REC-X.690-200811-I/en>
- [MoreTopWorstPasswords]
10000 Top Passwords, Mark Burnett (Accessed July 11, 2014) URL: <https://xato.net/passwords/more-top-worst-passwords/>
- [PNG]
Tom Lane, *Portable Network Graphics (PNG) Specification (Second Edition)*, 10 November 2003. W3C Recommendation. URL: <https://www.w3.org/TR/PNG>
- [RFC4648]
S. Josefsson, *The Base16, Base32, and Base64 Data Encodings (RFC 4648)*, IETF, October 2006, URL: <http://www.ietf.org/rfc/rfc4648.txt>
- [RFC5280]
D. Cooper, S. Santesson, S. Farrell, S. Boeyen, R. Housley, W. Polk, *Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile*, IETF, May 2008, URL: <http://www.ietf.org/rfc/rfc5280.txt>
- [UAFAuthnrCommands]
D. Baghdasaryan, J. Kemp, R. Lindemann, R. Sasson, B. Hill, *FIDO UAF Authenticator Commands v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-uaf-authnr-cmds-v1.1-id-20150902.html>
PDF: <fido-uaf-authnr-cmds-v1.1-id-20150902.pdf>
- [UAFProtocol]
R. Lindemann, D. Baghdasaryan, E. Tiffany, D. Balfanz, B. Hill, J. Hodges, *FIDO UAF Protocol Specification v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-uaf-protocol-v1.1-id-20150902.html>
PDF: <fido-uaf-protocol-v1.1-id-20150902.pdf>
- [UAFRegistry]
R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO UAF Registry of Predefined Values*. FIDO Alliance Proposed Standard. URLs:
HTML: <fido-uaf-reg-v1.1-id-20150902.html>
PDF: <fido-uaf-reg-v1.1-id-20150902.pdf>
- [WebIDL]
Cameron McCormack; Boris Zbarsky, *WebIDL Level 1*, 15 September 2016. W3C Proposed Recommendation. URL:

<https://www.w3.org/TR/WebIDL-1/>
[iPhonePasscodes]

[Most Common iPhone Passcodes](#), Daniel Amitay (Accessed July 11, 2014) URL:
<http://danielamitay.com/blog/2011/6/13/most-common-iphone-passcodes>

Processing math: 100%