

Perfect water pressure




Just when you need it

For drainage

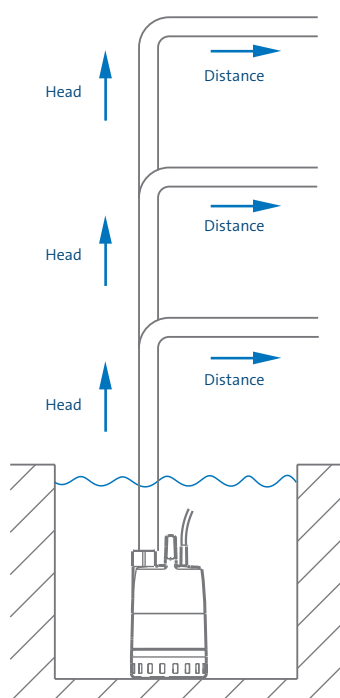
Waste water – Pump selection

Use the table below to select the best Grundfos pump for any type of water supply task.
Once you've settled on a pump model, use the corresponding sizing guide to get the perfect fit.

Drainage

Max. solid size [mm]			
 Drainage For portable use or permanent installation, clean or greywater and salt water*	Light duty	10 mm	UNILIFT CC
		10 mm	UNILIFT KP
	Heavy duty	12 mm	UNILIFT AP12
 Effluent Surface- and rainwater as well as greywater from sanitary appliances		35 mm	UNILIFT AP35
		35 mm	UNILIFT AP35B
		50 mm	UNILIFT AP50
 Sewage/Domestic wastewater Domestic wastewater with toilet discharge		50 mm	UNILIFT AP50B
			UNILIFT APG (grinder)

Drainage – Quick sizing



Ex. sizing and selection

1. Select the best Grundfos pump for the type of wastewater task you need to solve:

- Use the table on previous page

2. Find the right pump:

- How head: 9 m

- How long distance: 400 m

3. Result: **AP12.50.11**

AP12.40.08		AP12.50.11
Head \ Distance		
14 m		Max. 95 m
12 m	Max. 1 m	Max. 200 m
10 m	Max. 150 m	Max. 410 m
8 m	Max. 310 m	Max. 620 m



UNILIFT CC

The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.

	CC 5	CC 7	CC 9
Head \ Distance			
7 m			Max. 45 m
6 m			Max. 80 m
5 m		Max. 15 m	Max. 115 m
4.5 m		Max. 35 m	Max. 130 m
4 m		Max. 50 m	Max. 150 m
3 m		Max. 80 m	Max. 180 m
2.5 m	Max. 10 m	Max. 100 m	Max. 200 m
2 m	Max. 25 m	Max. 110 m	Max. 215 m

Drainage

– Quick sizing



UNILIFT KP

The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.

	KP 150	KP 250	KP 350
Head \ Distance			
7 m			Max. 25 m
6 m		Max. 20 m	Max. 60 m
5 m		Max. 50 m	Max. 95 m
4 m		Max. 85 m	Max. 130 m
3.5 m	Max. 15 m	Max. 105 m	Max. 145 m
3 m	Max. 30 m	Max. 120 m	Max. 160 m
2 m	Max. 65 m	Max. 160 m	Max. 195 m



UNILIFT AP12

The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.

	AP12.40.04	AP12.40.06	AP12.40.08	AP12.50.11
Head \ Distance				
14 m				Max. 8 m
12 m			Max. 40 m	Max. 115 m
10 m		Max. 60 m	Max. 130 m	Max. 250 m
8 m	Max. 45 m	Max. 150 m	Max. 220 m	Max. 370 m
6 m	Max. 135 m	Max. 240 m	Max. 310 m	Max. 490 m
4 m	Max. 225 m	Max. 330 m	Max. 400 m	Max. 610 m
2 m	Max. 320 m	Max. 420 m	Max. 495 m	Max. 735 m

Drainage

– Quick sizing



UNILIFT AP35

The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.

	AP35.40.06	AP35.40.08
Head\Distance		
9 m		Max. 30 m
8 m		Max. 75 m
7 m	Max. 35 m	Max. 120 m
6 m	Max. 80 m	Max. 165 m
5 m	Max. 130 m	Max. 215 m
4 m	Max. 170 m	Max. 255 m
3 m	Max. 220 m	Max. 305 m
2 m	Max. 265 m	Max. 350 m



UNILIFT AP35B

The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.

	AP35B.50.06	AP35B.50.08
Head\Distance		
9 m		Max. 15 m
8 m		Max. 75 m
7 m	Max. 20 m	Max. 135 m
6 m	Max. 80 m	Max. 195 m
5 m	Max. 140 m	Max. 260 m
4 m	Max. 200 m	Max. 320 m
3 m	Max. 260 m	Max. 385 m
2 m	Max. 325 m	Max. 440 m

Drainage

– Quick sizing

 UNILIFT AP50	The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.	
	AP50.50.08	AP50.50.11
	Head\Distance	
	9 m	Max. 55 m
	8 m	Max. 115 m
	7 m	Max. 45 m
	6 m	Max. 105 m
	5 m	Max. 165 m
	4 m	Max. 225 m
	3 m	Max. 285 m
	2 m	Max. 350 m

 UNILIFT AP50B	The selection and sizing illustration is based on an inner diameter of a DN 32 discharge pipe and secure a self cleaning velocity inside the pipe.		
	AP50B.50.08	AP50B.50.11	AP50B.50.15
	Head\Distance		
	14 m		Max. 65 m
	12 m		Max. 190 m
	11 m	Max. 25 m	Max. 250 m
	10 m	Max. 85 m	Max. 310 m
	9 m	Max. 145 m	Max. 370 m
	8 m	Max. 45 m	Max. 205 m
	6 m	Max. 165 m	Max. 330 m
	5 m	Max. 225 m	Max. 390 m
	4 m	Max. 285 m	Max. 450 m
	3 m	Max. 345 m	Max. 480 m
	2 m	Max. 490 m*	Max. 740 m*

*The pumps shall not operate for longer time with this Head

Drainage

– Quick sizing

 UNILIFT APG 40.10	The quick sizing chart below gives an approximate overview of heights and outlet pipe lengths with an inner pipe diameter of DN 32, G 1 1/2" / DN 40, and a flow, so that a self-cleaning velocity of minimum 0.7 m/s is covered.		
	Head\Distance	DN32/40	DN32/40
	22	Max. 25/35 m	
	20	Max. 90/120 m	
	18	Max. 160/215 m	Max. 19/25 m
	16	Max. 225/305 m	Max. 40/55 m
	14	Max. 295/395 m	Max. 65/90 m
	12	Max. 360/485 m	Max. 90/120 m
	10	Max. 430/575 m	Max. 115/150 m
	8	Max. 495/665 m	Max. 135/185 m
	6	Max. 565/755 m	Max. 160/215 m
	4	Max. 630/850 m	Max. 185/250 m
	2	Max 700/940 m	Max. 210/280 m
	Flow	Q=2.1/3.2 m ³ /h (v=0.7 m/s)	Q= 3.6/5.4 m ³ /h (v=1.2 m/s)

The overview is only intended as a guide.

Grundfos is not liable for installations that do not comply with the overview. Pressure loss of anon-re-turn valve and an isolating valve is calculated. The vertical height of the outlet pipe must be measured from the pump stop level. For more flow requirements a calculation is needed.