

+ 2019 Doohan Price list

TO
FUTURE
TRANSPORTATION



www.doohan-ev.com

Date: 11th, Mar. 2019

Price list

model	Spec.	FOB Ningbo, China	Note
iTango Classic 25KM version	LG lithium cell battery, 48V, 20Ah, Bosch Motor, 1000W, charger: 5A, 25Km version	USD1050.00	Color options: Black, Blue, Green, Red, White
iTango HO 45KM version	LG lithium cell battery, 48V, 26Ah, Bosch Motor, 1200W, charger: 5A, 45Km version, with VCU	USD1250.00	Color options: Black, Blue, Green, Red, White
iTank 70km	Double Batteries, LG lithium cell, 60V, 26Ah, Bosch/QS Motor, 3000W, charger: 10A, 70Km version	USD2150.00	Color options: Black, Blue, Yellow, Red, White
iTank 45km	Double Batteries, LG lithium cell, 60V, 26Ah, Bosch Motor, 1500W, charger: 5A, 45Km version	USD2000.00	Color options: Black, Blue, Yellow, Red, White
iTank 45km	Single Battery, LG lithium cell, 60V, 26Ah, Bosch Motor, 1500W, charger: 5A, 45Km version	USD1550.00	Color options: Black, Blue, Yellow, Red, White
Pizza delivery	Single Battery, LG lithium cell, 60V, 26Ah, Bosch Motor, 2000W, charger: 5A, 45Km version Without Tail box	USD980.00	Color options: Black, White
E-Swan	Single Battery, LG lithium cell, 60V, 20Ah, Bosch Motor, 1200W, charger: 5A, 45Km version	USD890.00	Color options: Black, White

Price list

Note:

1, the above price is basing on the exchange rate RMB and USD: 6.90:1, if the exchange rate change within 5%, the price maintain, if exceed 5%, the price will be adjusted accordingly;

2,the above price is for the standard condition, it doesn't include the tail box or side box;

3,the above price is basing on FOB NINGBO port, if the loading port changed, the price might be adjusted accordingly;

4,the above price is applied to the new orders since 11th, Mar., 2019, valid for 12months;

iTango Technical Parameter

Dimension	1648*651*1110mm	
Wheelbase	1150mm	
Front track	460mm	
Rated voltage	48V	
Max loading weight	154kg	
Model	iTango Classic	iTango HO
Battery	48V20AH Lithium Battery	48V26AH Lithium Battery
Motor	1200W(Rated power)BOSCH Motor	1200W(Rated power)BOSCH Motor
Rim	Aluminum	Aluminum
Braking	Three Hydraulic Disc Brake	Three Hydraulic Disc Brake
Range	50km(25km/h)	50km(45km/h),70KM(25km/h)
speed	25km/h(Standard&Limited speed mode)	25km/h(Limited speed mode)
	45km/h(Optional)	45km/h(Max speed mode)
Color	Red, Black, White	Red, Black, White, Green, Blue
Intelligent system	No	D-master 2.0-Plus
Dashboard	LCD	LCD
Front Suspension system	DDWT-S	DDWT-S
Cruise Control	Y	Y
Keyless starting	Y (With Directional Lock)	Y (With Directional Lock)
Charge time/Quick Charge	5H/Y	5.5H/Y
Charge	3A	5A
Roll-Lock System	Y	Y
Front shock absorber	Sleeve, oil damping	Sleeve, oil damping
Rear shock absorber	Sleeve, oil damping	Sleeve, oil damping
Cushion Height	740mm	740mm
Max leaning angle	≤30°	≤30°
Maximum steering angle	≤34°	≤34°
Maximum drop height of front wheel	180mm	180mm
Battery weight	10KG	10KG
Battery protection system	Over discharge protection, short-circuit protection, temperature protection, overcharge protection, overcurrent protection, balance protection of battery	

iTank Technical Parameter

Items	Single Battery System	Dual-Batteries System(45km/h)	Dual-Batteries System(70km/h)
Size:L*W*H	1780mm*730mm*1030mm	1780mm*730mm*1030mm	1780mm*730mm*1030mm
Wheel Base	1250mm	1250mm	1250mm
Track Front	460mm	460mm	460mm
Curb Weight	99KG	108KG	108KG
Rated Voltage	60V	60V	60V
Maximum loading	160KG	160KG	160KG
Gradeability	≤25% (Loading:176 lbs)	≤25% (Loading:176 lbs)	≤25% (Loading:176 lbs)
Standard Power Consumption	1.7KW/H	1.7KW/H	1.7KW/H
Range	45KM(45km/h) 70KM(25km/h)	90KM(45km/h) 140KM(25km/h)	60KM(70km/h)
Top Speed	First Gear:25km/h Second Gear:45km/h	First Gear:25km/h Second Gear:45km/h	70km/h(Max speed)
Braking Distance	Dry Road:≤2m(20km/h) ≤3.5m (30km/h) Dry Road:≤3.5m(30km/h) ≤4m (30km/h)	Dry Road:≤2m(20km/h) ≤3.5m (30km/h) Dry Road:≤3.5m(30km/h) ≤4m (30km/h)	Dry Road:≤2m(20km/h) ≤3.5m (30km/h) Dry Road:≤3.5m(30km/h) ≤4m (30km/h)
Front Absorber	Sleeve.Oil Damping Type	Sleeve.OilDamping Type	Sleeve.OilDamping Type
Rear Absorber	Sleeve.Oil Damping Type	Sleeve.OilDamping Type	Sleeve.OilDamping Type
Front Tire	80/100-12*2	90/90-12*2	90/90-12*2
Rear Tire	120/70-12	120/70-12	120/70-12
Front Brake Model	160mm.Dual-piston Hydraulic Disc Brake	160mm.Dual-piston Hydraulic Disc Brake	160mm.Dual-piston Hydraulic Disc Brake
Rear Brake Model	190mm.Dual-piston Hydraulic Disc Brake	190mm.Dual-piston Hydraulic Disc Brake	190mm.Dual-piston Hydraulic Disc Brake
Minimum Ground Clearance	130mm	130mm	130mm
Seat Hight	750mm	750mm	750mm
Maximum Leaning Angle	≤30°	≤30°	≤30°
Maximum steering Angle	≤32.5°	≤32.5°	≤32.5°

Battery System

Battery Type	18650 Ternary Lithium Battery	18650 Ternary Lithium Battery	18650 Ternary Lithium Battery
Voltage	60V	60V	60V
Battery Capacity	26AH	26AH*2	26AH*2
Standard Charge Current	4A	4A	4A
Maximum Discharge Current	75A	75A	75A
Standard Charging Time	6A~7A	6A~7A*2	6A~7A*2
Battery Weight	9KG	9KG*2	9KG*2
Charge&Discharge Times	600 times	600 times	600 times
Ambient Temperature Range,Battery Using	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Ambient Temperature Range,Battery Store	-20°C to 60°C	-20°C to 60°C	-20°C to 60°C
Ambient Temperature Range,Battery Charging	0°C to 45°C	-20°C to 60°C	-20°C to 60°C
Battery Protection System	over discharge protection	over discharge protection	over discharge protection
	short-circuit protection	short-circuit protection	short-circuit protection
	temperature protection	temperature protection	temperature protection
	overcharge protection	overcharge protection	overcharge protection
	overcurrent protection	overcurrent protection	overcurrent protection
	balance protection of battery	balance protection of battery	balance protection of battery

Motor System

Motor Type	BOSCH	BOSCH	QS/BOSCH
Rated Power	1490W	1490W	3000W



iTango

www.doohan-ev.com
www.doohanus.com

iTango




Color options:



The First Smart E-Scooter
of Dual-Front-Wheel in
China

iTank

iTank

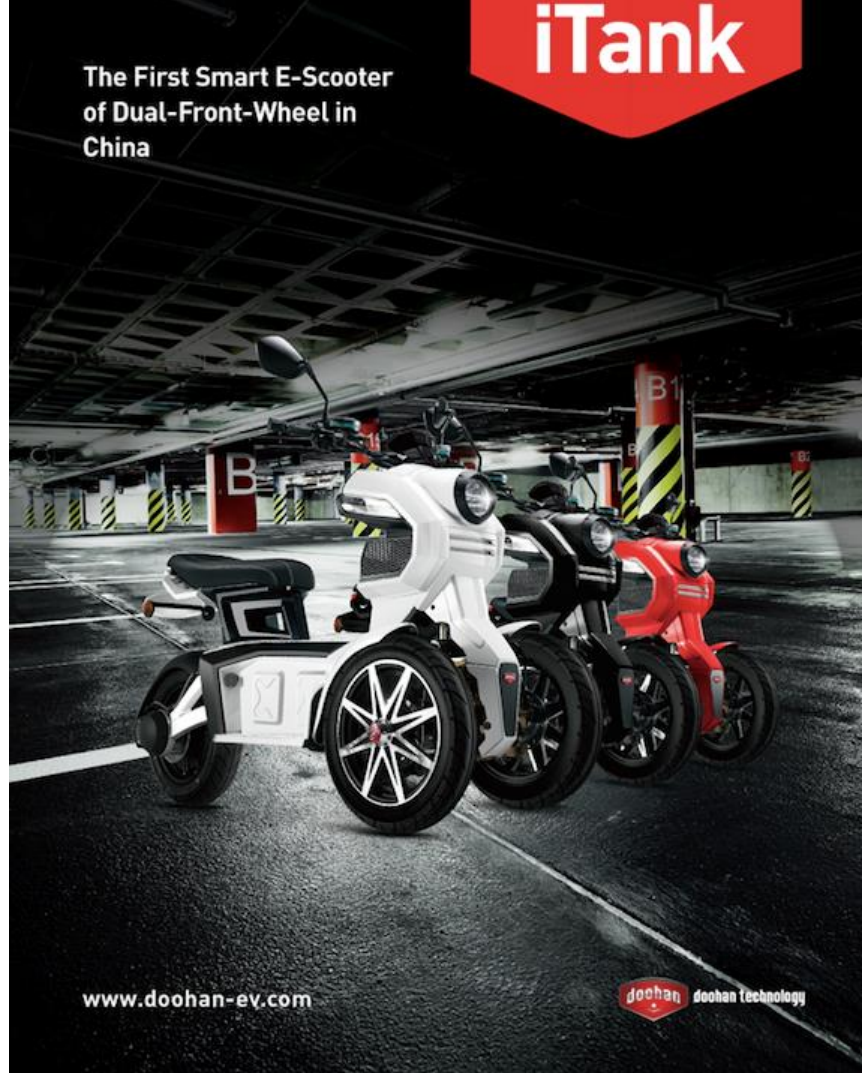

www.doohan-ev.com



**TO FUTURE
TRANSPORTATION**

iTank



Color options:

Pizza Delivery



Pizza Delivery



Model Name	Pizza/GDL04(EEC)
Motor	1200/2000 watts DC Brushless motor
Frame	steel frame with high quality roast paint
Battery	60V20Ah/60V26Ah lithium battery
Brake system	F: Disc Brake R: Disc Brake
Tire	F:90/90-12 R:120/70-12 Tubeless Tire
Charger	110V/220V 50~60HZ
Loading capacity	150kgs
Dimension	1850 (L) × 650 (W) × 1150 (H)mm
QTY in container	24PCS/PCS/20ft 48PCS/40ft
Max speed	45 KM/H
Running distance	≥ 50

E-Swan



E-Swan



Motor	60V1200W
Battery	60V20AH lithium battery/60V40AH
Battery life	600 times
Max Speed	45km/h
Range	100km Economic speed/180km
Controller	SINE-WAVE Controller
Charging time	5h
Tyres	3.0-10
Brake	FR Disc Brake,RR Drum Brake
Climbing slope	≥12°
Size	1670mm×650mm×1055mm
FCL Qty	24PCS/20GP,52PCS/20GP

TO FUTURE TRANSPORTATION

Date:2018/10/20

LSSUED BY: ZHEJIANG DOOHAN TECHNOLOGY CO.,LTD

www.doochan-ev.com