



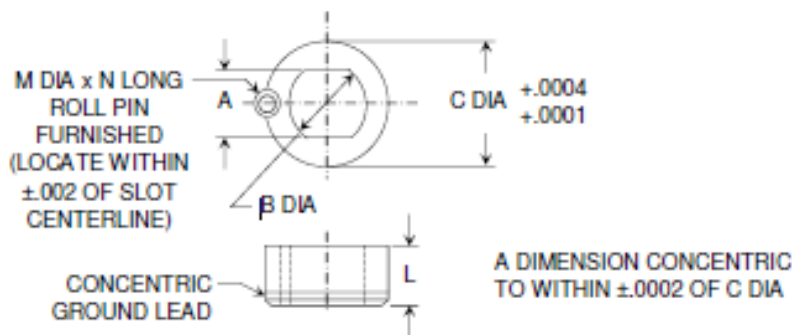

AVAILABLE MATERIAL:

- Standard : Tool steel, Heat treated to Rc 58-62
- Carbide: Add '-C' to part number
- Stainless Steel : Add '-SS' to part number

CALLOUT:

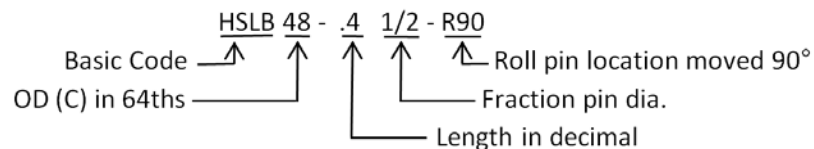

PART NUMBER	PIN DIA	A	B DIA	C DIA	L	M DIA	N
HSLB48-.4 1/8	1/8	.1251-.1257	0.250	0.7500	0.40	3/16	3/8
HSLB48-.4 #30	#30	.1286-.1292	0.312	0.7500	0.40	3/16	3/8
HSLB48-.4 5/32	5/32	.1563-.1569	0.312	0.7500	0.40	3/16	3/8
HSLB48-.4 #11	#11	.1911-.1917	0.312	0.7500	0.40	3/16	3/8
HSLB32-.4 #10-R90*	#10	.1936-.1942	0.312	0.5000	0.40	3/16	3/8
HSLB48-.4 #10-R90*	#10	.1936-.1942	0.312	0.7500	0.40	3/16	3/8
HSLB48-.4 #9	#9	.1961-.1967	0.312	0.7500	0.40	3/16	3/8
HSLB48-.4 7/32	7/32	.2189-.2195	0.375	0.7500	0.40	3/16	3/8
HSLB26-.37 1/4-R90*	1/4	.2501-.2507	0.297	0.4059 - 0.4062**	0.37	Supplied w/ 0.62 x .37 dowel pin	
HSLB32-.4 1/4-R90*	1/4	.2501-.2507	0.375	0.5000	0.40	3/16	3/8
HSLB64-.4 F	F	.2571-.2577	0.375	1.0000	0.40	3/16	3/8
HSLB64-.4 9/32	9/32	.2813-.2819	0.437	1.0000	0.40	3/16	3/8
HSLB48-.4 1/2-R90*	1/2	.5001-.5007	0.625	0.7500	0.40	3/16	3/8

* Thinwall, roll pin location moved 90°. Thinwall slotted bushings in thin edge distance applications and in common tool hole sizes.

** Thinwall, slip fit OD

CAD AVAILABLE
[Click here to request CAD](#)

