


INDEX

PR ODUCT	PAGE
Hex Socket Head Cap Screws "1960 Series", Inch Sizes.....	F.1
Hex Socket Head Cap Screws "1960 Series", Inch Sizes, UNC Thread, Alloy Steel	F.2 - F.3
Hex Socket Head Cap Screws "1960 Series", Inch Sizes, UNF Thread, Alloy Steel	F.4
Hex Socket Head Cap Screws "1960 Series", Inch Sizes, UNC & UNF Thread, Stainless Steel	F.5
Hex Socket Head Cap Screws, Metric Thread, Grade ISO 12.9	F.6
Hex Socket Head Cap Screws, Metric Thread, Stainless Steel	F.7
Flat Head Hex Socket Cap Screws, Inch Sizes, UNC Thread	F.8
Flat Head Hex Socket Cap Screws, Inch Sizes, UNC Thread, Alloy Steel	F.9 - F.10
Flat Head Hex Socket Cap Screws, Inch Sizes, UNC Thread, Stainless Steel	F.11
Flat Head Hex Socket Cap Screws, Metric Sizes, 90° Head Angle	F.12 - F.13
Button Head Hex Socket Cap Screws, Inch Sizes, UNC Threads	F.14
Button Head Hex Socket Cap Screws, Inch Sizes, UNC & UNF Threads, Alloy Steel	F.15
Button Head Hex Socket Cap Screws, UNC & UNF Threads, Stainless Steel.....	F.16
Button Head Hex Socket Cap Screws, Metric Sizes, Thread Class 4g 6g, Alloy Steel	F.17
Button Head Hex Socket Cap Screws, Thread Class 4g 6g, Stainless Steel	F.18
Low-Head Socket Cap Screws, Inch Sizes, Thread Class Fit 3A	F.19
Low-Head Socket Cap Screws GR.10.9, Metric Sizes, Thread Class Fit 3A	F.20
Hex Socket Set Screws, Alloy Steel	F.21 - F.22
Hex Socket Set Screws, Various Points, Inch Sizes, Alloy Steel	
Knurled Cup Point	F.23
Flat Point	F.23
Oval Point	F.23
Cone Point	F.24
Half Dog Point	F.24
Hex Socket Set Screws, Cup Point, Inch Sizes, Stainless Steel.....	F.25
Hex Socket Set Screws, Various Points, Inch Sizes, Stainless Steel	
Flat Point	F.26
Oval Point	F.26
Cone Point.....	F.27
Half Dog Point	F.27
Hex Socket Set Screws, Various Points, Metric Sizes, Alloy Steel	F.28
Hex Socket Set Screws, Metric Sizes, Stainless Steel	F.29
Hex Socket Set Screws, Various Points, Metric Sizes, Stainless Steel.....	F.30
Hex Socket Set Screws , Various Points, Metric Sizes, Stainless Steel.....	F.31
Hex Socket Shoulder Screws, Precision 1, Inch Sizes, Alloy Steel	F.32
Hex Socket Shoulder Screws, Precision 1, Metric Sizes, Alloy Steel	F.33 - F.34
Hex Socket Shoulder Screws, Precision 2, Inch Sizes, Alloy Steel	F.35 - F.36
Hex Socket Shoulder Screws, Precision 2, Metric Sizes, Alloy Steel	F.37 - F.38
Hexagon Keys, Inch Sizes, Alloy Steel	F.39
Hexagon Keys, Metric Sizes, Alloy Steel.....	F.40
Spring Tension Pins (Roll Pins), ANSI B18.8.2 1978, Inch Sizes	F.41
Spring Tension Pins (Roll Pins), ISO 8752, Metric Sizes	F.42
Spring Tension Pins (Roll Pins), Inch Sizes, Stainless Steel	F.43

HEX SOCKET HEAD CAP SCREWS "1960 SERIES"

INCH SIZES, DIMENSIONS & SPECIFICATIONS

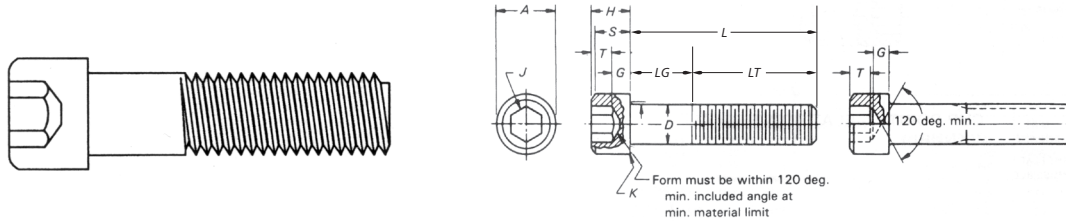

Nominal Size or Basic Screw Diameter		D		A		H		S	J		T	G	K	LT
		Body Diameter		Head Diameter		Head Height		Head Side Height	Hexagon Socket Size		Key En- gagement	Wall Thickness	Chamfer or Radius	Basic Thread Length
		Max.	Min.	Max.	Min.	Max.	Min.	Min.	Nom.		Min.	Min.	Max.	Min.
0	0.0600	0.0600	0.0568	0.096	0.091	0.060	0.057	0.054	0.050		0.025	0.020	0.003	.62
1	0.0730	0.0730	0.0695	0.118	0.112	0.073	0.070	0.066	1/16	0.062	0.031	0.025	0.003	.62
2	0.0860	0.0860	0.0822	0.140	0.134	0.086	0.083	0.077	5/64	0.078	0.038	0.029	0.003	.62
3	0.0990	0.0990	0.0949	0.161	0.154	0.099	0.095	0.089	5/64	0.078	0.044	0.034	0.003	.62
4	0.1120	0.1120	0.1075	0.183	0.176	0.112	0.108	0.101	3/32	0.094	0.051	0.038	0.005	.75
5	0.1250	0.1250	0.1202	0.205	0.198	0.125	0.121	0.112	3/32	0.094	0.057	0.043	0.005	.75
6	0.1380	0.1380	0.1329	0.226	0.218	0.138	0.134	0.124	7/64	0.109	0.064	0.047	0.005	.75
8	0.1640	0.1640	0.1585	0.270	0.262	0.164	0.159	0.148	9/64	0.141	0.077	0.056	0.005	.88
10	0.1900	0.1900	0.1840	0.312	0.303	0.190	0.185	0.171	5/32	0.156	0.090	0.065	0.005	.88
1/4	0.2500	0.2500	0.2435	0.375	0.365	0.250	0.244	0.225	3/16	0.188	0.120	0.095	0.008	1.00
5/16	0.3125	0.3125	0.3053	0.469	0.457	0.312	0.306	0.281	1/4	0.250	0.151	0.119	0.008	1.12
3/8	0.3750	0.3750	0.3678	0.562	0.550	0.375	0.368	0.337	5/16	0.312	0.182	0.143	0.008	1.25
7/16	0.4375	0.4375	0.4294	0.656	0.642	0.438	0.430	0.394	3/8	0.375	0.213	0.166	0.010	1.38
1/2	0.5000	0.5000	0.4919	0.750	0.735	0.500	0.492	0.450	3/8	0.375	0.245	0.190	0.010	1.50
5/8	0.6250	0.6250	0.6163	0.938	0.921	0.625	0.616	0.562	1/2	0.500	0.307	0.238	0.010	1.75
3/4	0.7500	0.7500	0.7406	1.125	1.107	0.750	0.740	0.675	5/8	0.625	0.370	0.285	0.010	2.00
7/8	0.8750	0.8750	0.8647	1.312	1.293	0.875	0.864	0.787	3/4	0.750	0.432	0.333	0.015	2.25
1	1.0000	1.0000	0.9886	1.500	1.479	1.000	0.988	0.900	3/4	0.750	0.495	0.380	0.015	2.50
1-1/8	1.1250	1.1250	1.1086	1.688	1.665	1.125	1.111	1.012	7/8	0.875	0.557	0.428	0.015	3.12
1-1/4	1.2500	1.2500	1.2336	1.875	1.852	1.250	1.236	1.125	7/8	0.875	0.620	0.475	0.015	3.16
1-3/8	1.3750	1.3750	1.3568	2.062	2.038	1.375	1.360	1.237	1	1.000	0.682	0.523	0.015	3.44
1-1/2	1.5000	1.5000	1.4818	2.250	2.224	1.500	1.485	1.350	1	1.000	0.745	0.570	0.015	3.75
1-3/4	1.7500	1.7500	1.7295	2.625	2.597	1.750	1.734	1.575	1-1/4	1.250	0.870	0.665	0.015	4.38
2	2.0000	2.0000	1.9780	3.000	2.970	2.000	1.983	1.800	1-1/2	1.500	0.995	0.760	0.015	5.00

1. BODY DIAMETER (D) refers to the unthreaded cylindrical portion of the screw.

2. HEADS may be plain or knurled at our option.

3. HEAD CHAMFER (E). The heads shall be flat and chamfered. The chamfer (E) shall be 30° - 45°.

4. SCREW POINTS of sizes #8 and larger shall be chamfered.

5. FILLET (F). For all lengths of screws the form of the underhead fillet shall be optional, provided it is a smooth and continuous concave curve fairing into the bearing surface of the head and the screw shank within the tolerances listed for (F).

6. THREADS. Diameters to 1" are UNRC and UNRF, class 3A. Diameters over 1" are UNRC and UNRF, class 2A.

7. MATERIAL.

(A) Steel, high grade alloy, hardened by quenching in oil from the hardening temperature and tempered to a specified hardness range of Rockwell C 39 to 45 at the surface for sizes up to and including 1/2" and Rockwell C 38 to 45 for sizes over 1/2".

Tensile Strength: { 0 thru 1/2" 180,000 psi min
5/8" and larger 170,000 psi min

(B) Steel, corrosion resistant. Cap screws shall be fabricated from austenitic corrosion resistant steel of types AISI 384, or 18.8.

8. LENGTH TOLERANCES

Nominal Lengths (L)	Nominal Screw Size (Incl.)			
	0 thru 3/8	7/16 thru 3/4	7/8 thru 1-1/2	Over 1-1/2
Up to 1 in., incl.	-0.03	-0.03	-0.05	---
Over 1 in. to 2-1/2, incl.	-0.04	-0.06	-0.10	-0.18
Over 2-1/2 to 6, incl.	-0.06	-0.08	-0.14	-0.20
Over 6	-0.12	-0.12	-0.20	-0.24

9. THREAD LENGTH L_T . The length of thread shall be measured, parallel to the axis of screw, from the extreme point to the last complete (full form) thread. Short length screws that do not have a body will be threaded as follows:

(A) Diameters #0 to 5.8" inclusive shall have a maximum of 2 imperfect threads under the head.

(B) Diameters above 5/8" shall be threaded as close to the head as practicable.

10. GRIP GAGING LENGTH, L_G . The grip gaging length is the distance, measured parallel to the axis of screw, from the bearing surface of the head to the first complete (full form) thread under the head. The L_G value shall be measured from the bearing surface of the head to the face of a GO thread ring gage, having the thread countersink and/or counterbore removed, which has been assembled by hand as far as the thread will permit.

For any screw length, L_G determined by the Formula:
 $L_G = L_{nom} - L_T$ represents the minimum design grip length.

Caution: Information is for general reference only. For more complete specifications consult the current edition of standard ANSI/ASME B18.3, or contact Harcourt Industrial Inc.

HEX SOCKET HEAD CAP SCREWS “1960 SERIES”

INCH SIZES, UNC THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: ALLOY STEEL



Length	#2-56	#3-48	#4-40	#5-40	#6-32	#8-32	#10-24
3/16	SHCS-256-03	SHCS-348-03	-	-	-	-	-
1/4	SHCS-256-04	SHCS-348-04	SHCS-440-04	SHCS-540-04	SHCS-632-04	SHCS-832-04	SHCS-1024-04
3/8	SHCS-256-06	SHCS-348-06	SHCS-440-06	SHCS-540-06	SHCS-632-06	SHCS-832-06	SHCS-1024-06
1/2	SHCS-256-08	SHCS-348-08	SHCS-440-08	SHCS-540-08	SHCS-632-08	SHCS-832-08	SHCS-1024-08
5/8	-	-	SHCS-440-10	SHCS-540-10	SHCS-632-10	SHCS-832-10	SHCS-1024-10
3/4	-	-	SHCS-440-12	SHCS-540-12	SHCS-632-12	SHCS-832-12	SHCS-1024-12
7/8	-	-	-	-	SHCS-632-14	SHCS-832-14	SHCS-1024-14
1	-	-	SHCS-440-16*	SHCS-540-16*	SHCS-632-16	SHCS-832-16	SHCS-1024-16
1-1/4	-	-	SHCS-440-20*	-	SHCS-632-20*	SHCS-832-20	SHCS-1024-20
1-1/2	-	-	-	-	SHCS-632-24*	SHCS-832-24	SHCS-1024-24
1-3/4	-	-	-	-	-	SHCS-832-28*	SHCS-1024-28
2	-	-	-	-	-	SHCS-832-32*	SHCS-1024-32
2-1/4	-	-	-	-	-	-	SHCS-1024-36*
2-1/2	-	-	-	-	-	SHCS-832-40*	SHCS-1024-40*
2-3/4	-	-	-	-	-	-	SHCS-1024-44*
3	-	-	-	-	-	SHCS-832-48*	SHCS-1024-48*
3-1/2	-	-	-	-	-	-	SHCS-1024-56*
4	-	-	-	-	-	-	SHCS-1024-64*

Length	1/4-20	5/16-18	3/8-16	7/16-14	1/2-13	5/8-11	3/4-10	7/8-9	1-8
1/4	SHCS-1420-04	-	-	-	-	-	-	-	-
3/8	SHCS-1420-06	SHCS-51618-06	-	-	-	-	-	-	-
1/2	SHCS-1420-08	SHCS-51618-08	SHCS-3816-08	-	SHCS-1213-08	-	-	-	-
5/8	SHCS-1420-10	SHCS-51618-10	SHCS-3816-10	-	-	-	-	-	-
3/4	SHCS-1420-12	SHCS-51618-12	SHCS-3816-12	SHCS-71614-12	SHCS-1213-12	-	-	-	-
7/8	SHCS-1420-14	SHCS-51618-14	SHCS-3816-14	SHCS-71614-14	SHCS-1213-14	-	-	-	-
1	SHCS-1420-16	SHCS-51618-16	SHCS-3816-16	SHCS-71614-16	SHCS-1213-16	SHCS-5811-16	SHCS-3410-16*	-	-
1-1/8	-	-	SHCS-3816-18	-	-	-	-	-	-
1-1/4	SHCS-1420-20	SHCS-51618-20	SHCS-3816-20	SHCS-71614-20	SHCS-1213-20	SHCS-5811-20	SHCS-3410-20	-	-
1-3/8	-	-	SHCS-3816-22	-	-	-	-	-	-
1-1/2	SHCS-1420-24	SHCS-51618-24	SHCS-3816-24	SHCS-71614-24	SHCS-1213-24	SHCS-5811-24	SHCS-3410-24	SHCS-789-24*	SHCS-18-24*
1-3/4	SHCS-1420-28	SHCS-51618-28	SHCS-3816-28	SHCS-71614-28	SHCS-1213-28	SHCS-5811-28	SHCS-3410-28	SHCS-789-28*	SHCS-18-28*
2	SHCS-1420-32	SHCS-51618-32	SHCS-3816-32	SHCS-71614-32	SHCS-1213-32	SHCS-5811-32	SHCS-3410-32	SHCS-789-32	SHCS-18-32
2-1/4	SHCS-1420-36	SHCS-51618-36	SHCS-3816-36	SHCS-71614-36	SHCS-1213-36	SHCS-5811-36	SHCS-3410-36	SHCS-789-36	SHCS-18-36
2-1/2	SHCS-1420-40	SHCS-51618-40	SHCS-3816-40	SHCS-71614-40	SHCS-1213-40	SHCS-5811-40	SHCS-3410-40	SHCS-789-40	SHCS-18-40
2-3/4	SHCS-1420-44	SHCS-51618-44	SHCS-3816-44	SHCS-71614-44	SHCS-1213-44	SHCS-5811-44	SHCS-3410-44	SHCS-789-44	SHCS-18-44
3	SHCS-1420-48	SHCS-51618-48	SHCS-3816-48	SHCS-71614-48	SHCS-1213-48	SHCS-5811-48	SHCS-3410-48	SHCS-789-48	SHCS-18-48
3-1/4	SHCS-1420-52*	SHCS-51618-52	SHCS-3816-52	-	SHCS-1213-52	SHCS-5811-52	SHCS-3410-52	SHCS-789-52	SHCS-18-52
3-1/2	SHCS-1420-56	SHCS-51618-56	SHCS-3816-56	SHCS-71614-56	SHCS-1213-56	SHCS-5811-56	SHCS-3410-56	SHCS-789-56	SHCS-18-56
3-3/4	SHCS-1420-60*	SHCS-51618-60*	SHCS-3816-60*	-	SHCS-1213-60*	SHCS-5811-60*	SHCS-3410-60*	-	SHCS-18-60*
4	SHCS-1420-64	SHCS-51618-64	SHCS-3816-64	SHCS-71614-64	SHCS-1213-64	SHCS-5811-64	SHCS-3410-64	SHCS-789-64	SHCS-18-64
4-1/4	-	SHCS-51618-68*	SHCS-3816-68*	-	SHCS-1213-68*	SHCS-5811-68*	-	-	-
4-1/2	-	SHCS-51618-72*	SHCS-3816-72	SHCS-71614-72*	SHCS-1213-72	SHCS-5811-72	SHCS-3410-72	SHCS-789-72	SHCS-18-72
4-3/4	-	-	-	-	SHCS-1213-76*	-	-	-	-
5	-	SHCS-51618-80*	SHCS-3816-80	SHCS-71614-80*	SHCS-1213-80	SHCS-5811-80	SHCS-3410-80	SHCS-789-80	SHCS-18-80
5-1/4	-	-	SHCS-3816-84*	-	SHCS-1213-84*	-	-	-	-
5-1/2	-	SHCS-51618-88*	SHCS-3816-88*	-	SHCS-1213-88	SHCS-5811-88	SHCS-3410-88	SHCS-789-88	SHCS-18-88
5-3/4	-	-	SHCS-3816-92*	-	SHCS-1213-92*	-	-	-	-
6	-	SHCS-51618-96*	SHCS-3816-96	-	SHCS-1213-96	SHCS-5811-96	SHCS-3410-96	SHCS-789-96	SHCS-18-96
6-1/4	-	-	-	-	SHCS-1213-100*	-	-	-	-
6-1/2	-	-	SHCS-3816-104*	-	SHCS-1213-104	SHCS-5811-104	SHCS-3410-104	SHCS-789-104	SHCS-18-104
7	-	SHCS-51618-112*	SHCS-3816-112*	-	SHCS-1213-112	SHCS-5811-112	SHCS-3410-112	SHCS-789-112	SHCS-18-112
7-1/2	-	-	-	-	SHCS-1213-120*	SHCS-5811-120*	SHCS-3410-120*	-	-
8	-	-	SHCS-3816-128*	-	SHCS-1213-128	SHCS-5811-128	SHCS-3410-128	SHCS-789-128	SHCS-18-128
8-1/2	-	-	-	-	SHCS-1213-136*	SHCS-5811-136*	SHCS-3410-136*	SHCS-789-136*	SHCS-18-136*
9	-	-	SHCS-3816-144*	-	SHCS-1213-144*	SHCS-5811-144*	SHCS-3410-144*	SHCS-789-144*	SHCS-18-144*
9-1/2	-	-	-	-	SHCS-1213-152*	SHCS-5811-152*	SHCS-3410-152*	-	SHCS-18-152*
10	-	-	-	-	SHCS-1213-160*	SHCS-5811-160*	SHCS-3410-160*	SHCS-789-160*	SHCS-18-160*
10-1/2	-	-	-	-	-	-	SHCS-3410-168*	-	SHCS-18-168*
11	-	-	-	-	SHCS-1213-176*	SHCS-5811-176*	SHCS-3410-176*	SHCS-789-176*	SHCS-18-176*
12	-	-	-	-	SHCS-1213-192*	SHCS-5811-192*	SHCS-3410-192*	SHCS-789-192*	SHCS-18-192*
13	-	-	-	-	-	-	-	-	SHCS-18-208*
14	-	-	-	-	-	-	SHCS-3410-224*	-	SHCS-18-224*
15	-	-	-	-	-	-	-	-	SHCS-18-240*
16	-	-	-	-	-	-	-	-	SHCS-18-256*


*Indicates a semi-standard product, usually in stock

Continued on next page . . .

HEX SOCKET HEAD CAP SCREWS “1960 SERIES”

INCH SIZES, UNC THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: ALLOY STEEL, Continued



Length	1-1/8-7	1-1/4-7	1-3/8-6	1-1/2-6	1-3/4-5	2-4-1/2
2	SHCS-1187-32*	SHCS-1147-32*	-	-	-	-
2-1/2	SHCS-1187-40*	SHCS-1147-40	-	SHCS-1126-40*	-	-
3	SHCS-1187-48*	SHCS-1147-48	SHCS-1386-48*	SHCS-1126-48	-	-
3-1/4	-	SHCS-1147-52*	-	-	-	-
3-1/2	SHCS-1187-56*	SHCS-1147-56	SHCS-1386-56*	SHCS-1126-56	SHCS-1345-56*	-
4	SHCS-1187-64*	SHCS-1147-64	SHCS-1386-64*	SHCS-1126-64	SHCS-1345-64*	SHCS-2412-64*
4-1/2	SHCS-1187-72*	SHCS-1147-72	SHCS-1386-72*	SHCS-1126-72	SHCS-1345-72*	SHCS-2412-72*
5	SHCS-1187-80*	SHCS-1147-80	SHCS-1386-80*	SHCS-1126-80	SHCS-1345-80*	SHCS-2412-80*
5-1/2	SHCS-1187-88*	SHCS-1147-88	-	SHCS-1126-88	SHCS-1345-88*	SHCS-2412-88*
6	SHCS-1187-96*	SHCS-1147-96	-	SHCS-1126-96	SHCS-1345-96*	SHCS-2412-96*
6-1/2	SHCS-1187-104*	SHCS-1147-104	-	SHCS-1126-104	SHCS-1345-104*	SHCS-2412-104*
7	SHCS-1187-112*	SHCS-1147-112	-	SHCS-1126-112	SHCS-1345-112*	SHCS-2412-112*
7-1/2	SHCS-1187-120*	SHCS-1147-120*	-	-	-	-
8	SHCS-1187-128*	SHCS-1147-128	-	SHCS-1126-128	SHCS-1345-128*	SHCS-2412-128*
9	-	SHCS-1147-144	-	SHCS-1126-144	SHCS-1345-144*	SHCS-2412-144*
10	-	SHCS-1147-160	-	SHCS-1126-160	SHCS-1345-160*	SHCS-2412-160*
10-1/2	-	SHCS-1147-168*	-	-	-	-
11	-	SHCS-1147-176*	-	SHCS-1126-176*	-	-
12	-	SHCS-1147-192	-	SHCS-1126-192	SHCS-1345-192*	SHCS-2412-192*
13	-	-	-	-	-	SHCS-2412-208*
14	-	-	-	-	-	SHCS-2412-224*

*Indicates a semi-standard product, usually in stock

HEX SOCKET HEAD CAP SCREWS “1960 SERIES”

INCH SIZES, UNF THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)


MATERIAL: ALLOY STEEL



Length	#0-80	#1-72	#6-40	#8-36	#10-32	1/4-28
1/8	SHCS-080-02	SHCS-172-02	-	-	-	-
1/4	-	-	SHCS-640-04	-	SHCS-1032-04	SHCS-1428-04
3/8	-	-	SHCS-640-06	SHCS-836-06	SHCS-1032-06	SHCS-1428-06
7/16	-	-	-	-	-	SHCS-1428-07*
1/2	-	-	SHCS-640-08	SHCS-836-08	SHCS-1032-08	SHCS-1428-08
5/8	-	-	SHCS-640-10	-	SHCS-1032-10	SHCS-1428-10
3/4	-	-	SHCS-640-12	SHCS-836-12	SHCS-1032-12	SHCS-1428-12
7/8	-	-	-	-	SHCS-1032-14	SHCS-1428-14
1	-	-	-	-	SHCS-1032-16	SHCS-1428-16
1-1/4	-	-	-	-	SHCS-1032-20	SHCS-1428-20
1-3/8	-	-	-	-	-	SHCS-1428-22*
1-1/2	-	-	-	-	SHCS-1032-24	SHCS-1428-24
1-3/4	-	-	-	-	SHCS-1032-28	SHCS-1428-28
2	-	-	-	-	SHCS-1032-32	SHCS-1428-32
2-1/4	-	-	-	-	SHCS-1032-36*	SHCS-1428-36
2-1/2	-	-	-	-	SHCS-1032-40*	SHCS-1428-40*
2-3/4	-	-	-	-	SHCS-1032-44*	-
3	-	-	-	-	SHCS-1032-48*	SHCS-1428-48*
3-1/4	-	-	-	-	-	-
3-1/2	-	-	-	-	SHCS-1032-56*	-
3-3/4	-	-	-	-	-	-
4	-	-	-	-	SHCS-1032-64*	SHCS-1428-64*

Length	5/16-24	3/8-24	7/16-20	1/2-20	5/8-18
1/2	SHCS-51624-08	SHCS-3824-08	-	SHCS-1220-08*	-
5/8	SHCS-51624-10	SHCS-3824-10	-	-	-
3/4	SHCS-51624-12	SHCS-3824-12	-	SHCS-1220-12*	-
7/8	SHCS-51624-14	-	-	-	-
1	SHCS-51624-16	SHCS-3824-16	SHCS-71620-16	SHCS-1220-16	SHCS-5818-16
1-1/4	SHCS-51624-20	SHCS-3824-20	SHCS-71620-20	SHCS-1220-18	SHCS-5818-18
1-3/8	-	-	-	-	-
1-1/2	SHCS-51624-24	SHCS-3824-24	SHCS-71620-24	SHCS-1220-24	SHCS-5818-24
1-3/4	SHCS-51624-28	SHCS-3824-28	SHCS-71620-28*	SHCS-1220-28	SHCS-5818-28
2	SHCS-51624-32	SHCS-3824-32	SHCS-71620-32	SHCS-1220-32	SHCS-5818-32
2-1/4	SHCS-51624-36	SHCS-3824-36	SHCS-71620-36*	SHCS-1220-36	SHCS-5818-36*
2-1/2	SHCS-51624-40	SHCS-3824-40	SHCS-71620-40*	SHCS-1220-40	SHCS-5818-40
2-3/4	-	SHCS-3824-44*	SHCS-71620-44*	SHCS-1220-44*	SHCS-5818-44*
3	SHCS-51624-48*	SHCS-3824-48	SHCS-71620-48*	SHCS-1220-48	SHCS-5818-48*
3-1/4	-	-	-	-	SHCS-5818-52*
3-1/2	SHCS-51624-56*	SHCS-3824-56*	SHCS-71620-56*	SHCS-1220-56*	SHCS-5818-56*
3-3/4	-	-	-	SHCS-1220-60*	-
4	SHCS-51624-64*	SHCS-3824-64*	-	SHCS-1220-64*	SHCS-5818-64*
4-1/2	-	SHCS-3824-72*	-	SHCS-1220-72*	SHCS-5818-72*
5	-	SHCS-3824-80*	-	SHCS-1220-80*	SHCS-5818-80*
5-1/2	-	SHCS-3824-88*	-	SHCS-1220-88*	-
5-3/4	-	SHCS-3824-92*	-	-	-
6	-	SHCS-3824-96*	-	SHCS-1220-96*	SHCS-5818-96*
6-1/2	-	-	-	-	-
7	-	-	-	SHCS-1220-112*	-
8	-	-	-	SHCS-1220-128*	-

Length	3/4-16	7/8-14	1-14	1 1/4-12	1 1/2-12
1-1/4	SHCS-3416-20*	-	-	-	-
1-1/2	SHCS-3416-24*	-	-	-	-
1-3/4	SHCS-3416-28*	-	-	-	-
2	SHCS-3416-32*	SHCS-7814-32*	SHCS-114-32*	SHCS-11412-32*	-
2-1/4	SHCS-3416-36*	SHCS-7814-36*	SHCS-114-36*	-	-
2-1/2	SHCS-3416-40*	SHCS-7814-40*	SHCS-114-40*	SHCS-11412-40*	-
2-3/4	SHCS-3416-44*	SHCS-7814-44*	SHCS-114-44*	-	-
3	SHCS-3416-48*	SHCS-7814-48*	SHCS-114-48*	SHCS-11412-48*	SHCS-11212-48*
3-1/4	SHCS-3416-52*	-	SHCS-114-52*	-	-
3-1/2	SHCS-3416-56*	SHCS-7814-56*	SHCS-114-56*	SHCS-11412-56*	SHCS-11212-56*
3-3/4	SHCS-3416-60*	-	-	-	-
4	SHCS-3416-64*	SHCS-7814-64*	SHCS-114-64*	SHCS-11412-64*	SHCS-11212-64*
4-1/2	SHCS-3416-72*	SHCS-7814-72*	SHCS-114-72*	SHCS-11412-72*	SHCS-11212-72*
5	SHCS-3416-80*	SHCS-7814-80*	SHCS-114-80*	SHCS-11412-80*	SHCS-11212-80*
5-1/2	SHCS-3416-88*	-	SHCS-114-88*	SHCS-11412-88*	SHCS-11212-88*
6	SHCS-3416-96*	SHCS-7814-96*	SHCS-114-96*	SHCS-11412-96*	SHCS-11212-96*
6-1/2	-	-	-	SHCS-11412-104*	SHCS-11212-104*
7	SHCS-3416-112*	SHCS-7814-112*	SHCS-114-112*	SHCS-11412-112*	SHCS-11212-112*
7-1/2	-	-	-	SHCS-11412-120*	-
8	SHCS-3416-128*	SHCS-7814-128*	SHCS-114-128*	SHCS-11412-128*	SHCS-11212-128*
9	-	-	-	SHCS-11412-144*	SHCS-11212-144*
10	-	-	-	SHCS-11412-160*	SHCS-11212-160*

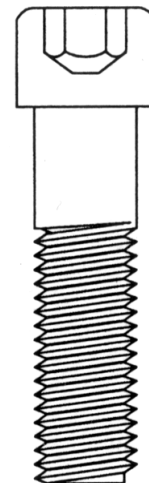


*Indicates a semi-standard product, usually in stock

HEX SOCKET HEAD CAP SCREWS “1960 SERIES”

INCH SIZES, UNC & UNF THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: 18-8 STAINLESS STEEL



Length	#1-72	#4-40	#6-32	#8-32	#10-24	#10-32
1/4	SHCSS-172-04	SHCSS-440-04	SHCSS-632-04	-	-	-
3/8	SHCSS-172-06	SHCSS-440-06	SHCSS-632-06	SHCSS-832-06	SHCSS-1024-06	SHCSS-1032-06
1/2	-	SHCSS-440-08	SHCSS-632-08	SHCSS-832-08	SHCSS-1024-08	SHCSS-1032-08
5/8	-	-	SHCSS-632-10	SHCSS-832-10	SHCSS-1024-10	SHCSS-1032-10
3/4	-	-	SHCSS-632-12	SHCSS-832-12	SHCSS-1024-12	SHCSS-1032-12
7/8	-	-	-	-	-	-
1	-	-	-	SHCSS-832-16	SHCSS-1024-16	SHCSS-1032-16
1-1/4	-	-	-	-	SHCSS-1024-20	SHCSS-1032-20
1-1/2	-	-	-	-	SHCSS-1024-24	SHCSS-1032-24

Length	1/4-20	1/4-28	5/16-18	3/8-16	1/2-13
3/8	SHCSS-1420-06	-	-	-	-
1/2	SHCSS-1420-08	SHCSS-1428-08	SHCSS-51618-08	SHCSS-3816-08	-
5/8	SHCSS-1420-10	SHCSS-1428-10	SHCSS-51618-10	SHCSS-3816-10	-
3/4	SHCSS-1420-12	SHCSS-1428-12	SHCSS-51618-12	SHCSS-3816-12	-
7/8	SHCSS-1420-14	-	-	-	-
1	SHCSS-1420-16	SHCSS-1428-16	SHCSS-51618-16	SHCSS-3816-16	SHCSS-1213-16
1-1/4	SHCSS-1420-20	-	SHCSS-51618-20	SHCSS-3816-20	SHCSS-1213-20
1-1/2	SHCSS-1420-24	-	SHCSS-51618-24	SHCSS-3816-24	SHCSS-1213-24
1-3/4	SHCSS-1420-28	-	SHCSS-51618-28	SHCSS-3816-28	SHCSS-1213-28
2	SHCSS-1420-32	-	SHCSS-51618-32	SHCSS-3816-32	SHCSS-1213-32

PACKAGE QUANTITIES:

Through 3/8 x 1-1/2	100
3/8 x 1-3/4 through 1/2 x 2	50
1/2 x 2-1/2	25

HEX SOCKET HEAD CAP SCREWS


METRIC THREAD, GRADE ISO 12.9 (174,000 psi minimum)



Diam. MM	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24
Thread P MM	.5	.7	.8	1	1.25	1.5	1.75	2	2.5	3
Length MM										
6	SHCSM-03-06	SHCSM-04-06	-	-	-	-	-	-	-	-
8	SHCSM-03-08	SHCSM-04-08	SHCSM-05-08	SHCSM-06-08	-	-	-	-	-	-
10	SHCSM-03-10	SHCSM-04-10	SHCSM-05-10	SHCSM-06-10	SHCSM-08-10	-	-	-	-	-
12	SHCSM-03-12	SHCSM-04-12	SHCSM-05-12	SHCSM-06-12	SHCSM-08-12	-	-	-	-	-
16	SHCSM-03-16	SHCSM-04-16	SHCSM-05-16	SHCSM-06-16	SHCSM-08-16	SHCSM-10-16	-	-	-	-
20	SHCSM-03-20	SHCSM-04-20	SHCSM-05-20	SHCSM-06-20	SHCSM-08-20	SHCSM-10-20	SHCSM-12-20	-	-	-
25	SHCSM-03-25	SHCSM-04-25	SHCSM-05-25	SHCSM-06-25	SHCSM-08-25	SHCSM-10-25	SHCSM-12-25	-	-	-
30	SHCSM-03-30	SHCSM-04-30	SHCSM-05-30	SHCSM-06-30	SHCSM-08-30	SHCSM-10-30	SHCSM-12-30	SHCSM-16-30	-	-
35	SHCSM-03-35	SHCSM-04-35	SHCSM-05-35	SHCSM-06-35	SHCSM-08-35	SHCSM-10-35	SHCSM-12-35	SHCSM-16-35	-	-
40	-	SHCSM-04-40	SHCSM-05-40	SHCSM-06-40	SHCSM-08-40	SHCSM-10-40	SHCSM-12-40	SHCSM-16-40	SHCSM-20-40	-
45	-	SHCSM-04-45	SHCSM-05-45	SHCSM-06-45	SHCSM-08-45	SHCSM-10-45	SHCSM-12-45	SHCSM-16-45	SHCSM-20-45	-
50	-	SHCSM-04-50	SHCSM-05-50	SHCSM-06-50	SHCSM-08-50	SHCSM-10-50	SHCSM-12-50	SHCSM-16-50	SHCSM-20-50	SHCSM-24-50
55	-	-	-	SHCSM-06-55	SHCSM-08-55	SHCSM-10-55	SHCSM-12-55	SHCSM-16-55	SHCSM-20-55	-
60	-	-	-	SHCSM-06-60	SHCSM-08-60	SHCSM-10-60	SHCSM-12-60	SHCSM-16-60	SHCSM-20-60	SHCSM-24-60
65	-	-	-	SHCSM-06-65	SHCSM-08-65	SHCSM-10-65	SHCSM-12-65	SHCSM-16-65	SHCSM-20-65	-
70	-	-	-	SHCSM-06-70	SHCSM-08-70	SHCSM-10-70	SHCSM-12-70	SHCSM-16-70	SHCSM-20-70	SHCSM-20-70
75	-	-	-	SHCSM-06-75	-	SHCSM-10-75	SHCSM-12-75	SHCSM-16-75	SHCSM-20-75	-
80	-	-	-	-	SHCSM-08-80	SHCSM-10-80	SHCSM-12-80	SHCSM-16-80	SHCSM-20-80	-
90	-	-	-	-	-	SHCSM-10-90	SHCSM-12-90	SHCSM-16-90	SHCSM-20-90	SHCSM-20-90
100	-	-	-	-	SHCSM-08-100	SHCSM-10-100	SHCSM-12-100	SHCSM-16-100	SHCSM-20-100	SHCSM-20-100
110	-	-	-	-	-	-	SHCSM-12-110	SHCSM-16-110	SHCSM-20-110	SHCSM-20-110
120	-	-	-	-	-	SHCSM-10-120	SHCSM-12-120	SHCSM-16-120	SHCSM-20-120	SHCSM-20-120
130	-	-	-	-	-	SHCSM-10-130	-	-	SHCSM-20-130	-
140	-	-	-	-	-	-	-	-	SHCSM-20-140	-
150	-	-	-	-	-	-	-	-	SHCSM-20-150	-

PACKAGE QUANTITIES

Diameter	100	50	25	10
M3-M8	All	-	-	-
M10	Thru 40mm	45mm & up	-	-
M12	-	All	-	-
M16	-	-	All	-
M20	-	-	Thru 110mm	120mm & up
M24	-	-	-	All

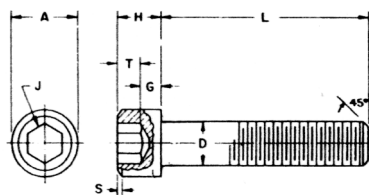


A WARNING ABOUT SOCKET CAP SCREW STRENGTH LEVELS

New users of metric fasteners should realize that metric socket cap screws are NOT sold in a single strength level like U.S. socket screws. Under the ISO specifications 4 different levels are made – from 6.8 (87000 psi min.) to 12.9 (174000 psi min.), a difference of 100% in strength. Only the top grade (12.9) is comparable to standard U.S. socket head cap screws. With Harcourt metric socket cap screws you take no chances. They are made in one strength level only, 12.9 (174000 psi min.).

DIMENSIONS OF METRIC SOCKET HEAD CAP SCREWS (IN MILLIMETERS)

Nominal Size	D		A		H		S	J	T	G	K
	Body Diameter		Head Diameter		Head Height		Chamfer or Radius	Hexagon Socket Size	Key Engagement	Wall Thickness	Chamfer or Radius
	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Nom.	Min.	Min.	Max.
3	3.00	2.86	5.50	5.32	3.00	2.89	.30	2.5	1.50	1.02	0.13
4	4.00	3.82	7.00	6.80	4.00	3.88	.40	3.0	2.00	1.52	0.13
5	5.00	4.82	8.50	8.27	5.00	4.86	.50	4.0	2.50	1.90	0.13
6	6.00	5.82	10.00	9.74	6.00	5.85	.60	5.0	3.00	2.28	0.20
8	8.00	7.78	13.00	12.70	8.00	7.83	.80	6.0	4.00	3.20	0.20
10	10.00	9.78	16.00	15.67	10.00	9.81	1.00	8.0	5.00	4.00	0.20
12	12.00	11.73	18.00	17.63	12.00	11.79	1.20	10.0	6.00	4.80	0.25
16	16.00	15.73	24.00	23.58	16.00	15.76	1.60	14.0	8.00	6.40	0.25
20	20.00	19.67	30.00	29.53	20.00	19.73	2.00	17.0	10.00	8.00	0.40
24	24.00	23.67	36.00	35.48	24.00	23.70	2.40	19.0	12.00	9.60	0.40

HEX SOCKET HEAD CAP SCREWS
METRIC THREAD
MATERIAL: STAINLESS STEEL A-2




Dia. Len.	M1.6 x 0.35	M2 x 0.4	M2.5 x 0.45	M3 x 0.5	M4 x 0.7	M5 x 0.8
3	SHCSSM-016-03	SHCSSM-02-03	-	-	-	-
4	SHCSSM-016-04	SHCSSM-02-04	SHCSSM-025-04	-	-	-
5	SHCSSM-016-05	SHCSSM-02-05	SHCSSM-025-05	-	-	-
6	SHCSSM-016-06	SHCSSM-02-06	SHCSSM-025-06	SHCSSM-03-06	SHCSSM-04-06	-
8	-	SHCSSM-02-08	SHCSSM-025-08	SHCSSM-03-08	SHCSSM-04-08	SHCSSM-05-08
10	-	SHCSSM-02-10	SHCSSM-025-10	SHCSSM-03-10	SHCSSM-04-10	SHCSSM-05-10
12	-	SHCSSM-02-12	SHCSSM-025-12	SHCSSM-03-12	SHCSSM-04-12	SHCSSM-05-12
16	-	-	SHCSSM-025-16	SHCSSM-03-16	SHCSSM-04-16	SHCSSM-05-16
20	-	-	-	-	SHCSSM-04-20	SHCSSM-05-20
25	-	-	-	-	SHCSSM-04-25	SHCSSM-05-25
30	-	-	-	-	SHCSSM-04-30	SHCSSM-05-30
35	-	-	-	-	-	SHCSSM-05-35
40	-	-	-	-	-	SHCSSM-05-40

Dia. Len.	M6 x 1	M8 x 1.25	M10 x 1.5	M12 x 1.75	M16 x 2	M20 x 2.5
10	SHCSSM-06-10	-	-	-	-	-
12	SHCSSM-06-12	-	-	-	-	-
16	SHCSSM-06-16	SHCSSM-08-16	-	-	-	-
20	SHCSSM-06-20	SHCSSM-08-20	SHCSSM-10-20	SHCSSM-12-20	-	-
25	SHCSSM-06-25	SHCSSM-08-25	SHCSSM-10-25	SHCSSM-12-25	-	-
30	SHCSSM-06-30	SHCSSM-18-30	SHCSSM-10-30	SHCSSM-12-30	SHCSSM-16-30	-
35	SHCSSM-06-35	SHCSSM-18-35	SHCSSM-10-35	SHCSSM-12-35	SHCSSM-16-35	-
40	SHCSSM-06-40	SHCSSM-18-40	SHCSSM-10-40	SHCSSM-12-40	SHCSSM-16-40	-
45	SHCSSM-06-45	SHCSSM-18-45	SHCSSM-10-45	SHCSSM-12-45	SHCSSM-16-45	SHCSSM-20-45
50	SHCSSM-06-50	SHCSSM-18-50	SHCSSM-10-50	SHCSSM-12-50	SHCSSM-16-50	SHCSSM-20-50
55	-	SHCSSM-18-55	SHCSSM-10-55	SHCSSM-12-55	SHCSSM-16-55	SHCSSM-20-55
60	-	SHCSSM-18-60	SHCSSM-10-60	SHCSSM-12-60	SHCSSM-16-60	SHCSSM-20-60
70	-	-	SHCSSM-10-70	SHCSSM-12-70	SHCSSM-16-70	SHCSSM-20-70
80	-	-	SHCSSM-10-80	SHCSSM-12-80	SHCSSM-16-80	SHCSSM-20-80
90	-	-	-	SHCSSM-12-90	SHCSSM-16-90	SHCSSM-20-90
100	-	-	-	SHCSSM-12-100	SHCSSM-16-100	SHCSSM-20-100

FLAT HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC THREADS

DIMENSIONS & SPECIFICATIONS

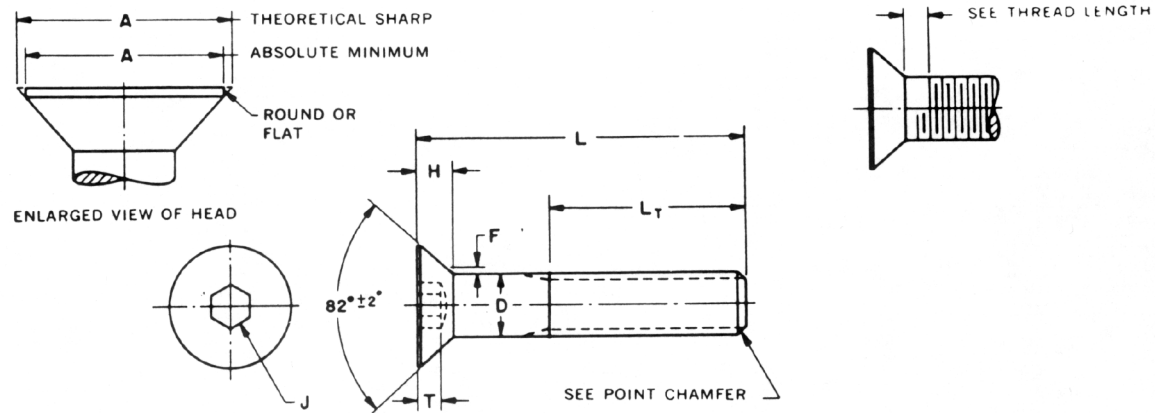

Nominal Size or Basic Screw Diameter		D		A		H		J		T	F	L _T
		Body Diameter		Head Diameter		Head Height		Hexagon Socket Size		Key En- gagement	Fillet Exten. Above D	Basic Thread Length
		Max.	Min.	Theoretical Sharp Max.	Abs. Min.	Reference	Flushness Tolerance	Nom.		Min.	Max.	Min.
4	0.1120	0.1120	0.1075	0.255	0.218	0.083	0.011	1/16	0.062	0.055	0.012	0.750
5	0.1250	0.1250	0.1202	0.281	0.240	0.090	0.012	5/64	0.078	0.061	0.014	0.750
6	0.1380	0.1380	0.1329	0.307	0.263	0.097	0.013	5/64	0.078	0.066	0.015	0.750
8	0.1640	0.1640	0.1585	0.359	0.311	0.112	0.014	3/32	0.094	0.076	0.015	0.875
10	0.1900	0.1900	0.1840	0.411	0.359	0.127	0.015	1/8	0.125	0.087	0.015	0.875
1/4	0.2500	0.2500	0.2435	0.531	0.480	0.161	0.016	5/32	0.156	0.111	0.015	1.000
5/16	0.3125	0.3125	0.3053	0.656	0.600	0.198	0.017	3/16	0.188	0.135	0.015	1.125
3/8	0.3750	0.3750	0.3678	0.781	0.720	0.234	0.018	7/32	0.219	0.159	0.015	1.250
7/16	0.4375	0.4375	0.4294	0.844	0.781	0.234	0.018	1/4	0.250	0.159	0.015	1.375
1/2	0.5000	0.5000	0.4919	0.938	0.872	0.251	0.018	5/16	0.312	0.172	0.015	1.500
5/8	0.6250	0.6250	0.6163	1.188	1.112	0.324	0.022	3/8	0.375	0.220	0.015	1.750
3/4	0.7500	0.7500	0.7406	1.438	1.355	0.396	0.024	1/2	0.500	0.220	0.015	2.000
7/8	0.8750	0.8750	0.8647	1.688	1.604	0.468	0.025	9/16	0.562	0.248	0.015	2.250
1	1.0000	1.0000	0.9886	1.938	1.841	0.540	0.028	5/8	0.625	0.297	0.015	2.500

1. HEAD DIAMETER. The maximum sharp values under Column A are theoretical values only as it is not practical to make the edge of the head sharp. The maximum sharp value represents the exact diameter of a hole countersunk to exactly 82° in which a screw having maximum head size will just fit flush.

2. HEAD HEIGHT. The value for head height is a reference value only.

3. FLUSHNESS TOLERANCE. The flushness tolerance is the distance the top surface of a screw having the minimum head size will be below the flush condition in a hole countersunk exactly 82° to the maximum sharp dimension listed in Column A.

4. LENGTH OF SCREW. The length (L) of the screw shall be measured on a line parallel to the axis from the plane of the top of the head to the plane of the flat of the point.

5. STANDARD LENGTHS. See Flat Head Catalog Table

Nominal Lengths (L)	Nominal Screw Size (Incl.)		
	0 thru 3/8	7/16 thru 3/4	7/8 thru 1
Up to 1 in., incl.	-0.03	-0.03	-0.05
Over 1 in. to 2-1/2, incl.	-0.04	-0.06	-0.10
Over 2-1/2 to 6, incl.	-0.06	-0.08	-0.14
Over 6	-0.12	-0.12	-0.20

7. THREAD LENGTH. The thread length L_T shall be measured from the extreme point to the last useable thread. The thread length tolerance shall be equal to the nominal diameter of the screw. Screws too short for application of the formula are to be threaded as close to the head as practicable.

8. SCREW POINT CHAMFER. The points of sizes #10 and larger shall be chamfered. Chamfering of screw sizes up to and including #8 shall be optional.

9. FILLET (F). A fillet between the conical bearing surface of the head and the shank (body) of the screw is allowable above the maximum tabulated value for D.

10. CONCENTRICITY. Concentricity of the thread with the body shall be within .005 inch per inch of body length (unthreaded portion) total indicator reading, taken directly under the head when the screw is held by the full threads closest to the head of the screw, and shall not exceed a maximum of .025.

11. THREADS. Threads shall be Unified threads with radius root; Class 3A UNRC and UNRF Series.


12. MATERIAL. Steel, high grade alloy, hardened by quenching in oil from the hardening temperature and tempered to a Rockwell "C" hardness of "38-44" at the surface.

Caution: Information is for general reference only. For more complete specifications consult the current edition of standard ANSI/ASME B18.3, or contact Harcourt Industrial Inc.

FLAT HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: ALLOY STEEL

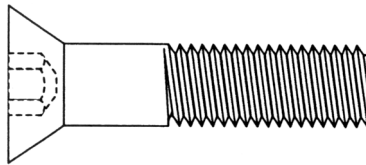

Length	#4-40	#5-40	#6-32	#8-32	#10-24
1/4	SHFS-440-04	SHFS-540-04	SHFS-632-04	SHFS-832-04*	-
3/8	SHFS-440-06	SHFS-540-06	SHFS-632-06	SHFS-832-06	SHFS-1024-06
7/16	-	-	SHFS-632-07*	-	-
1/2	SHFS-440-08	SHFS-540-08	SHFS-632-08	SHFS-832-08	SHFS-1024-08
5/8	SHFS-440-10	SHFS-540-10	SHFS-632-10	SHFS-832-10	SHFS-1024-10
3/4	SHFS-440-12	SHFS-540-12	SHFS-632-12	SHFS-832-12	SHFS-1024-12
7/8	-	-	-	-	-
1	-	-	SHFS-632-16*	SHFS-832-16	SHFS-1024-16
1-1/4	-	-	-	SHFS-832-20*	SHFS-1024-20
1-3/8	-	-	-	-	-
1-1/2	-	-	-	-	SHFS-1024-24

Length	#10-32	1/4-20	1/4-28	5/16-18	5/16-24
3/8	SHFS-1032-06	SHFS-1420-06	SHFS-1428-06	-	SHFS-51624-06*
7/16	-	-	SHFS-1428-07*	-	-
1/2	SHFS-1032-08	SHFS-1420-08	SHFS-1428-08	SHFS-51618-08	SHFS-51624-08
5/8	SHFS-1032-10	SHFS-1420-10	SHFS-1428-10	SHFS-51618-10	SHFS-51624-10
3/4	SHFS-1032-12	SHFS-1420-12	SHFS-1428-12	SHFS-51618-12	SHFS-51624-12
7/8	-	SHFS-1420-14*	SHFS-1428-14*	SHFS-51618-14*	-
1	SHFS-1032-16	SHFS-1420-16	SHFS-1428-16	SHFS-51618-16	SHFS-51624-16
1-1/4	SHFS-1032-20	SHFS-1420-20	SHFS-1428-20	SHFS-51618-20	SHFS-51624-20
1-3/8	-	-	-	SHFS-51618-22*	-
1-1/2	SHFS-1032-24	SHFS-1420-24	SHFS-1428-24	SHFS-51618-24	SHFS-51624-24
1-3/4	-	SHFS-1420-28	-	SHFS-51618-28	-
2	-	SHFS-1420-32	SHFS-1428-32*	SHFS-51618-32	SHFS-51624-32*
2-1/4	-	SHFS-1420-36*	SHFS-1428-36*	SHFS-51618-36	-
2-1/2	-	SHFS-1420-40*	SHFS-1428-40*	SHFS-51618-40	SHFS-51624-40*
2-3/4	-	-	-	-	SHFS-51624-44*
3	-	SHFS-1420-48*	SHFS-1428-48*	SHFS-51618-48*	-
3-1/2	-	SHFS-1420-56*	-	-	-

NOTE: Length Code is Length in 1/16"

Length	3/8-16	3/8-24	7/16-14	1/2-13	1/2-20	5/8-11
1/2	SHFS-3816-08	-	-	-	-	-
5/8	SHFS-3816-10	SHFS-3824-10	-	-	-	-
3/4	SHFS-3816-12	SHFS-3824-12	SHFS-71614-12	SHFS-1213-12	SHFS-1220-12	-
7/8	SHFS-3816-14*	-	-	-	-	-
1	SHFS-3816-16	SHFS-3824-16	SHFS-71614-16	SHFS-1213-16	SHFS-1220-16	SHFS-5811-16*
1 1/4	SHFS-3816-20	SHFS-3824-20	SHFS-71614-20	SHFS-1213-20	SHFS-1220-20	SHFS-5811-20
1 3/8	SHFS-3816-22*	-	-	SHFS-1213-22*	-	-
1 1/2	SHFS-3816-24	SHFS-3824-24	SHFS-71614-24	SHFS-1213-24	SHFS-1220-24	SHFS-5811-24
1 3/4	SHFS-3816-28	-	-	SHFS-1213-28	SHFS-1220-28	SHFS-5811-28
2	SHFS-3816-32	SHFS-3824-32*	-	SHFS-1213-32	SHFS-1220-32	SHFS-5811-32
2 1/4	SHFS-3816-36	-	-	SHFS-1213-36	SHFS-1220-36*	SHFS-5811-36
2 1/2	SHFS-3816-40	-	-	SHFS-1213-40	SHFS-1220-40*	SHFS-5811-40
2 3/4	-	-	-	-	-	SHFS-5811-44*
3	SHFS-3816-48	-	-	SHFS-1213-48	SHFS-1220-48*	SHFS-5811-48
3 1/4	SHFS-3816-52*	-	-	SHFS-1213-52*	-	-
3 1/2	SHFS-3816-56*	-	-	SHFS-1213-56*	-	SHFS-5811-56*
3 3/4	-	-	-	-	-	SHFS-5811-60*
4	SHFS-3816-64*	-	-	SHFS-1213-64*	SHFS-1220-64*	SHFS-5811-64*
4 1/2	-	-	-	SHFS-1213-72*	-	SHFS-5811-72*
5	-	-	-	SHFS-1213-80*	-	SHFS-5811-80*
5 1/2	-	-	-	SHFS-1213-88*	-	SHFS-5811-88*
6	-	-	-	SHFS-1213-96*	-	SHFS-5811-96*

NOTE: Length Code is Length in 1/16"


*Indicates a semi-standard product, usually in stock

Continued on next page . . .

FLAT HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: ALLOY STEEL, Continued

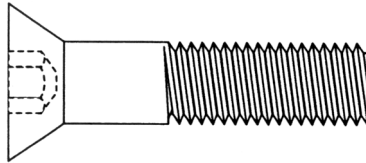

Length	5/8-18	3/4-10	3/4-16	7/8-9	1-8
1	-	SHFS-3410-16*	-	-	-
1-1/4	-	SHFS-3410-20	-	-	-
1-3/8	-	-	-	-	-
1-1/2	-	SHFS-3410-24	-	-	-
1-3/4	-	SHFS-3410-28	-	-	-
2	-	SHFS-3410-32	SHFS-3416-32*	SHFS-789-32*	SHFS-18-32*
2-1/4	-	SHFS-3410-36	-	-	-
2-1/2	-	SHFS-3410-40	-	SHFS-789-40*	SHFS-18-40*
2-3/4	-	SHFS-3410-44*	-	-	-
3	SHFS-5818-48*	SHFS-3410-48	SHFS-3416-48*	SHFS-789-48*	SHFS-18-48*
3-1/4	-	SHFS-3410-52*	-	-	-
3-1/2	-	SHFS-3410-56*	-	SHFS-789-56*	SHFS-18-56*
3-3/4	-	SHFS-3410-60*	-	-	-
4	-	SHFS-3410-64*	-	SHFS-789-64*	SHFS-18-64*
4-1/2	-	SHFS-3410-72*	-	SHFS-789-72*	SHFS-18-72*
5	-	SHFS-3410-80*	-	SHFS-789-80*	SHFS-18-80*
5-1/2	-	SHFS-3410-88*	-	SHFS-789-88*	SHFS-18-88*
6	-	SHFS-3410-96*	-	SHFS-789-96*	SHFS-18-96*
7	-	-	-	SHFS-789-112*	SHFS-18-112*
8	-	-	-	SHFS-789-128*	SHFS-18-128*

NOTE: Length Code is Length in 1/16"

*Indicates a semi-standard product, usually in stock

PACKAGE QUANTITIES


Diameter	100	50	25
Through 5/16	All	-	-
3/8	Thru 1-1/2	1-3/4-3	-
7/16	Thru 1	1-1/4-1-1/2	-
1/2	-	Thru 2	2-1/4-3
5/8 & 3/4	-	-	All

FLAT HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC THREAD (SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)

MATERIAL: STAINLESS STEEL 18.8 (A2)

CLASS FIT 3A

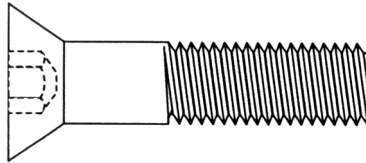


Length	#4-40	#6-32	#8-32	#10-24	#10-32
1/4	SHFSS-440-04	SHFSS-632-04	-	-	-
3/8	SHFSS-440-06	SHFSS-632-06	SHFSS-832-06	SHFSS-1024-06	SHFSS-1032-06
1/2	SHFSS-440-08	SHFSS-632-08	SHFSS-832-08	SHFSS-1024-08	SHFSS-1032-08
5/8	-	SHFSS-632-10	SHFSS-832-10	SHFSS-1024-10	SHFSS-1032-10
3/4	-	SHFSS-632-12	SHFSS-832-12	SHFSS-1024-12	SHFSS-1032-12
7/8	-	-	SHFSS-832-14	SHFSS-1024-14	-
1	-	-	SHFSS-832-16	SHFSS-1024-16	SHFSS-1032-16
1-1/4	-	-	-	SHFSS-1024-20	SHFSS-1032-20
1-1/2	-	-	-	SHFSS-1024-24	SHFSS-1032-24

Length	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
3/8	SHFSS-1420-06	-	-	-	-
1/2	SHFSS-1420-08	SHFSS-51618-08	SHFSS-3816-08	-	-
5/8	SHFSS-1420-10	SHFSS-51618-10	-	-	-
3/4	SHFSS-1420-12	SHFSS-51618-12	SHFSS-3816-12	SHFSS-1213-12	-
1	SHFSS-1420-16	SHFSS-51618-16	SHFSS-3816-16	SHFSS-1213-16	SHFSS-5811-16
1-1/4	SHFSS-1420-20	SHFSS-51618-20	SHFSS-3816-20	SHFSS-1213-20	SHFSS-5811-20
1-1/2	SHFSS-1420-24	SHFSS-51618-24	SHFSS-3816-24	SHFSS-1213-24	SHFSS-5811-24
1-3/4	-	SHFSS-51618-28	SHFSS-3816-28	SHFSS-1213-28	SHFSS-5811-28
2	-	SHFSS-51618-32	SHFSS-3816-32	SHFSS-1213-32	SHFSS-5811-32
2-1/2	-	-	-	-	SHFSS-5811-40
3	-	-	-	-	SHFSS-5811-48

NOTE: Length Code is Length in 1/16"

FLAT HEAD HEX SOCKET CAP SCREWS **METRIC SIZES, 90° INCLUDED HEAD ANGLE**

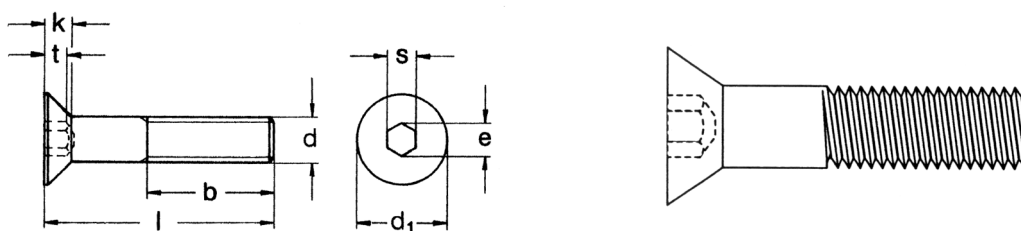

d Nominal Size	b Thread Length		d ₁		k	e	s	t
	1<125	1>125	Head Diameter		Head Height Max.	Diag. of Hex Socket	Hexagon Socket Size Nom.	Key En- gagement Min.
			Typical	Theor. Sharp				
3	12	-	6	6.72	1.7	2.30	2.0	1.2
4	14	-	8	8.96	2.3	2.87	2.5	1.8
5	16	-	10	11.20	2.8	3.44	3.0	2.3
6	18	-	12	13.44	3.3	4.58	4.0	2.5
8	22	-	16	17.92	4.4	5.72	5.0	3.5
10	26	-	20	22.40	5.5	6.86	6.0	4.4
12	30	-	24	26.88	6.5	9.15	8.0	4.6
16	38	44	30	33.60	7.5	11.43	10.0	5.3
20	46	52	36	40.32	8.5	13.72	12.0	5.9
24	54	60	39	43.68	14	16.00	14.0	10.3

MATERIAL: ALLOY STEEL


Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1	M8 x 1.25	M10 x 1.5	M12 x 1.75
Length MM							
8	SHFSM-03-08	SHFSM-04-08	SHFSM-05-08	SHFSM-06-08	-	-	-
10	SHFSM-03-10	-	SHFSM-05-10	SHFSM-06-10	SHFSM-08-10	-	-
12	SHFSM-03-12	SHFSM-04-12	SHFSM-05-12	SHFSM-06-12	SHFSM-08-12	-	-
16	SHFSM-03-16	SHFSM-04-16	SHFSM-05-16	SHFSM-06-16	SHFSM-08-16	SHFSM-10-16	-
20	SHFSM-03-20	SHFSM-04-20	SHFSM-05-20	SHFSM-06-20	SHFSM-08-20	SHFSM-10-20	SHFSM-12-20
25	-	SHFSM-04-25	SHFSM-05-25	SHFSM-06-25	SHFSM-08-25	SHFSM-10-25	SHFSM-12-25
30	-	SHFSM-04-30	SHFSM-05-30	SHFSM-06-30	SHFSM-08-30	SHFSM-10-30	SHFSM-12-30
40	-	-	-	SHFSM-06-40	SHFSM-08-40	SHFSM-10-40	SHFSM-12-40
45	-	-	-	-	-	-	-
50	-	-	-	-	-	SHFSM-10-50	-

PACKAGE QUANTITIES

Diameter	100	50	25	10
M3-M8	All	-	-	-
M10	Thru 30mm	35mm & up	-	-
M12	-	All	-	-
M16	-	Thru 70mm	Over 70mm	-
M20	-	-	Thru 150mm	Over 150mm
M24	-	-	Thru 100mm	Over 100mm

Continued on next page . . .

FLAT HEAD HEX SOCKET CAP SCREWS **METRIC SIZES, 90° INCLUDED HEAD ANGLE, Continued**

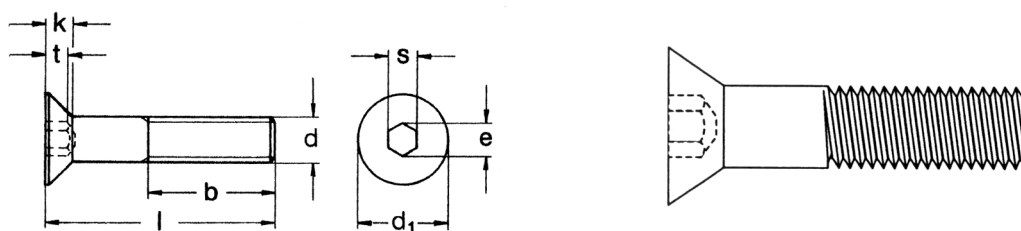

d Nominal Size	b Thread Length		d ₁		k	e	s	t
			Head Diameter		Head Height	Diag. of Hex Socket	Hexagon Socket Size	Key En- gagement
	1<125	1>125	Typical	Theor. Sharp	Max.		Nom.	Min.
3	12	-	6	6.72	1.7	2.30	2.0	1.2
4	14	-	8	8.96	2.3	2.87	2.5	1.8
5	16	-	10	11.20	2.8	3.44	3.0	2.3
6	18	-	12	13.44	3.3	4.58	4.0	2.5
8	22	-	16	17.92	4.4	5.72	5.0	3.5
10	26	-	20	22.40	5.5	6.86	6.0	4.4
12	30	-	24	26.88	6.5	9.15	8.0	4.6
16	38	44	30	33.60	7.5	11.43	10.0	5.3
20	46	52	36	40.32	8.5	13.72	12.0	5.9
24	54	60	39	43.68	14	16.00	14.0	10.3

MATERIAL: STAINLESS STEEL


DIN 7991, 10.9 GRADE

Thread	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1	M8 x 1.25	M10 x 1.5	M12 x 1.75	M16 x 2.0	M20 x 2.5	M24 x 3.0
Length MM										
6	SHFSSM-03-06	SHFSSM-04-06	SHFSSM-05-06	-	-	-	-	-	-	-
8	SHFSSM-03-08	SHFSSM-04-08	SHFSSM-05-08	SHFSSM-06-08	-	-	-	-	-	-
10	SHFSSM-03-10	SHFSSM-04-10	SHFSSM-05-10	SHFSSM-06-10	SHFSSM-08-10	-	-	-	-	-
12	SHFSSM-03-12	SHFSSM-04-12	SHFSSM-05-12	SHFSSM-06-12	SHFSSM-08-12	-	-	-	-	-
14	-	SHFSSM-04-14	SHFSSM-05-14	SHFSSM-06-14	SHFSSM-08-14	SHFSSM-10-14	-	-	-	-
16	SHFSSM-03-16	SHFSSM-04-16	SHFSSM-05-16	SHFSSM-06-16	SHFSSM-08-16	SHFSSM-10-16	-	-	-	-
18	-	SHFSSM-04-18	-	SHFSSM-06-18	SHFSSM-08-18	SHFSSM-10-18	-	-	-	-
20	-	SHFSSM-04-20	SHFSSM-05-20	SHFSSM-06-20	-	SHFSSM-10-20	SHFSSM-12-20	-	-	-
22	-	SHFSSM-04-22	SHFSSM-05-22	SHFSSM-06-22	SHFSSM-08-22	SHFSSM-10-22	-	-	-	-
25	-	SHFSSM-04-25	SHFSSM-05-25	SHFSSM-06-25	SHFSSM-08-25	SHFSSM-10-25	SHFSSM-12-25	-	-	-
30	-	SHFSSM-04-30	SHFSSM-05-30	SHFSSM-06-30	SHFSSM-08-30	SHFSSM-10-30	SHFSSM-12-30	-	-	-
35	-	SHFSSM-04-35	SHFSSM-05-35	SHFSSM-06-35	SHFSSM-08-35	SHFSSM-10-35	SHFSSM-12-35	SHFSSM-16-35	SHFSSM-20-35	-
40	-	SHFSSM-04-40	SHFSSM-05-40	SHFSSM-06-40	SHFSSM-08-40	SHFSSM-10-40	SHFSSM-12-40	SHFSSM-16-40	SHFSSM-20-40	-
45	-	SHFSSM-04-45	SHFSSM-05-45	SHFSSM-06-45	SHFSSM-08-45	SHFSSM-10-45	SHFSSM-12-45	SHFSSM-16-45	SHFSSM-20-45	-
50	-	SHFSSM-04-50	SHFSSM-05-50	SHFSSM-06-50	SHFSSM-08-50	SHFSSM-10-50	SHFSSM-12-50	SHFSSM-16-50	SHFSSM-20-50	SHFSSM-24-50
55	-	-	SHFSSM-05-55	SHFSSM-06-55	SHFSSM-08-55	SHFSSM-10-55	SHFSSM-12-55	SHFSSM-16-55	-	SHFSSM-24-55
60	-	-	SHFSSM-05-60	SHFSSM-06-60	SHFSSM-08-60	SHFSSM-10-60	SHFSSM-12-60	SHFSSM-16-60	SHFSSM-20-60	SHFSSM-24-60
65	-	-	-	-	-	SHFSSM-10-65	SHFSSM-12-65	-	-	-
70	-	-	-	SHFSSM-06-70	SHFSSM-08-70	SHFSSM-10-70	SHFSSM-12-70	SHFSSM-16-70	SHFSSM-20-70	SHFSSM-24-70
80	-	-	-	SHFSSM-06-80	SHFSSM-08-80	SHFSSM-10-80	SHFSSM-12-80	SHFSSM-16-80	SHFSSM-20-80	SHFSSM-24-80
90	-	-	-	-	SHFSSM-08-90	SHFSSM-10-90	SHFSSM-12-90	SHFSSM-16-90	SHFSSM-20-90	SHFSSM-24-90
100	-	-	-	-	SHFSSM-08-100	SHFSSM-10-100	SHFSSM-12-100	SHFSSM-16-100	SHFSSM-20-100	SHFSSM-24-100
110	-	-	-	-	-	-	SHFSSM-12-110	SHFSSM-16-110	SHFSSM-20-110	SHFSSM-24-110
120	-	-	-	-	-	-	SHFSSM-12-120	SHFSSM-16-120	SHFSSM-20-120	SHFSSM-24-120
130	-	-	-	-	-	-	-	SHFSSM-16-130	SHFSSM-20-130	SHFSSM-24-130
140	-	-	-	-	-	-	-	SHFSSM-16-140	SHFSSM-20-140	SHFSSM-24-140
150	-	-	-	-	-	-	-	SHFSSM-16-150	SHFSSM-20-150	SHFSSM-24-150
160	-	-	-	-	-	-	-	SHFSSM-16-160	SHFSSM-20-160	-
180	-	-	-	-	-	-	-	SHFSSM-16-180	SHFSSM-20-180	-
200	-	-	-	-	-	-	-	SHFSSM-16-200	SHFSSM-20-200	-

BUTTON HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC THREADS

DIMENSIONS & SPECIFICATIONS

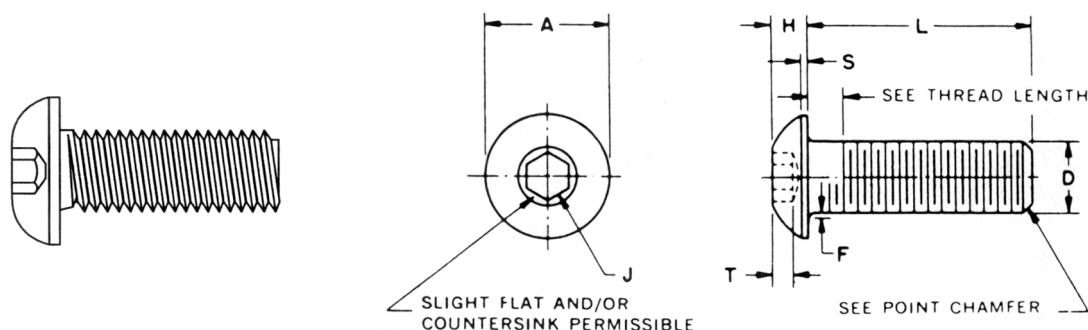

D	Nominal Size or Basic Screw Diameter	A		H		S	J		T	F		L
		Head Diameter		Head Height		Head Side Height	Hexagon Socket Size		Key Engagement	Fillet Exten. Above D		Max. Stndrd. Length
		Max.	Min.	Max.	Min.	Ref.	Nom.		Min.	Max.	Min.	Nom.
0	0.0600	0.114	0.104	0.032	0.026	0.010	0.035		0.020	0.010	0.005	1/2
1	0.0730	0.139	0.129	0.039	0.033	0.010	0.050		0.028	0.010	0.005	1/2
2	0.0860	0.164	0.154	0.046	0.038	0.010	0.050		0.028	0.010	0.005	1/2
3	0.0990	0.188	0.176	0.052	0.044	0.010	1/16	0.062	0.035	0.010	0.005	1/2
4	0.1120	0.213	0.201	0.059	0.051	0.015	1/16	0.062	0.035	0.010	0.005	1/2
5	0.1250	0.238	0.226	0.066	0.058	0.015	5/64	0.078	0.044	0.010	0.005	1/2
6	0.1380	0.262	0.250	0.073	0.063	0.015	5/64	0.078	0.044	0.010	0.005	5/8
8	0.1640	0.312	0.298	0.087	0.077	0.015	3/32	0.094	0.052	0.015	0.010	3/4
10	0.1900	0.361	0.347	0.101	0.091	0.020	1/8	0.125	0.070	0.015	0.010	1
1/4	0.2500	0.437	0.419	0.132	0.122	0.031	5/32	0.156	0.087	0.020	0.015	1
5/16	0.3125	0.547	0.527	0.166	0.152	0.031	3/16	0.188	0.105	0.020	0.015	1
3/8	0.3750	0.656	0.636	0.199	0.185	0.031	7/32	0.219	0.122	0.020	0.015	1-1/4
1/2	0.5000	0.875	0.851	0.265	0.245	0.046	5/16	0.312	0.175	0.030	0.020	2
5/8	0.6250	1.000	0.970	0.331	0.311	0.062	3/8	0.375	0.210	0.030	0.020	2

This product is designed and recommended for light fastening applications such as guards, hinges, etc. It is not suggested for use in critical high strength applications where socket head cap screws should normally be used.

1. HEAD HEIGHT. The values for H, listed in the tables, represent metal to metal measurements; that is, the truncation of the rounded surface caused by the socket is not considered part of the head height.

2. LENGTH OF SCREW (L). The length of the screw shall be measured, on a line parallel to the axis, from the plane of the bearing surface under the head to the plane of the flat of the point.

3. LENGTH TOLERANCES	Nominal Screw Size (Incl.)	
	0 thru 3/8	1/2 thru 5/8
Nominal Lengths (L)		
Up to 1 in., incl.	-0.03	-0.03
Over 1 in. to 2-1/2, incl.	-0.04	-0.06

4. THREAD LENGTH. For screw lengths listed in Column L or shorter, the complete thread shall extend to within 2 threads of the bearing surface of the head. The complete thread length on screws longer than listed in Column L will be at the option of Harcourt Industrial Co. between the minimum limit of twice the diameter plus 1/2" and the maximum limit where the threading extends to within 2 threads of the head.

5. SCREW POINT CHAMFER. The points of sizes #10 and larger shall be chamfered. Chamfering of screw sizes up to and including #8 shall be optional.

6. FILLET (F). For all lengths of screws, the form of the fillet shall be optional, provided it fairs into the bearing surface within the limits of the thread major diameter maximum plus F maximum, and the thread major diameter minimum, plus F minimum, and is a smooth and continuous curve.

7. BEARING SURFACE. The plane of the bearing surface shall be perpendicular to the axis of the shank within a maximum of 2°.

8. CONCENTRICITY. The head shall be concentric to the axis of the shank of the screw within 3% of the maximum head diameter (dimension A) or .008" total runout - whichever is greater.

9. THREADS. Threads shall be Unified external threads with radius root: Class 3A UNRC and UNRF Series.

10. MATERIAL. Steel, high grade alloy, hardened by quenching in oil from the hardening temperature and tempered to a Rockwell C 38-44.

Caution: Information is for general reference only. For more complete specifications consult the current edition of standard ANSI/ASME B18.3, or contact Harcourt Industrial Inc.


BUTTON HEAD HEX SOCKET CAP SCREWS

INCH SIZES, UNC & UNF THREADS

(SEE DIMENSIONS & SPECIFICATIONS PAGE FOR MATERIAL, ETC.)



MATERIAL: ALLOY STEEL



Length	#4-40	#6-32	#8-32	#8-36	#10-24	#10-32	1/4-20
1/4	SHBS-440-04	SHBS-632-04	SHBS-832-04	SHBS-836-04*	SHBS-1024-04	SHBS-1032-04	-
5/16	-	SHBS-632-05*	-	-	-	-	-
3/8	SHBS-440-06	SHBS-632-06	SHBS-832-06	SHBS-836-06*	SHBS-1024-06	SHBS-1032-06	SHBS-1420-06
1/2	SHBS-440-08	SHBS-632-08	SHBS-832-08	SHBS-836-08*	SHBS-1024-08	SHBS-1032-08	SHBS-1420-08
5/8	-	SHBS-632-10	SHBS-832-10	-	SHBS-1024-10	SHBS-1032-10	SHBS-1420-10
3/4	-	-	SHBS-832-12	-	SHBS-1024-12	SHBS-1032-12	SHBS-1420-12
7/8	-	-	-	-	SHBS-1024-14	SHBS-1032-14	SHBS-1420-14
1	-	-	-	-	SHBS-1024-16	SHBS-1032-16	SHBS-1420-16
1-1/4	-	-	-	-	-	-	SHBS-1420-20*
1-1/2	-	-	-	-	-	SHBS-1032-24*	SHBS-1420-24*
1-3/4	-	-	-	-	-	-	SHBS-1420-28*


Length	1/4-28	5/16-18	5/16-24	3/8-16	3/8-24	1/2-13	5/8-11
3/8	SHBS-1428-06	SHBS-51618-06	-	-	-	-	-
1/2	SHBS-1428-08	SHBS-51618-08	SHBS-51624-08	SHBS-3816-08	SHBS-3824-08	-	-
5/8	SHBS-1428-10	SHBS-51618-10	SHBS-51624-10	SHBS-3816-10	-	-	-
3/4	SHBS-1428-12	SHBS-51618-12	SHBS-51624-12	SHBS-3816-12	-	SHBS-1213-12*	-
7/8	-	SHBS-51618-14	-	SHBS-3816-14	-	-	-
1	SHBS-1428-16	SHBS-51618-16	SHBS-51624-16	SHBS-3816-16	SHBS-3824-16	SHBS-1213-16	SHBS-5811-16
1-1/4	-	SHBS-51618-20*	-	SHBS-3816-20	-	SHBS-1213-20	SHBS-5811-20
1-1/2	-	SHBS-51618-24*	-	SHBS-3816-24*	-	SHBS-1213-24	SHBS-5811-24
1-3/4	-	-	-	SHBS-3816-28*	-	-	-
2	-	-	-	SHBS-3816-32*	-	SHBS-1213-32	SHBS-5811-32
2-1/4	-	-	-	SHBS-3816-36*	-	-	-

*Indicates a semi-standard product, usually in stock

PACKAGE QUANTITIES

Diameter	100	50	25
Through 5/16	All	-	-
3/8	-	All	-
1/2 and 5/8	-	-	All

BUTTON HEAD HEX SOCKET CAP SCREWS
INCH SIZES, UNC & UNF THREADS
MATERIAL: STAINLESS STEEL 18-8 (A2)
CLASS FIT 3A



Length	#4-40	#6-32	#8-32	#10-24	#10-32
1/4	SHBSS-440-04	SHBSS-632-04	SHBSS-832-04	SHBSS-1024-04	SHBSS-1032-04
5/16	-	-	-	-	-
3/8	SHBSS-440-06	SHBSS-632-06	SHBSS-832-06	SHBSS-1024-06	SHBSS-1032-06
1/2	SHBSS-440-08	SHBSS-632-08	SHBSS-832-08	SHBSS-1024-08	SHBSS-1032-08
5/8	-	SHBSS-632-10	SHBSS-832-10	SHBSS-1024-10	SHBSS-1032-10
3/4	-	SHBSS-632-12	SHBSS-832-12	SHBSS-1024-12	SHBSS-1032-12
7/8	-	-	SHBSS-832-16	SHBSS-1024-14	SHBSS-1032-14
1	-	-	-	SHBSS-1024-16	SHBSS-1032-16

Length	1/4-20	5/16-18	3/8-16	1/2-13
3/8	SHBSS-1420-06	-	-	-
1/2	SHBSS-1420-08	SHBSS-51618-08	-	-
5/8	SHBSS-1420-10	SHBSS-51618-10	-	-
3/4	SHBSS-1420-12	SHBSS-51618-12	SHBSS-3816-12	-
7/8	SHBSS-1420-14	SHBSS-51618-14	-	-
1	SHBSS-1420-16	SHBSS-51618-16	SHBSS-3816-16	SHBSS-1213-16
1-1/4	-	-	SHBSS-3816-20	SHBSS-1213-20
1-1/2	-	-	SHBSS-3816-24	SHBSS-1213-24

PACKAGE QUANTITIES


Diameter	100	50	25
Through 5/16	All	-	-
3/8	-	All	-
1/2 and 5/8	-	-	All

BUTTON HEAD HEX SOCKET CAP SCREWS

METRIC SIZES: THREAD CLASS 4g 6g

MATERIAL: ALLOY STEEL ISO 12.9

HARDNESS: RC 38-43

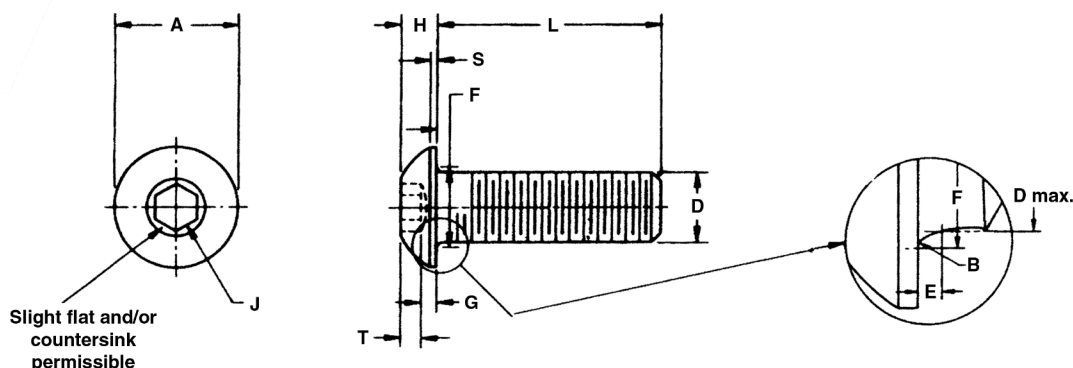


D		A		H		S	J	T	G	F		E	B	L
Nominal Size or Basic Screw Diameter	Thread Pitch	Head Diameter		Head Height		Head Side Height	Hexagon Socket Size	Key Engagement	Wall Thickness	Under Head Fillet			Max. Standard Length	
										Transition Diameter		Transition Length	Juncture Radius	
		Max.	Min.	Max.	Min.	Ref.	Nom.	Min.	Min.	Max.	Min.	Max.	Min.	Nom.
3	0.5	5.70	5.40	1.65	1.43	0.38	2	1.04	0.20	3.6	3.2	0.51	0.10	16
4	0.7	7.60	7.24	2.20	1.95	0.38	2.5	1.30	0.30	4.7	4.4	0.60	0.20	20
5	0.8	9.50	9.14	2.75	2.50	0.50	3	1.56	0.38	5.7	5.4	0.60	0.20	30
6	1	10.50	10.07	3.30	3.00	0.80	4	2.08	0.74	6.8	6.5	0.68	0.25	30
8	1.25	14.00	13.57	4.40	4.05	0.80	5	2.60	1.05	9.2	8.8	1.02	0.40	40
10	1.5	17.50	17.07	5.50	5.20	0.80	6	3.12	1.45	11.2	10.8	1.02	0.40	40
12	1.75	21.00	20.48	6.60	6.24	0.80	8	4.16	1.63	14.2	13.2	1.87	0.60	60

D Size L Length	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75
6	SHBSM-03-06	-	-	-	-	-	-
8	SHBSM-03-08	SHBSM-04-08	-	-	-	-	-
10	SHBSM-03-10	SHBSM-04-10	SHBSM-05-10	SHBSM-06-10	SHBSM-08-10	-	-
12	SHBSM-03-12	SHBSM-04-12	SHBSM-05-12	SHBSM-06-12	SHBSM-08-12	-	-
16	SHBSM-03-16	SHBSM-04-16	SHBSM-05-16	SHBSM-06-16	SHBSM-08-16	SHBSM-10-16	SHBSM-12-16
20	-	SHBSM-04-20	SHBSM-05-20	SHBSM-06-20	SHBSM-08-20	SHBSM-10-20	SHBSM-12-20
25	-	-	SHBSM-05-25	SHBSM-06-25	SHBSM-08-25	SHBSM-10-25	SHBSM-12-25
30	-	-	SHBSM-05-30	SHBSM-06-30	SHBSM-08-30	SHBSM-10-30	SHBSM-12-30
35	-	-	-	-	SHBSM-08-35	SHBSM-10-35	SHBSM-12-35
40	-	-	-	-	SHBSM-08-40	SHBSM-10-40	SHBSM-12-40
45	-	-	-	-	-	-	SHBSM-12-45
50	-	-	-	-	-	-	SHBSM-12-50
55	-	-	-	-	-	-	SHBSM-12-55
60	-	-	-	-	-	-	SHBSM-12-60

BUTTON HEAD HEX SOCKET CAP SCREWS

METRIC SIZES: THREAD CLASS 4g 6g


MATERIAL: STAINLESS STEEL 18-8 (A2)

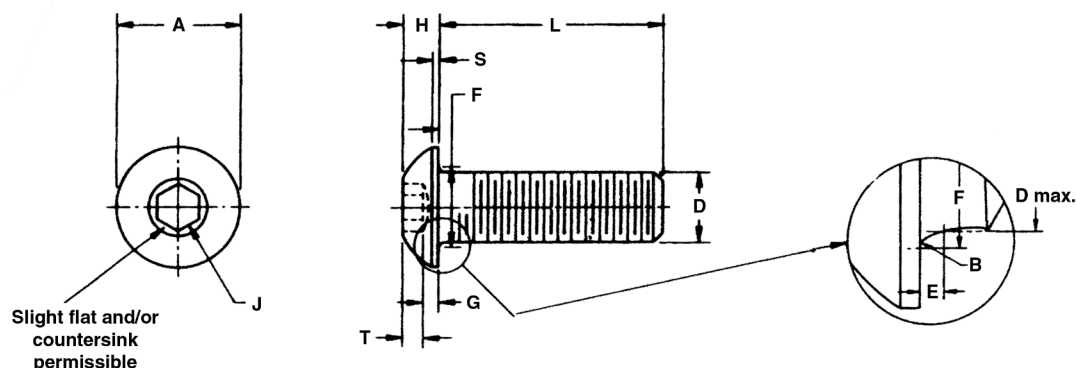

D		A		H		S	J	T	G	F		E	B	L
Nominal Size or Basic Screw Diameter	Thread Pitch	Head Diameter		Head Height		Head Side Height	Hexagon Socket Size	Key Engagement	Wall Thickness	Under Head Fillet			Max. Standard Length	
										Transition Diameter		Transition Length	Juncture Radius	
		Max.	Min.	Max.	Min.	Ref.	Nom.	Min.	Min.	Max.	Min.	Max.	Min.	Nom.
3	0.5	5.70	5.40	1.65	1.43	0.38	2	1.04	0.20	3.6	3.2	0.51	0.10	16
4	0.7	7.60	7.24	2.20	1.95	0.38	2.5	1.30	0.30	4.7	4.4	0.60	0.20	20
5	0.8	9.50	9.14	2.75	2.50	0.50	3	1.56	0.38	5.7	5.4	0.60	0.20	30
6	1	10.50	10.07	3.30	3.00	0.80	4	2.08	0.74	6.8	6.5	0.68	0.25	30
8	1.25	14.00	13.57	4.40	4.05	0.80	5	2.60	1.05	9.2	8.8	1.02	0.40	40
10	1.5	17.50	17.07	5.50	5.20	0.80	6	3.12	1.45	11.2	10.8	1.02	0.40	40
12	1.75	21.00	20.48	6.60	6.24	0.80	8	4.16	1.63	14.2	13.2	1.87	0.60	60

D Size L Length	M3 x 0.5	M4 x 0.7	M5 x 0.8	M6 x 1.0	M8 x 1.25	M10 x 1.5	M12 x 1.75
6	SHBSSM-03-06	-	-	-	-	-	-
8	SHBSSM-03-08	SHBSSM-04-08	-	-	-	-	-
10	SHBSSM-03-10	SHBSSM-04-10	SHBSSM-05-10	SHBSSM-06-10	SHBSSM-08-10	-	-
12	SHBSSM-03-12	SHBSSM-04-12	SHBSSM-05-12	SHBSSM-06-12	SHBSSM-08-12	-	-
16	SHBSSM-03-16	SHBSSM-04-16	SHBSSM-05-16	SHBSSM-06-16	SHBSSM-08-16	SHBSSM-10-16	SHBSSM-12-16
20	-	SHBSSM-04-20	SHBSSM-05-20	SHBSSM-06-20	SHBSSM-08-20	SHBSSM-10-20	SHBSSM-12-20
25	-	-	SHBSSM-05-25	SHBSSM-06-25	SHBSSM-08-25	SHBSSM-10-25	SHBSSM-12-25
30	-	-	SHBSSM-05-30	SHBSSM-06-30	SHBSSM-08-30	SHBSSM-10-30	SHBSSM-12-30
35	-	-	-	-	SHBSSM-08-35	SHBSSM-10-35	SHBSSM-12-35
40	-	-	-	-	SHBSSM-08-40	SHBSSM-10-40	SHBSSM-12-40
45	-	-	-	-	-	-	SHBSSM-12-45
50	-	-	-	-	-	-	SHBSSM-12-50
55	-	-	-	-	-	-	SHBSSM-12-55
60	-	-	-	-	-	-	SHBSSM-12-60

LOW-HEAD SOCKET CAP SCREWS
INCH SIZES, THREAD CLASS FIT 3A
MATERIAL: HARDNESS ROCKWELL C 38-43

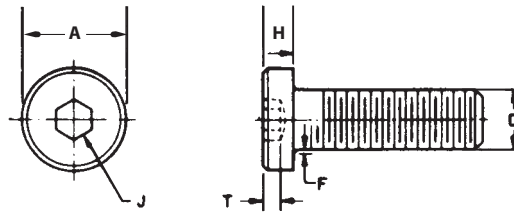


DIMENSIONS:

Nominal Size	Basic Screw Diam. D	A-Head Diameter		H-Head Height		J-Hex Socket Size	T-Key Engagement Min.	F Fillet Above D	
		Max.	Min.	Max.	Min.			Max.	Min.
8	0.1640	.270	.265	.082	.079	.0781	.060	.012	.007
10	0.1900	.312	.307	.095	.092	.093	.072	.014	.009
1/4	0.2500	.375	.369	.125	.121	.1250	.094	.014	.009
5/16	0.3125	.437	.431	.156	.152	.1562	.120	.017	.012
3/8	0.3750	.562	.556	.187	.182	.1875	.145	.020	.015
7/16	0.4375	.625	.618	.218	.213	.2188	.166	.023	.018
1/2	0.5000	.750	.743	.250	.244	.2500	.184	.026	.020
5/8	0.6250	.875	.867	.312	.306	.3125	.250	.032	.024

Dia. Len.	#8-32	#10-24	#10-32	1/4-20	5/16-18	3/8-16	1/2-13
3/8	SLCS-832-06	SLCS-1024-06	SLCS-1032-06	SLCS-1420-06	-	-	-
1/2	SLCS-832-08	SLCS-1024-08	SLCS-1032-08	SLCS-1420-08	SLCS-51618-08	SLCS-3816-08	-
5/8	SLCS-832-10	SLCS-1024-10	SLCS-1032-10	SLCS-1420-10	SLCS-51618-10	SLCS-3816-10	-
3/4	SLCS-832-12	SLCS-1024-12	SLCS-1032-12	SLCS-1420-12	SLCS-51618-12	SLCS-3816-12	SLCS-1213-12
1	SLCS-832-16	SLCS-1024-16	SLCS-1032-16	SLCS-1420-16	SLCS-51618-16	SLCS-3816-16	SLCS-1213-16
1-1/4	-	-	-	SLCS-1420-20	SLCS-51618-20	SLCS-3816-20	SLCS-1213-20
1-1/2	-	-	-	-	SLCS-51618-24	SLCS-3816-24	SLCS-1213-24

NOTE: Low Head Socket Cap Screws should not be subjected to high dynamic loads, and should not be used in critical high strength applications.

LOW-HEAD SOCKET CAP SCREWS GR.10.9
METRIC SIZES, THREAD 4g 6g
MATERIAL: HARDNESS ROCKWELL C 33-39 DIN 7984

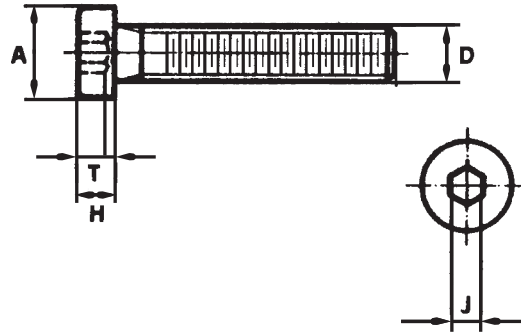

DIMENSIONS:

Nominal Size and Thread Pitch	D		A		H	J	T
	Body Diameter		Head Diameter		Head Height	Hexagon Socket Size	Key Engagement
	Max.	Min.	Max.	Min.			
M4x0.7	4.00	3.82	7.00	6.80	2.8	3.0	1.48
M5x0.7	5.00	4.82	8.50	8.27	3.5	4.0	1.85
M6x1.0	6.00	5.80	10.00	9.74	4.0	5.0	2.09
M8x1.25	8.00	7.78	13.00	12.70	5.0	6.0	2.48
M10x1.50	10.00	9.78	16.00	15.67	6.5	8.0	3.36
M12x1.75	12.00	11.78	18.00	17.64	7.0	8.0	4.96
M16x2.0	16.00	15.76	24.00	23.60	9.0	12.0	5.48
M20x2.5	20.00	19.70	30.00	29.57	11.0	14.0	7.48


Dia. Len.	M4 x 0.7	M5 x 0.7	M6 x 1.0	M8 x 1.25	M10 x 1.50	M12 x 1.75	M16 x 2.0	M20 x 2.5
6	SLCSM-04-06	-	-	-	-	-	-	-
8	SLCSM-04-08	-	SLCSM-06-08	-	-	-	-	-
10	SLCSM-04-10	SLCSM-05-10	SLCSM-06-10	SLCSM-08-10	-	-	-	-
12	SLCSM-04-12	SLCSM-05-12	SLCSM-06-12	SLCSM-08-12	SLCSM-10-12	-	-	-
16	SLCSM-04-16	SLCSM-05-16	SLCSM-06-16	SLCSM-08-16	SLCSM-10-16	-	-	-
20	SLCSM-04-20	SLCSM-05-20	SLCSM-06-20	SLCSM-08-20	SLCSM-10-20	SLCSM-12-20	-	-
25	SLCSM-04-25	SLCSM-05-25	SLCSM-06-25	SLCSM-08-25	SLCSM-10-25	SLCSM-12-25	-	-
30	-	-	SLCSM-06-30	SLCSM-08-30	SLCSM-10-30	SLCSM-12-30	SLCSM-16-30	-
35	-	-	-	SLCSM-08-35	SLCSM-10-35	SLCSM-12-35	SLCSM-16-35	-
40	-	-	-	SLCSM-08-40	SLCSM-10-40	SLCSM-12-40	SLCSM-16-40	SLCSM-20-40
45	-	-	-	SLCSM-08-45	SLCSM-10-45	SLCSM-12-45	SLCSM-16-45	-
50	-	-	-	SLCSM-08-50	SLCSM-10-50	SLCSM-12-50	SLCSM-16-50	SLCSM-20-50
60	-	-	-	SLCSM-08-60	SLCSM-10-60	SLCSM-12-60	SLCSM-16-60	SLCSM-20-60
70	-	-	-	SLCSM-08-70	SLCSM-10-70	-	SLCSM-16-70	SLCSM-20-70
80	-	-	-	-	SLCSM-10-80	SLCSM-12-80	SLCSM-16-80	SLCSM-20-80
90	-	-	-	-	-	SLCSM-12-90	SLCSM-16-90	SLCSM-20-90
100	-	-	-	-	-	SLCSM-12-100	-	SLCSM-20-100

NOTE: Low Head Socket Cap Screws should not be subjected to high dynamic loads, and should not be used in critical high strength applications.

HEX SOCKET SET SCREWS

MATERIAL: ALLOY STEEL

HEAT-TREATED to ROCKWELL C 45-53

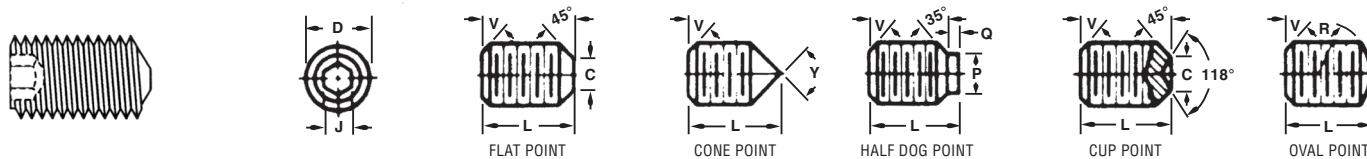

DIMENSIONS:

D Thread Size	Threads Per Inch		C Cup and Flat Point Diameter		R Oval Point	Cone Point Angle 90° ± 2° For These Nominal Lengths or Longer; 118° ± 2° For Shorter Nominal Lengths	P Dog Point Diameter		Q Half Dog Point Length	J Socket Width Across Flats	T Key Engage- ment	Shortest Length To Which T Applies
	Nominal	Coarse	Fine	Min.	Max.		Min.	Max.	Nominal	Nominal	Min.	
No. 0	-	80	.027	.033	.045	5/64	.037	.040	.015	.028	.050	7/64
No. 1	64	72	.033	.040	.055	3/32	.045	.049	.019	.035	.060	1/8
No. 2	56	64	.039	.047	.064	7/64	.053	.057	.022	.035	.060	1/8
No. 3	48	56	.045	.054	.074	1/8	.062	.066	.025	.050	.070	9/64
No. 4	40	48	.051	.061	.084	5/32	.070	.075	.028	.050	.070	9/64
No. 5	40	44	.057	.067	.094	3/16	.078	.083	.030	1/16	.080	3/16
No. 6	32	40	.064	.074	.104	3/16	.087	.092	.035	1/16	.080	11/64
No. 8	32	36	.076	.087	.123	1/4	.103	.109	.040	5/64	.090	3/16
No. 10	24	32	.088	.102	.142	1/4	.120	.127	.045	3/32	.100	3/16
1/4	20	28	.118	.132	.188	5/16	.149	.156	1/16	1/8	.125	1/4
5/16	18	24	.156	.172	.234	3/8	.195	.203	5/64	5/32	.156	5/16
3/8	16	24	.194	.212	.281	7/16	.241	.250	3/32	3/16	.188	3/8
7/16	14	20	.232	.252	.328	1/2	.287	.297	7/64	7/32	.219	7/16
1/2	13	20	.270	.291	.375	9/16	.334	.344	1/8	1/4	.250	1/2
5/8	11	18	.347	.371	.469	3/4	.456	.469	5/32	5/16	.312	5/8
3/4	10	16	.425	.450	.562	7/8	.549	.562	3/16	3/8	.375	3/4
7/8	9	14	.502	.530	.656	1	.642	.656	7/32	1/2	.500	7/8
1	8	14	.579	.609	.750	1-1/8	.734	.750	1/4	9/16	.562	1
1-1/4	7	12	.733	.767	.938	1-1/2	.920	.938	5/16	5/8	.625	1-1/4
1-1/2	6	12	.886	.926	1.125	1-3/4	1.105	1.125	3/8	3/4	.750	1-1/2

HEX SOCKET CUP POINT SET SCREWS - ALLOY STEEL

Length	#0 - 80	#1 - 72	#2 - 56	#3 - 48	#4 - 40	#4 - 48	#5 - 40	#6 - 32	#6 - 40	#8 - 32	#8 - 36	#10 - 24	#10 - 32
1/16	SCP-080-01	SCP-172-01	SCP-256-01	-	-	-	-	-	-	-	-	-	-
3/32	SCP-080-015	SCP-172-015	SCP-256-015	SCP-348-015	-	-	-	-	-	-	-	-	-
1/8	SCP-080-02	SCP-172-02	SCP-256-02	SCP-348-02	SCP-440-02	SCP-448-02	SCP-540-02	SCP-632-02	SCP-640-02	SCP-832-02	SCP-836-02	SCP-1024-02*	SCP-1032-02*
3/16	SCP-080-03	SCP-172-03	SCP-256-03	SCP-348-03	SCP-440-03	SCP-448-03	SCP-540-03	SCP-632-03	SCP-640-03	SCP-832-03	SCP-836-03	SCP-1024-03	SCP-1032-03
1/4	SCP-080-04	SCP-172-04	SCP-256-04	SCP-348-04	SCP-440-04	-	SCP-540-04	SCP-632-04	SCP-640-04	SCP-832-04	SCP-836-04	SCP-1024-04	SCP-1032-04
5/16	-	-	-	-	SCP-440-05	-	SCP-540-05	SCP-632-05	-	SCP-832-05	-	SCP-1024-05	SCP-1032-05
3/8	-	-	-	-	SCP-440-06	-	SCP-540-06	SCP-632-06	SCP-640-06	SCP-832-06	SCP-836-06	SCP-1024-06	SCP-1032-06
7/16	-	-	-	-	-	-	-	SCP-632-07	-	SCP-832-07	-	-	-
1/2	-	-	-	-	SCP-440-08	-	SCP-540-08	SCP-632-08	-	SCP-832-08	-	SCP-1024-08	SCP-1032-08
5/8	-	-	-	-	SCP-440-10	-	SCP-540-10	SCP-632-10	-	SCP-832-10	-	SCP-1024-10	SCP-1032-10
3/4	-	-	-	-	-	-	SCP-540-12	SCP-632-12	-	SCP-832-12	-	SCP-1024-12	SCP-1032-12
7/8	-	-	-	-	-	-	-	SCP-632-14	-	SCP-832-14	-	SCP-1024-14	SCP-1032-14
1	-	-	-	-	-	-	-	SCP-632-16	-	SCP-832-16	-	SCP-1024-16	SCP-1032-16
1-1/4	-	-	-	-	-	-	-	-	-	-	-	SCP-1024-20	SCP-1032-20
1-1/2	-	-	-	-	-	-	-	-	-	-	-	-	SCP-1032-24*

*Indicates a semi-standard product, usually in stock

Continued on next page . . .

HEX SOCKET SET SCREWS, Continued

MATERIAL: ALLOY STEEL

HEAT-TREATED to ROCKWELL C 45-53



HEX SOCKET CUP POINT SET SCREWS - ALLOY STEEL

Length	1/4		5/16		3/8		7/16		1/2	
	-20	-28	-18	-24	-16	-24	-14	-20	-13	-20
3/16	SCP-1420-03	SCP-1428-03	-	-	-	-	-	-	-	-
1/4	SCP-1420-04	SCP-1428-04	SCP-51618-04	SCP-51624-04	SCP-3816-04	SCP-3824-04	-	-	-	-
5/16	SCP-1420-05	SCP-1428-05	SCP-51618-05	SCP-51624-05	SCP-3816-05	SCP-3824-05	-	-	-	-
3/8	SCP-1420-06	SCP-1428-06	SCP-51618-06	SCP-51624-06	SCP-3816-06	SCP-3824-06	SCP-71614-06	SCP-71620-06	SCP-1213-06	SCP-1220-06*
7/16	SCP-1420-07	SCP-1428-07	SCP-51618-07	SCP-51624-07	SCP-3816-07	SCP-3824-07	SCP-71614-07	SCP-71620-07	-	-
1/2	SCP-1420-08	SCP-1428-08	SCP-51618-08	SCP-51624-08	SCP-3816-08	SCP-3824-08	SCP-71614-08	SCP-71620-08	SCP-1213-08	SCP-1220-08
5/8	SCP-1420-10	SCP-1428-10	SCP-51618-10	SCP-51624-10	SCP-3816-10	SCP-3824-10	SCP-71614-10	SCP-71620-10*	SCP-1213-10	SCP-1220-10
3/4	SCP-1420-12	SCP-1428-12	SCP-51618-12	SCP-51624-12	SCP-3816-12	SCP-3824-12	SCP-71614-12	-	SCP-1213-12	SCP-1220-12
7/8	SCP-1420-14	SCP-1428-14	SCP-51618-14	-	SCP-3816-14	-	SCP-71614-14	-	SCP-1213-14	-
1	SCP-1420-16	SCP-1428-16	SCP-51618-16	SCP-51624-16	SCP-3816-16	SCP-3824-16	SCP-71614-16	-	SCP-1213-16	SCP-1220-16
1-1/4	SCP-1420-20	SCP-1428-20	SCP-51618-20	-	SCP-3816-20	SCP-3824-20	SCP-71614-20	-	SCP-1213-20	SCP-1220-20*
1-1/2	SCP-1420-24	-	SCP-51618-24	-	SCP-3816-24	SCP-3824-24	SCP-71614-24	-	SCP-1213-24	SCP-1220-24*
1-3/4	SCP-1420-28	-	SCP-51618-28	-	SCP-3816-28	-	-	-	SCP-1213-28	SCP-1220-28*
2	SCP-1420-32	-	SCP-51618-32	-	SCP-3816-32	-	SCP-71614-32	-	SCP-1213-32	SCP-1220-32*
2-1/2	-	-	-	-	SCP-3816-40	-	-	-	SCP-1213-40	SCP-1220-40*
3	-	-	-	-	SCP-3816-48*	-	-	-	SCP-1213-48	-
3-1/2	-	-	-	-	-	-	-	-	SCP-1213-56*	-
3-3/4	-	-	-	-	-	-	-	-	SCP-1213-60*	-
4	-	-	-	-	-	-	-	-	SCP-1213-64*	-

Length	5/8		3/4		7/8		1"		1-1/4 - 7	1-1/2 - 6
	-11	-18	-10	-16	-9	-14	-8	-14		
1/2	SCP-5811-08	SCP-5818-08*	-	-	-	-	-	-	-	-
5/8	SCP-5811-10	SCP-5818-10	SCP-3410-10	SCP-3416-10*	-	-	-	-	-	-
3/4	SCP-5811-12	-	SCP-3410-12	-	-	-	-	SCP-114-12*	-	-
7/8	-	-	-	-	SCP-789-14	SCP-7814-14*	-	-	-	-
1	SCP-5811-16	SCP-5818-16	SCP-3410-16	SCP-3416-16*	SCP-789-16	SCP-7814-16*	SCP-18-16	SCP-114-16*	SCP-1147-16*	-
1-1/4	SCP-5811-20	-	SCP-3410-20	SCP-3416-20*	-	-	-	-	SCP-1147-20*	-
1-1/2	SCP-5811-24	-	SCP-3410-24	SCP-3416-24*	-	-	SCP-18-24	SCP-114-24*	SCP-1147-24*	SCP-1126-24*
1-3/4	SCP-5811-28	-	SCP-3410-28	-	SCP-789-28*	-	SCP-18-28*	-	-	-
2	SCP-5811-32	-	SCP-3410-32	SCP-3416-32*	-	-	SCP-18-32	-	SCP-1147-32*	SCP-1126-32*
2-1/2	SCP-5811-40	-	SCP-3410-40	-	-	-	SCP-18-40	-	SCP-1147-40*	-
2-3/4	-	-	-	-	SCP-789-44*	-	-	-	-	-
3	SCP-5811-48	-	SCP-3410-48*	SCP-3416-48*	-	-	SCP-18-48	SCP-114-48*	SCP-1147-48*	SCP-1126-48*
4	-	-	SCP-3410-64*	-	-	-	SCP-18-64*	-	-	-
4-1/2	-	-	-	SCP-3416-72*	-	-	-	-	-	-
5	-	-	-	-	-	-	SCP-18-80*	-	-	-

*Indicates a semi-standard product, usually in stock

PACKAGE QUANTITIES:

Diameter	100	50	25	10
#1 through #10	All	-	-	-
1/4 - 3/8	Thru 1-1/2	1-3/4 - 2-1/2	-	-
7/16	Thru 3/4	7/8 - 2	-	-
1/2	Thru 3/4	7/8 - 1-1/2	1-3/4 - 3	-
5/8	Thru 1/2	5/8 - 1	1-1/4 - 2	2-1/2 - 3
3/4	-	Thru 1	1-1/4 - 1-1/2	1-3/4 - 3
7/8 and 1"	-	-	-	All

HEX SOCKET SET SCREWS - VARIOUS POINTS

INCH SIZES

MATERIAL: ALLOY STEEL



HEX SOCKET SET SCREWS – KNURLED CUP POINT

Length	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18	5/16 - 24	3/8 - 16	3/8 - 24
3/16	-	SKCU-1024-03	SKCU-1032-03	-	-	-	-	-	-
1/4	SKCU-832-04	SKCU-1024-04	SKCU-1032-04	SKCU-1420-04	SKCU-1428-04	SKCU-51618-04	-	-	-
5/16	-	-	-	SKCU-1420-05	SKCU-1248-05	SKCU-51618-05	SKCU-51624-05	-	-
3/8	-	SKCU-1024-06	SKCU-1032-06	SKCU-1420-06	-	SKCU-51618-06	SKCU-51624-06	SKCU-3816-06	-
1/2	-	SKCU-1024-08	SKCU-1032-08	SKCU-1420-08	-	SKCU-51618-08	SKCU-51624-08	SKCU-3816-08	SKCU-3824-08
5/8	-	-	-	SKCU-1420-10	-	SKCU-51618-10	-	-	-
3/4	-	-	-	SKCU-1420-12	-	SKCU-51618-12	-	-	SKCU-3824-12
1	-	-	-	-	-	SKCU-51618-16	-	-	-



HEX SOCKET SET SCREWS – FLAT POINT

Length	#4 - 40	#4 - 48	#5 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18
1/8	SFPT-440-02	-	SFPT-540-02	SFPT-632-02	SFPT-832-02	-	-	-	-	-
3/16	SFPT-440-03	SFPT-448-03*	SFPT-540-03	SFPT-632-03	SFPT-832-03	SFPT-1024-03	SFPT-1032-03	SFPT-1420-03	-	-
1/4	SFPT-440-04	-	SFPT-540-04	SFPT-632-04	SFPT-832-04	SFPT-1024-04	SFPT-1032-04	SFPT-1420-04	SFPT-1428-04	SFPT-51618-04
5/16	-	-	-	SFPT-632-05	SFPT-832-05	SFPT-1024-05	-	SFPT-1420-05	-	SFPT-51618-05
3/8	SFPT-440-06	-	-	SFPT-632-06	SFPT-832-06	SFPT-1024-06	-	SFPT-1420-06	SFPT-1428-06	SFPT-51618-06
1/2	-	-	-	-	SFPT-832-08	SFPT-1024-08	-	SFPT-1420-08	-	SFPT-51618-08
5/8	-	-	-	-	SFPT-832-10	SFPT-1024-10	-	SFPT-1420-10	-	SFPT-51618-10
3/4	-	-	-	-	-	SFPT-1024-12	-	SFPT-1420-12	-	SFPT-51618-12
1	-	-	-	-	-	-	-	SFPT-1420-16	-	SFPT-51618-16
1-1/4	-	-	-	-	-	-	-	-	-	-
3-1/2	-	-	-	-	-	-	-	-	-	-



Length	5/16 - 24	3/8 - 16	3/8 - 24	1/2 - 13	1/2 - 20	5/8 - 11	5/8 - 18	3/4 - 10	3/4 - 16	1 - 8
1/8	-	-	-	-	-	-	-	-	-	-
3/16	-	-	-	-	-	-	-	-	-	-
1/4	-	SFPT-3816-04	-	-	-	-	-	-	-	-
5/16	SFPT-51624-05	SFPT-3816-05	-	-	-	-	-	-	-	-
3/8	SFPT-51624-06	SFPT-3816-06	SFPT-3824-06	SFPT-1213-06	-	-	-	-	-	-
1/2	-	SFPT-3816-08	SFPT-3824-08	SFPT-1213-08	SFPT-1220-08	-	SFPT-5818-08*	-	-	-
5/8	-	SFPT-3816-10	-	SFPT-1213-10	-	SFPT-5811-10	-	-	SFPT-3416-10*	-
3/4	-	SFPT-3816-12	-	SFPT-1213-12	-	-	-	SFPT-3410-12*	-	-
1	-	SFPT-3816-16	-	SFPT-1213-16	-	SFPT-5811-16*	-	-	-	SFPT-18-16*
1-1/4	-	-	-	-	-	-	-	SFPT-3410-20*	-	-
3-1/2	-	-	-	-	-	-	-	-	-	SFPT-18-56*

*Indicates a semi-standard product, usually in stock

HEX SOCKET SET SCREWS – OVAL POINT

Length	#4 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18	3/8 - 16	3/8 - 24	1/2 - 13	1/2 - 20
1/8	SOVP-440-02	-	-	-	-	-	-	-	-	-	-	-
3/16	-	-	SOVP-832-03	SOVP-1024-03	SOVP-1032-03	SOVP-1420-03	-	-	-	-	-	-
1/4	-	SOVP-632-04	SOVP-832-04	SOVP-1024-04	SOVP-1032-04	SOVP-1420-04	SOVP-1428-04	SOVP-51618-04	-	-	-	-
5/16	-	SOVP-632-05	-	-	-	SOVP-1420-05	-	SOVP-51618-05	-	-	-	-
3/8	SOVP-440-06	SOVP-632-06	-	SOVP-1024-06	-	SOVP-1420-06	SOVP-1428-06	SOVP-51618-06	SOVP-3816-06	SOVP-3824-06	-	-
1/2	-	-	SOVP-832-08	SOVP-1024-08	-	SOVP-1420-08	-	SOVP-51618-08	SOVP-3816-08	SOVP-3824-08	SOVP-1213-08	SOVP-1220-08
5/8	-	-	-	-	-	SOVP-1420-10	-	SOVP-51618-10	SOVP-3816-10	-	SOVP-1213-10	-
3/4	-	-	-	-	-	SOVP-1420-12	-	SOVP-51618-12	SOVP-3816-12	-	SOVP-1213-12	-
1	-	-	-	-	-	SOVP-1420-16	-	SOVP-51618-16	SOVP-3816-16	-	SOVP-1213-16	-



Continued on next page . . .

HEX SOCKET SET SCREWS - VARIOUS POINTS
INCH SIZES
MATERIAL: ALLOY STEEL, Continued



HEX SOCKET SET SCREWS – CONE POINT

Length	1/4 - 20	1/4 - 28	3/8 - 16
1/4	SCOP-1420-04	SCOP-1428-04	-
3/8	SCOP-1420-06	SCOP-1428-06	-
1/2	SCOP-1420-08	-	SCOP-3816-08
3/4	SCOP-1420-12	SCOP-1428-12	SCOP-3816-12
1	SCOP-1420-16	-	-
2	SCOP-1420-32	-	-



HEX SOCKET SET SCREWS – HALF DOG POINT


Length	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18	5/16 - 24
3/16	SHDP-832-03	SHDP-1024-03	SHDP-1032-03	-	-	-	-
1/4	SHDP-832-04	SHDP-1024-04	SHDP-1032-04	SHDP-1420-04	SHDP-1428-04	-	-
5/16	SHDP-832-05	SHDP-1024-05	-	SHDP-1420-05	-	SHDP-51618-05	-
3/8	SHDP-832-06	SHDP-1024-06	-	SHDP-1420-06	SHDP-1428-06	SHDP-51618-06	SHDP-51624-06
1/2	SHDP-832-08	SHDP-1024-08	-	SHDP-1420-08	-	SHDP-51618-08	-
5/8	SHDP-832-10	-	-	SHDP-1420-10	-	SHDP-51618-10	-
3/4	-	-	-	SHDP-1420-12	-	SHDP-51618-12	-
7/8	-	-	-	-	-	-	-
1	-	-	-	SHDP-1420-16	-	SHDP-51618-16	-
1-1/4	-	-	-	-	-	-	-
1-1/2	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-



Length	3/8 - 16	3/8 - 24	1/2 - 13	1/2 - 20	5/8 - 11	5/8 - 18	7/8 - 9
3/16	-	-	-	-	-	-	-
1/4	-	-	-	-	-	-	-
5/16	-	-	-	-	-	-	-
3/8	SHDP-3816-06	SHDP-3824-06	-	-	-	-	-
1/2	SHDP-3816-08	SHDP-3824-08	SHDP-1213-08	SHDP-1220-08	-	-	-
5/8	SHDP-3816-10	-	SHDP-1213-10	-	SHDP-5811-10*	SHDP-5818-10	-
3/4	SHDP-3816-12	-	SHDP-1213-12	-	-	-	-
7/8	-	-	-	-	-	-	SHDP-789-14*
1	SHDP-3816-16	-	SHDP-1213-16	-	SHDP-5811-16	-	-
1-1/4	SHDP-3816-20	-	SHDP-1213-20	-	SHDP-5811-20	-	-
1-1/2	-	-	SHDP-1213-24*	-	SHDP-5811-24*	-	-
2	-	-	-	-	SHDP-5811-32*	-	SHDP-789-32*
3	-	-	-	-	-	-	SHDP-789-48*

*Indicates a semi-standard product, usually in stock

HEX SOCKET SET SCREWS - CUP POINT
INCH SIZES
MATERIAL: STAINLESS STEEL 18-8 (A-2)



INCH SIZES - STAINLESS STEEL 18-P

Length	#0 - 80	#1 - 72	#2 - 56	#3 - 48	#4 - 40	#5 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32
1/16	SCPS-080-01	SCPS-172-01	SCPS-256-01	SCPS-348-01	-	-	-	-	-	-
3/32	SCPS-080-015	SCPS-172-015	SCPS-256-015	SCPS-348-015	SCPS-440-015	-	SCPS-632-015	-	-	-
1/8	SCPS-080-02	SCPS-172-02	SCPS-256-02	SCPS-348-02	SCPS-440-02	SCPS-540-02	SCPS-632-02	SCPS-832-02	-	-
3/16	SCPS-080-03	SCPS-172-03	SCPS-256-03	SCPS-348-03	SCPS-440-03	SCPS-540-03	SCPS-632-03	SCPS-832-03	SCPS-1024-03	SCPS-1032-03
1/4	SCPS-080-04	SCPS-172-04	SCPS-256-04	SCPS-348-04	SCPS-440-04	SCPS-540-04	SCPS-632-04	SCPS-832-04	SCPS-1024-04	SCPS-1032-04
5/16	SCPS-080-05	SCPS-172-05	SCPS-256-05	SCPS-348-05	SCPS-440-05	SCPS-540-05	SCPS-632-05	SCPS-832-05	SCPS-1024-05	SCPS-1032-05
3/8	SCPS-080-06	SCPS-172-06	SCPS-256-06	SCPS-348-06	SCPS-440-06	SCPS-540-06	SCPS-632-06	SCPS-832-06	SCPS-1024-06	SCPS-1032-06
7/16	-	-	-	-	-	-	SCPS-632-07	SCPS-832-07	-	-
1/2	-	-	SCPS-256-08	-	SCPS-440-08	SCPS-540-08	SCPS-632-08	SCPS-832-08	SCPS-1024-08	SCPS-1032-08
5/8	-	-	SCPS-256-10	-	SCPS-440-10	-	SCPS-632-10	SCPS-832-10	SCPS-1024-10	SCPS-1032-10
3/4	-	-	SCPS-256-12	-	SCPS-440-12	SCPS-540-12	SCPS-632-12	SCPS-832-12	SCPS-1024-12	SCPS-1032-12
7/8	-	-	-	-	-	-	-	-	-	SCPS-1032-14
1	-	-	-	-	SCPS-440-16	SCPS-540-16	SCPS-632-16	-	-	SCPS-1032-16
1-1/4	-	-	-	-	-	-	-	-	-	SCPS-1032-20
1-1/2	-	-	-	-	-	-	-	-	-	SCPS-1032-24
1-3/4	-	-	-	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-	-	-	-

All packed 100 pcs. per box.

Length	1/4 - 20	1/4 - 28	5/16 - 18	5/16 - 24	3/8 - 16	3/8 - 24	7/16 - 14	7/16 - 20	1/2 - 13
1/16	-	-	-	-	-	-	-	-	-
3/32	-	-	-	-	-	-	-	-	-
1/8	-	-	-	-	-	-	-	-	-
3/16	SCPS-1420-03	SCPS-1428-03	-	-	-	-	-	-	-
1/4	SCPS-1420-04	SCPS-1428-04	SCPS-51618-04	SCPS-51624-04	SCPS-3816-04	SCPS-3824-04	-	-	-
5/16	SCPS-1420-05	SCPS-1428-05	SCPS-51618-05	SCPS-51624-05	SCPS-3816-05	SCPS-3824-05	-	-	-
3/8	SCPS-1420-06	SCPS-1428-06	SCPS-51618-06	SCPS-51624-06	SCPS-3816-06	SCPS-3824-06	-	-	-
7/16	-	SCPS-1428-07	SCPS-51618-07	-	SCPS-3816-07	-	-	-	SCPS-1213-06
1/2	SCPS-1420-08	SCPS-1428-08	SCPS-51618-08	SCPS-51624-08	SCPS-3816-08	SCPS-3824-08	SCPS-71614-08	SCPS-71620-08	SCPS-1213-08
5/8	SCPS-1420-10	SCPS-1428-10	SCPS-51618-10	SCPS-51624-10	SCPS-3816-10	SCPS-3824-10	SCPS-71614-10	SCPS-71620-10	SCPS-1213-10
3/4	SCPS-1420-12	SCPS-1428-12	SCPS-51618-12	SCPS-51624-12	SCPS-3816-12	SCPS-3824-12	SCPS-71614-12	SCPS-71620-12	SCPS-1213-12
7/8	SCPS-1420-14	-	SCPS-51618-14	-	SCPS-3816-14	-	-	-	SCPS-1213-14
1	SCPS-1420-16	SCPS-1428-16	SCPS-51618-16	SCPS-51624-16	SCPS-3816-16	SCPS-3824-16	SCPS-71614-16	SCPS-71620-16	SCPS-1213-16
1-1/4	SCPS-1420-20	SCPS-1428-20	SCPS-51618-20	SCPS-51624-20	SCPS-3816-20	SCPS-3824-20	SCPS-71614-20	-	SCPS-1213-20
1-1/2	SCPS-1420-24	SCPS-1428-24	SCPS-51618-24	-	SCPS-3816-24	SCPS-3824-24	SCPS-71614-24	-	SCPS-1213-24
1-3/4	SCPS-1420-28	SCPS-1428-28	SCPS-51618-28	-	SCPS-3816-28	-	-	-	SCPS-1213-28
2	SCPS-1420-32	SCPS-1428-32	SCPS-51618-32	-	SCPS-3816-32	-	-	-	SCPS-1213-32

Length	1/2 - 20	5/8 - 11	3/4 - 10	1 - 8
1/2	SCPS-1220-08	SCPS-5811-08	-	-
5/8	SCPS-1220-10	SCPS-5811-10	-	-
3/4	SCPS-1220-12	SCPS-5811-12	SCPS-3410-12	-
1	SCPS-1220-16	SCPS-5811-16	SCPS-3410-16	SCPS-18-16
1-1/4	-	SCPS-5811-20	SCPS-3410-20	SCPS-18-20
1-1/2	-	SCPS-5811-24	SCPS-3410-24	SCPS-18-24
1-3/4	-	SCPS-5811-28	SCPS-3410-28	SCPS-18-28
2	-	SCPS-5811-32	SCPS-3410-32	SCPS-18-32
2-1/2	-	-	-	SCPS-18-40
3	-	-	-	SCPS-18-48

HEX SOCKET SET SCREWS - VARIOUS POINTS
INCH SIZES
MATERIAL: STAINLESS STEEL 18-8 (A2)



HEX SOCKET SET SCREWS – FLAT POINT – STAINLESS STEEL

Length	#4 - 40	#4 - 48	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18	3/8 - 16
1/8	SFPTS-440-02	-	SFPTS-632-02	SFPTS-832-02	-	-	-	-	-	-
3/16	SFPTS-440-03	SFPTS-448-03*	SFPTS-632-03	SFPTS-832-03	SFPTS-1024-03	SFPTS-1032-03	SFPTS-1420-03	-	-	-
1/4	SFPTS-440-04	-	SFPTS-632-04	SFPTS-832-04	SFPTS-1024-04	SFPTS-1032-04	SFPTS-1420-04	SFPTS-1428-04	SFPTS-51618-04	-
5/16	-	-	SFPTS-632-05	SFPTS-832-05	SFPTS-1024-05	SFPTS-1032-05	SFPTS-1420-05	-	SFPTS-51618-05	-
3/8	-	-	SFPTS-632-06	SFPTS-832-06	SFPTS-1024-06	SFPTS-1032-06	SFPTS-1420-06	SFPTS-1428-06	SFPTS-51618-06	SFPTS-3816-06
1/2	-	-	-	SFPTS-832-08	SFPTS-1024-08	SFPTS-1032-08	SFPTS-1420-08	-	SFPTS-51618-08	SFPTS-3816-08
5/8	-	-	-	-	-	-	SFPTS-1420-10	-	SFPTS-51618-10	SFPTS-3816-10
3/4	-	-	-	-	-	-	SFPTS-1420-12	-	SFPTS-51618-12	SFPTS-3816-12
1	-	-	-	-	-	-	SFPTS-1420-16	-	SFPTS-51618-16	SFPTS-3816-16



*Indicates a semi-standard product, usually in stock

HEX SOCKET SET SCREWS – OVAL POINT – STAINLESS STEEL

Length	#4 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	5/16 - 18	3/8 - 16	1/2 - 13
1/8	SOVPS-440-02	SOVPS-632-02	SOVPS-832-02	-	-	-	-	-	-
3/16	SOVPS-440-03	SOVPS-632-03	SOVPS-832-03	SOVPS-1024-03	SOVPS-1032-03	SOVPS-1420-03	-	-	-
1/4	SOVPS-440-04	SOVPS-632-04	SOVPS-832-04	SOVPS-1024-04	SOVPS-1032-04	SOVPS-1420-04	SOVPS-51618-04	-	-
5/16	-	SOVPS-632-05	SOVPS-832-05	SOVPS-1024-05	SOVPS-1032-05	SOVPS-1420-05	SOVPS-51618-05	-	-
3/8	SOVPS-440-06	SOVPS-632-06	SOVPS-832-06	SOVPS-1024-06	SOVPS-1032-06	SOVPS-1420-06	SOVPS-51618-06	SOVPS-3816-06	-
1/2	-	-	-	SOVPS-1024-08	SOVPS-1032-08	SOVPS-1420-08	SOVPS-51618-08	SOVPS-3816-08	-
5/8	-	-	-	-	-	SOVPS-1420-10	-	SOVPS-3816-10	-
3/4	-	-	-	-	-	SOVPS-1420-12	SOVPS-51618-12	SOVPS-3816-12	-
1	-	-	-	-	-	SOVPS-1420-16	SOVPS-51618-16	SOVPS-3816-16	SOVPS-1213-16



Continued on next page . . .

**HEX SOCKET SET SCREWS - VARIOUS POINTS
INCH SIZES
MATERIAL: STAINLESS STEEL 18-8 (A2), Continued**



HEX SOCKET SET SCREWS – CONE POINT – STAINLESS STEEL

Length	#4 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28	5/16 - 18	3/8 - 16
1/8	SCOPS-440-02	SCOPS-632-02	SCOPS-832-02	-	-	-	-	-	-
3/16	SCOPS-440-03	SCOPS-632-03	SCOPS-832-03	SCOPS-1024-03	SCOPS-1032-03	-	-	-	-
1/4	SCOPS-440-04	SCOPS-632-04	SCOPS-832-04	SCOPS-1024-04	SCOPS-1032-04	SCOPS-1420-04	SCOPS-1428-04	-	-
5/16	-	SCOPS-632-05	SCOPS-832-05	SCOPS-1024-05	SCOPS-1032-05	SCOPS-1420-05	-	SCOPS-51618-05	-
3/8	-	SCOPS-632-06	SCOPS-832-06	SCOPS-1024-06	SCOPS-1032-06	SCOPS-1420-06	SCOPS-1428-06	SCOPS-51618-06	SCOPS-3816-06
1/2	-	-	-	SCOPS-1024-08	SCOPS-1032-08	SCOPS-1420-08	-	SCOPS-51618-08	SCOPS-3816-08
5/8	-	-	-	-	-	SCOPS-1420-10	-	-	SCOPS-3816-10
3/4	-	-	-	-	-	SCOPS-1420-12	SCOPS-1428-12	SCOPS-51618-12	SCOPS-3816-12
1	-	-	-	-	-	SCOPS-1420-16	-	SCOPS-51618-16	SCOPS-3816-16
2	-	-	-	-	-	SCOPS-1420-32	-	-	-



HEX SOCKET SET SCREWS – HALF DOG POINT – STAINLESS STEEL

Length	#4 - 40	#6 - 32	#8 - 32	#10 - 24	#10 - 32	1/4 - 20	1/4 - 28
1/8	SHDPS-440-02	SHDPS-632-02	SHDPS-832-02	-	-	-	-
3/16	SHDPS-440-03	SHDPS-632-03	SHDPS-832-03	SHDPS-1024-03	SHDPS-1032-03	-	-
1/4	SHDPS-440-04	SHDPS-632-04	SHDPS-832-04	SHDPS-1024-04	SHDPS-1032-04	SHDPS-1420-04	SHDPS-1428-04
5/16	-	SHDPS-632-05	SHDPS-832-05	SHDPS-1024-05	SHDPS-1032-05	SHDPS-1420-05	-
3/8	-	SHDPS-632-06	SHDPS-832-06	SHDPS-1024-06	SHDPS-1032-06	SHDPS-1420-06	SHDPS-1428-06
1/2	-	-	-	SHDPS-1024-08	SHDPS-1032-08	SHDPS-1420-08	-
5/8	-	-	SHDPS-832-10	-	-	SHDPS-1420-10	-
3/4	-	-	-	-	-	SHDPS-1420-12	-
7/8	-	-	-	-	-	-	-
1	-	-	-	-	-	SHDPS-1420-16	-
1-1/4	-	-	-	-	-	-	-
1-1/2	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-
3	-	-	-	-	-	-	-



Length	5/16 - 18	3/8 - 16	1/2 - 13	1/2 - 20	5/8 - 11	3/4 - 10	7/8 - 9
3/16	-	-	-	-	-	-	-
1/4	-	-	-	-	-	-	-
5/16	SHDPS-51618-05	-	-	-	-	-	-
3/8	SHDPS-51618-06	SHDPS-3816-06	-	-	-	-	-
1/2	SHDPS-51618-08	SHDPS-3816-08	SHDPS-1213-08	SHDPS-1220-08	-	-	-
5/8	-	SHDPS-3816-10	-	-	SHDPS-5811-10*	-	-
3/4	SHDPS-51618-12	SHDPS-3816-12	SHDPS-1213-12	-	-	-	-
7/8	-	-	-	-	-	-	SHDPS-789-14*
1	SHDPS-51618-16	SHDPS-3816-16	SHDPS-1213-16	-	SHDPS-5811-16	-	-
1-1/4	-	SHDPS-3816-20	SHDPS-1213-20	-	SHDPS-5811-20	-	-
1-1/2	-	-	SHDPS-1213-24*	-	SHDPS-5811-24*	-	-
2	-	-	-	-	SHDPS-5811-32*	-	SHDPS-789-32*
3	-	-	-	-	-	-	SHDPS-789-48*

*Indicates a semi-standard product, usually in stock

HEX SOCKET SET SCREWS - VARIOUS POINTS


METRIC SIZES

MATERIAL: ALLOY STEEL



HEX SOCKET

METRIC SIZES: ALLOY STEEL



METRIC SIZES - CUP POINT

ISO 4029

Thread	M2 x .4	M3 x .5	M4 x .7	M5 x .8	M6 x 1	M8 x 1.25	M10 x 1.5	M12 x 1.75	M16 x 2	M20 x 2.5
Length mm										
2.5	SCPM-02-025	-	-	-	-	-	-	-	-	-
3	SCPM-02-03	SCPM-03-03	-	-	-	-	-	-	-	-
4	SCPM-02-04	SCPM-03-04	SCPM-04-04	-	-	-	-	-	-	-
5	SCPM-02-05	SCPM-03-05	SCPM-04-05	SCPM-05-05	-	-	-	-	-	-
6	SCPM-02-06	SCPM-03-06	SCPM-04-06	SCPM-05-06	SCPM-06-06	-	-	-	-	-
8	-	SCPM-03-08	SCPM-04-08	SCPM-05-08	SCPM-06-08	SCPM-08-08	-	-	-	-
10	-	SCPM-03-10	SCPM-04-10	SCPM-05-10	SCPM-06-10	SCPM-08-10	SCPM-10-10	-	-	-
12	-	-	SCPM-04-12	SCPM-05-12	SCPM-06-12	SCPM-08-12	SCPM-10-12	SCPM-12-12	-	-
16	-	-	SCPM-04-16	SCPM-05-16	SCPM-06-16	SCPM-08-16	SCPM-10-16	SCPM-12-16	SCPM-16-16	-
20	-	-	SCPM-04-20	SCPM-05-20	SCPM-06-20	SCPM-08-20	SCPM-10-20	SCPM-12-20	SCPM-16-20	SCPM-20-20
25	-	-	-	SCPM-05-25	SCPM-06-25	SCPM-08-25	SCPM-10-25	SCPM-12-25	SCPM-16-25	SCPM-20-25
30	-	-	-	-	SCPM-06-30	SCPM-08-30	SCPM-10-30	SCPM-12-30	SCPM-16-30	SCPM-20-30
35	-	-	-	-	SCPM-06-35	SCPM-08-35	SCPM-10-35	SCPM-12-35	SCPM-16-35	SCPM-20-35
40	-	-	-	-	SCPM-06-40	SCPM-08-40	SCPM-10-40	SCPM-12-40	SCPM-16-40	SCPM-20-40
45	-	-	-	-	-	SCPM-08-45	SCPM-10-45	SCPM-12-45	SCPM-16-45	SCPM-20-45
50	-	-	-	-	-	SCPM-08-50	SCPM-10-50	SCPM-12-50	SCPM-16-50	SCPM-20-50
55	-	-	-	-	-	-	-	-	SCPM-16-55	SCPM-20-55
60	-	-	-	-	-	-	-	-	SCPM-16-60	SCPM-20-60

PACKAGE QUANTITIES:

Diameter	100	50	25
M3 - 8	All	-	-
M10 & 12	Thru 35	40 & Up	-
M16	-	Thru 50	55 & Up
M20	-	Thru 30	35 & Up
M24	-	-	All



METRIC SIZES – KNURLED CUP POINT ISO 4029

Length	M4 X 0.7	M5 X 0.8	M6 X 1.0	M8 X 1.25
4	SKCUM-04-04	-	-	-
5	SKCUM-04-05	SKCUM-05-05	-	-
6	SKCUM-04-06	SKCUM-05-06	SKCUM-06-06	-
8	SKCUM-04-08	SKCUM-05-08	SKCUM-06-08	SKCUM-08-08
10	SKCUM-04-10	SKCUM-05-10	SKCUM-06-10	SKCUM-08-10
12	-	SKCUM-05-12	SKCUM-06-12	SKCUM-08-12
16	-	SKCUM-05-16	SKCUM-06-16	SKCUM-08-16
20	-	SKCUM-05-20	SKCUM-06-20	SKCUM-08-20
25	-	-	SKCUM-06-25	SKCUM-08-25

HEX SOCKET SET SCREWS

METRIC SIZES


MATERIAL: STAINLESS STEEL 18-8 (A-2)



HEX SOCKET CUP POINT SET SCREWS - STAINLESS STEEL

Length	M2 X .4	M2.5 X .45	M3 X .5	M4 X .7	M5 X .8	M6 X 1.0	M8 X 1.25
2	SCPSM-02-02	-	-	-	-	-	-
3	SCPSM-02-03	SCPSM-025-03	SCPSM-03-03	-	-	-	-
4	SCPSM-02-04	SCPSM-025-04	SCPSM-03-04	SCPSM-04-04	-	-	-
5	SCPSM-02-05	SCPSM-025-05	SCPSM-03-05	SCPSM-04-05	SCPSM-05-05	-	-
6	SCPSM-02-06	SCPSM-025-06	SCPSM-03-06	SCPSM-04-06	SCPSM-05-06	SCPSM-06-06	-
8	SCPSM-02-08	SCPSM-025-08	SCPSM-03-08	SCPSM-04-08	SCPSM-05-08	SCPSM-06-08	SCPSM-08-08
10	SCPSM-02-10	SCPSM-025-10	SCPSM-03-10	SCPSM-04-10	SCPSM-05-10	SCPSM-06-10	SCPSM-08-10
12	-	SCPSM-025-12	SCPSM-03-12	SCPSM-04-12	SCPSM-05-12	SCPSM-06-12	SCPSM-08-12
14	-	-	-	-	-	SCPSM-06-14	SCPSM-08-14
16	-	-	SCPSM-03-16	SCPSM-04-16	SCPSM-05-16	SCPSM-06-16	SCPSM-08-16
18	-	-	SCPSM-03-18	SCPSM-04-18	SCPSM-05-18	SCPSM-06-18	SCPSM-08-18
20	-	-	SCPSM-03-20	SCPSM-04-20	SCPSM-05-20	SCPSM-06-20	SCPSM-08-20
25	-	-	-	SCPSM-04-25	SCPSM-05-25	SCPSM-06-25	SCPSM-08-25
30	-	-	-	SCPSM-04-30	SCPSM-05-30	SCPSM-06-30	SCPSM-08-30
35	-	-	-	-	SCPSM-05-35	SCPSM-06-35	SCPSM-08-35
40	-	-	-	-	SCPSM-05-40	SCPSM-06-40	SCPSM-08-40
45	-	-	-	-	-	SCPSM-06-45	SCPSM-08-45
50	-	-	-	-	-	SCPSM-06-50	SCPSM-08-50
55	-	-	-	-	-	-	SCPSM-08-55
60	-	-	-	-	-	SCPSM-06-60	SCPSM-08-60
70	-	-	-	-	-	-	SCPSM-08-70
80	-	-	-	-	-	-	SCPSM-08-80
90	-	-	-	-	-	-	-
100	-	-	-	-	-	-	-

Length	M10 X 1.5	M12 X 1.75	M14 X 2.0	M16 X 2.0	M20 X 2.5	M24 X 3.0
2	-	-	-	-	-	-
3	-	-	-	-	-	-
4	-	-	-	-	-	-
5	-	-	-	-	-	-
6	-	-	-	-	-	-
8	-	-	-	-	-	-
10	SCPSM-10-10	SCPSM-12-10	-	-	-	-
12	SCPSM-10-12	SCPSM-12-12	-	-	-	-
14	SCPSM-10-14	SCPSM-12-14	-	-	-	-
16	SCPSM-10-16	SCPSM-12-16	-	SCPSM-16-16	-	-
18	SCPSM-10-18	SCPSM-12-18	-	SCPSM-16-18	-	-
20	SCPSM-10-20	SCPSM-12-20	SCPSM-14-20	SCPSM-16-20	SCPSM-20-20	-
25	SCPSM-10-25	SCPSM-12-25	-	SCPSM-16-25	SCPSM-20-25	SCPSM-24-25
30	SCPSM-10-30	SCPSM-12-30	SCPSM-14-30	SCPSM-16-30	SCPSM-20-30	SCPSM-24-30
35	SCPSM-10-35	SCPSM-12-35	-	SCPSM-16-35	SCPSM-20-35	SCPSM-24-35
40	SCPSM-10-40	SCPSM-12-40	SCPSM-14-40	SCPSM-16-40	SCPSM-20-40	SCPSM-24-40
45	SCPSM-10-45	SCPSM-12-45	-	SCPSM-16-45	SCPSM-20-45	SCPSM-24-45
50	SCPSM-10-50	SCPSM-12-50	SCPSM-14-50	SCPSM-16-50	SCPSM-20-50	SCPSM-24-50
55	SCPSM-10-55	SCPSM-12-55	-	SCPSM-16-55	-	-
60	SCPSM-10-60	SCPSM-12-60	-	SCPSM-16-60	SCPSM-20-60	SCPSM-24-60
70	SCPSM-10-70	SCPSM-12-70	-	SCPSM-16-70	SCPSM-20-70	SCPSM-24-70
80	SCPSM-10-80	SCPSM-12-80	-	SCPSM-16-80	SCPSM-20-80	SCPSM-24-80
90	SCPSM-10-90	SCPSM-12-90	-	SCPSM-16-90	SCPSM-20-90	SCPSM-24-90
100	SCPSM-10-100	SCPSM-12-100	-	SCPSM-16-100	SCPSM-20-100	SCPSM-24-100

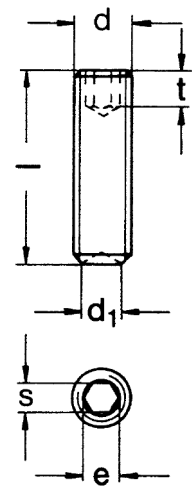

HEX SOCKET SET SCREWS - VARIOUS POINTS
METRIC SIZES
MATERIAL: STAINLESS STEEL 18-8 (A-2)



HEX SOCKET SET SCREWS - FLAT POINT

ISO 4026/DIN 913

Length	M2 X .4	M2.5 X .45	M3 X .5	M4 X .7	M5 X .8	M6 X 1.0	M8 X 1.25
2	SFPTSM-02-02	-	-	-	-	-	-
3	SFPTSM-02-03	SFPTSM-025-03	SFPTSM-03-03	-	-	-	-
4	SFPTSM-02-04	SFPTSM-025-04	SFPTSM-03-04	SFPTSM-04-04	-	-	-
5	SFPTSM-02-05	SFPTSM-025-05	SFPTSM-03-05	SFPTSM-04-05	SFPTSM-05-05	-	-
6	SFPTSM-02-06	SFPTSM-025-06	SFPTSM-03-06	SFPTSM-04-06	SFPTSM-05-06	SFPTSM-06-06	-
8	SFPTSM-02-08	SFPTSM-025-08	SFPTSM-03-08	SFPTSM-04-08	SFPTSM-05-08	SFPTSM-06-08	SFPTSM-08-08
10	SFPTSM-02-10	SFPTSM-025-10	SFPTSM-03-10	SFPTSM-04-10	SFPTSM-05-10	SFPTSM-06-10	SFPTSM-08-10
12	-	SFPTSM-025-12	SFPTSM-03-12	SFPTSM-04-12	SFPTSM-05-12	SFPTSM-06-12	SFPTSM-08-12
16	-	-	SFPTSM-03-16	SFPTSM-04-16	SFPTSM-05-16	SFPTSM-06-16	SFPTSM-08-16
18	-	-	SFPTSM-03-18	SFPTSM-04-18	SFPTSM-05-18	SFPTSM-06-18	SFPTSM-08-18
20	-	-	SFPTSM-03-20	SFPTSM-04-20	SFPTSM-05-20	SFPTSM-06-20	SFPTSM-08-20
25	-	-	-	SFPTSM-04-25	SFPTSM-05-25	SFPTSM-06-25	SFPTSM-08-25
30	-	-	-	SFPTSM-04-30	SFPTSM-05-30	SFPTSM-06-30	SFPTSM-08-30
35	-	-	-	SFPTSM-04-35	SFPTSM-05-35	SFPTSM-06-35	SFPTSM-08-35
40	-	-	-	SFPTSM-04-40	SFPTSM-05-40	SFPTSM-06-40	SFPTSM-08-40
45	-	-	-	-	-	SFPTSM-06-45	SFPTSM-08-45
50	-	-	-	-	-	SFPTSM-06-50	SFPTSM-08-50
55	-	-	-	-	-	-	SFPTSM-08-55
60	-	-	-	-	-	SFPTSM-06-60	SFPTSM-08-60
70	-	-	-	-	-	-	SFPTSM-08-70
80	-	-	-	-	-	-	SFPTSM-08-80
90	-	-	-	-	-	-	-
100	-	-	-	-	-	-	-

Length	M10 X 1.5	M12 X 1.75	M14 X 2.0	M16 X 2.0	M20 X 2.5	M24 X 3.0
2	-	-	-	-	-	-
3	-	-	-	-	-	-
4	-	-	-	-	-	-
5	-	-	-	-	-	-
6	-	-	-	-	-	-
8	-	-	-	-	-	-
10	SFPTSM-10-10	-	-	-	-	-
12	SFPTSM-10-12	SFPTSM-12-12	-	-	-	-
16	SFPTSM-10-16	SFPTSM-12-16	-	SFPTSM-16-16	-	-
18	SFPTSM-10-18	SFPTSM-12-18	-	SFPTSM-16-18	-	-
20	SFPTSM-10-20	SFPTSM-12-20	SFPTSM-12-20	SFPTSM-16-20	SFPTSM-20-20	-
25	SFPTSM-10-25	SFPTSM-12-25	-	SFPTSM-16-25	SFPTSM-20-25	SFPTSM-24-25
30	SFPTSM-10-30	SFPTSM-12-30	SFPTSM-12-30	SFPTSM-16-30	SFPTSM-20-30	SFPTSM-24-30
35	SFPTSM-10-35	SFPTSM-12-35	-	SFPTSM-16-35	SFPTSM-20-35	SFPTSM-24-35
40	SFPTSM-10-40	SFPTSM-12-40	SFPTSM-12-40	SFPTSM-16-40	SFPTSM-20-40	SFPTSM-24-40
45	SFPTSM-10-45	SFPTSM-12-45	-	SFPTSM-16-45	SFPTSM-20-45	SFPTSM-24-45
50	SFPTSM-10-50	SFPTSM-12-50	SFPTSM-12-50	SFPTSM-16-50	SFPTSM-20-50	SFPTSM-24-50
55	SFPTSM-10-55	SFPTSM-12-55	-	SFPTSM-16-55	-	-
60	SFPTSM-10-60	SFPTSM-12-60	-	SFPTSM-16-60	SFPTSM-20-60	SFPTSM-24-60
70	SFPTSM-10-70	SFPTSM-12-70	-	SFPTSM-16-70	SFPTSM-20-70	SFPTSM-24-70
80	SFPTSM-10-80	SFPTSM-12-80	-	SFPTSM-16-80	SFPTSM-20-80	SFPTSM-24-80
90	SFPTSM-10-90	SFPTSM-12-90	-	SFPTSM-16-90	SFPTSM-20-90	SFPTSM-24-90
100	SFPTSM-10-100	SFPTSM-12-100	-	SFPTSM-16-100	SFPTSM-20-100	SFPTSM-24-100

FLAT



HEX SOCKET SET SCREWS - VARIOUS POINTS
METRIC SIZES
MATERIAL: STAINLESS STEEL 18-8 (A-2)



HEX SOCKET SET SCREWS - CONE POINT

ISO 4027/DIN 914

Length	M3 X .5	M4 X .7	M5 X .8	M6 X 1.0	M8 X 1.25	M10 X 1.5	M12 X 1.75	M16 X 2.0	M20 X 2.5
3	SCOPSM-03-03	-	-	-	-	-	-	-	-
4	SCOPSM-03-04	SCOPSM-04-04	-	-	-	-	-	-	-
5	SCOPSM-03-05	SCOPSM-04-05	SCOPSM-05-05	-	-	-	-	-	-
6	SCOPSM-03-06	SCOPSM-04-06	SCOPSM-05-06	SCOPSM-06-06	-	-	-	-	-
8	SCOPSM-03-08	SCOPSM-04-08	SCOPSM-05-08	SCOPSM-06-08	SCOPSM-08-08	-	-	-	-
10	SCOPSM-03-10	SCOPSM-04-10	SCOPSM-05-10	SCOPSM-06-10	SCOPSM-08-10	SCOPSM-10-10	-	-	-
12	SCOPSM-03-12	SCOPSM-04-12	SCOPSM-05-12	SCOPSM-06-12	SCOPSM-08-12	SCOPSM-10-12	SCOPSM-12-12	-	-
16	SCOPSM-03-16	SCOPSM-04-16	SCOPSM-05-16	SCOPSM-06-16	SCOPSM-08-16	SCOPSM-10-16	SCOPSM-12-16	SCOPSM-16-16	-
18	SCOPSM-03-18	SCOPSM-04-18	SCOPSM-05-18	SCOPSM-06-18	SCOPSM-08-18	SCOPSM-10-18	SCOPSM-12-18	-	-
20	SCOPSM-03-20	SCOPSM-04-20	SCOPSM-05-20	SCOPSM-06-20	SCOPSM-08-20	SCOPSM-10-20	SCOPSM-12-20	SCOPSM-16-20	SCOPSM-20-20
25	-	SCOPSM-04-25	SCOPSM-05-25	SCOPSM-06-25	SCOPSM-08-25	SCOPSM-10-25	SCOPSM-12-25	SCOPSM-16-25	SCOPSM-20-25
30	-	SCOPSM-04-30	SCOPSM-05-30	SCOPSM-06-30	SCOPSM-08-30	SCOPSM-10-30	SCOPSM-12-30	SCOPSM-16-30	SCOPSM-20-30
35	-	SCOPSM-04-35	SCOPSM-05-35	SCOPSM-06-35	SCOPSM-08-35	SCOPSM-10-35	SCOPSM-12-35	SCOPSM-16-35	SCOPSM-20-35
40	-	SCOPSM-04-40	SCOPSM-05-40	SCOPSM-06-40	SCOPSM-08-40	SCOPSM-10-40	SCOPSM-12-40	SCOPSM-16-40	SCOPSM-20-40
45	-	-	-	SCOPSM-06-45	SCOPSM-08-45	SCOPSM-10-45	SCOPSM-12-45	SCOPSM-16-45	SCOPSM-20-45
50	-	-	-	SCOPSM-06-50	SCOPSM-08-50	SCOPSM-10-50	SCOPSM-12-50	SCOPSM-16-50	SCOPSM-20-50
55	-	-	-	-	SCOPSM-08-55	SCOPSM-10-55	SCOPSM-12-55	-	-
60	-	-	-	SCOPSM-06-60	SCOPSM-08-60	SCOPSM-10-60	SCOPSM-12-60	SCOPSM-16-60	SCOPSM-20-60
70	-	-	-	-	SCOPSM-08-70	SCOPSM-10-70	SCOPSM-12-70	SCOPSM-16-70	SCOPSM-20-70
80	-	-	-	-	SCOPSM-08-80	SCOPSM-10-80	SCOPSM-12-80	SCOPSM-16-80	SCOPSM-20-80
90	-	-	-	-	-	-	-	SCOPSM-16-90	SCOPSM-20-90



HEX SOCKET SET SCREWS - FULL DOG POINT

ISO 4028/DIN 915


Length	M3 X .5	M4 X .7	M5 X .8	M6 X 1.0	M8 X 1.25	M10 X 1.5	M12 X 1.75	M16 X 2.0	M20 X 2.5	M24 X 3.0
3	SFDPSM-03-03	-	-	-	-	-	-	-	-	-
4	SFDPSM-03-04	SFDPSM-04-04	-	-	-	-	-	-	-	-
5	SFDPSM-03-05	SFDPSM-04-05	SFDPSM-05-05	-	-	-	-	-	-	-
6	SFDPSM-03-06	SFDPSM-04-06	SFDPSM-05-06	SFDPSM-06-06	-	-	-	-	-	-
8	SFDPSM-03-08	SFDPSM-04-08	SFDPSM-05-08	SFDPSM-06-08	SFDPSM-08-08	-	-	-	-	-
10	SFDPSM-03-10	SFDPSM-04-10	SFDPSM-05-10	SFDPSM-06-10	SFDPSM-08-10	SFDPSM-10-10	-	-	-	-
12	SFDPSM-03-12	SFDPSM-04-12	SFDPSM-05-12	SFDPSM-06-12	SFDPSM-08-12	SFDPSM-10-12	SFDPSM-12-12	-	-	-
16	SFDPSM-03-16	SFDPSM-04-16	SFDPSM-05-16	SFDPSM-06-16	SFDPSM-08-16	SFDPSM-10-16	SFDPSM-12-16	SFDPSM-16-16	-	-
18	SFDPSM-03-18	SFDPSM-04-18	SFDPSM-05-18	SFDPSM-06-18	SFDPSM-08-18	SFDPSM-10-18	SFDPSM-12-18	-	-	-
20	SFDPSM-03-20	SFDPSM-04-20	SFDPSM-05-20	SFDPSM-06-20	SFDPSM-08-20	SFDPSM-10-20	SFDPSM-12-20	SFDPSM-16-20	SFDPSM-20-20	-
25	-	SFDPSM-04-25	SFDPSM-05-25	SFDPSM-06-25	SFDPSM-08-25	SFDPSM-10-25	SFDPSM-12-25	SFDPSM-16-25	SFDPSM-20-25	SFDPSM-24-25
30	-	SFDPSM-04-30	SFDPSM-05-30	SFDPSM-06-30	SFDPSM-08-30	SFDPSM-10-30	SFDPSM-12-30	SFDPSM-16-30	SFDPSM-20-30	SFDPSM-24-30
35	-	-	SFDPSM-05-35	SFDPSM-06-35	SFDPSM-08-35	SFDPSM-10-35	SFDPSM-12-35	SFDPSM-16-35	SFDPSM-20-35	SFDPSM-24-35
40	-	-	SFDPSM-05-40	SFDPSM-06-40	SFDPSM-08-40	SFDPSM-10-40	SFDPSM-12-40	SFDPSM-16-40	SFDPSM-20-40	SFDPSM-24-40
45	-	-	-	SFDPSM-06-45	SFDPSM-08-45	SFDPSM-10-45	SFDPSM-12-45	SFDPSM-16-45	SFDPSM-20-45	SFDPSM-24-45
50	-	-	-	SFDPSM-06-50	SFDPSM-08-50	SFDPSM-10-50	SFDPSM-12-50	SFDPSM-16-50	SFDPSM-20-50	SFDPSM-24-50
55	-	-	-	-	SFDPSM-08-55	SFDPSM-10-55	SFDPSM-12-55	-	-	-
60	-	-	-	SFDPSM-06-60	SFDPSM-08-60	SFDPSM-10-60	SFDPSM-12-60	SFDPSM-16-60	SFDPSM-20-60	SFDPSM-24-60
70	-	-	-	-	SFDPSM-08-70	SFDPSM-10-70	SFDPSM-12-70	SFDPSM-16-70	SFDPSM-20-70	SFDPSM-24-70
80	-	-	-	-	SFDPSM-08-80	SFDPSM-10-80	SFDPSM-12-80	SFDPSM-16-80	SFDPSM-20-80	SFDPSM-24-80
90	-	-	-	-	-	-	-	-	-	SFDPSM-24-90
100	-	-	-	-	-	-	-	-	-	SFDPSM-24-100

HEX SOCKET SHOULDER SCREWS - PRECISION 1 INCH SIZES - SHOULDER TOLERANCE +.0000" - .0010" MATERIAL - HIGH GRADE ALLOY STEEL, BLACK OXIDE FINISH



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are Unified standard Class 3A, NRC Series. Thread length tolerance shall be $-.020"$ for up to $3/8"$ inclusive, and $-.030"$ for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45° , and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular "stripper bolts", and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

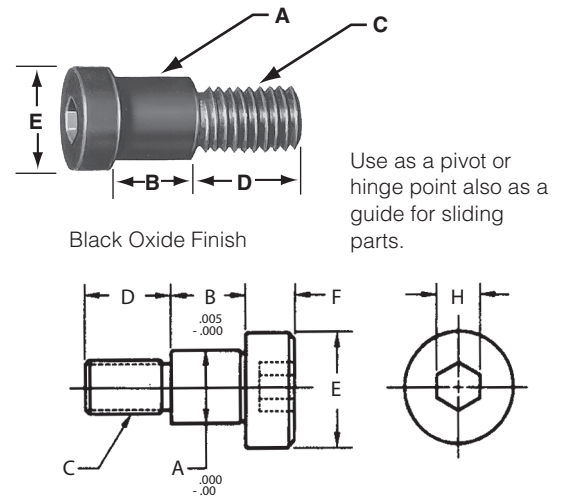

Code		A Shoulder Diameter	B Shoulder Length	C Thread	D Thread Length	E Head Diameter	F Head Height	H Hex Socket
<i>Harcourt</i>	Other Refs.							
SS-04-04	CL-5-SS		1/4					
SS-04-05	-		5/16					
SS-04-06	CL-12-SS		3/8					
SS-04-08	CL-13-SS	1/4 .2500	1/2	10 - 24	3/16	3/8	3/8	1/8
SS-04-10	CL-37-SS		5/8					
SS-04-12	CL-15-SS		3/4					
SS-04-14	-		7/8					
SS-04-16	CL-16-SS		1					
SS-05-04	CL-1-SS		1/4					
SS-05-05	CL-6-SS		5/16					
SS-05-06	CL-11-SS		3/8					
SS-05-08	CL-20-SS	5/16 .3125	1/2	1/4 - 20	7/32	7/16	7/16	5/32
SS-05-10	CL-21-SS		5/8					
SS-05-12	CL-7-SS		3/4					
SS-05-16	CL-8-SS		1					
SS-06-04	CL-24-SS		1/4					
SS-06-05	-		5/16					
SS-06-06	CL-2-SS		3/8					
SS-06-08	CL-14-SS	3/8 .3750	1/2	5/16	1/4	1/2	9/16	3/16
SS-06-10	CL-9-SS		5/8					
SS-06-12	CL-10-SS		3/4					
SS-06-14	-		7/8					
SS-06-16	-		1					
SS-08-05	-		5/16					
SS-08-06	CL-3-SS		3/8					
SS-08-08	CL-4-SS		1/2					
SS-08-10	CL-31-SS	1/2 .5000	5/8	3/8 - 16	5/16	5/8	3/4	1/4
SS-08-12	CL-32-SS		3/4					
SS-08-14	-		7/8					
SS-08-16	-		1					
SS-10-08	CL-33-SS		1/2					
SS-10-10	CL-34-SS		5/8					
SS-10-12	CL-35-SS	5/8 .6250	3/4	1/2 - 13	3/8	3/4	7/8	5/16
SS-10-14	-		7/8					
SS-10-16	CL-36-SS		1					
SS-12-08	CL-38-SS		1/2					
SS-12-10	-		5/8					
SS-12-12	CL-39-SS	3/4 .7500	3/4	5/8 - 11	1/2	7/8	1	3/8
SS-12-14	-		7/8					
SS-12-16	CL-40-SS		1					
SS-12-20	-		1-1/4					

HEX SOCKET SHOULDER SCREWS - PRECISION 1


METRIC SIZES - SHOULDER TOLERANCE +0.000 - 0.025mm

MATERIAL - GRADE 12.9 ALLOY STEEL, BLACK OXIDE FINISH



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are ISO Class 4g6g. Thread length tolerance shall be -0.050mm for up to 10mm inclusive, and -0.75mm for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45°, and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular "stripper bolts", and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

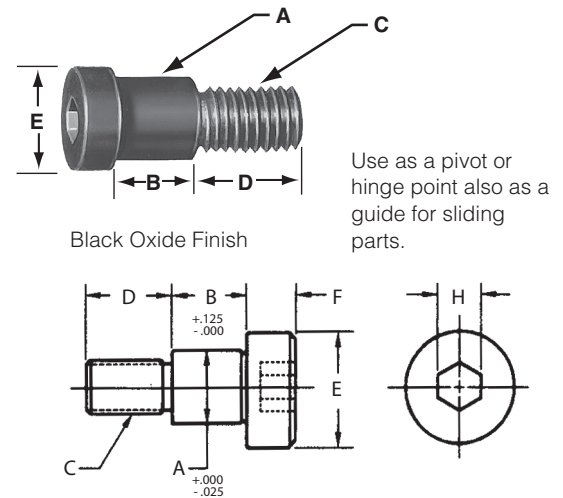

Code		A Shoulder Diameter	B Shoulder Length	C Thread	D Thread Length	E Head Diameter	F Head Height	H Hex Socket
<i>Harcourt</i>	Other Refs.							
SSM-06-10	-		10mm					
SSM-06-12	-		12mm					
SSM-06-16	-		16mm					
SSM-06-20	-	6mm	20mm	M5 x 0.8	9.5	9.5	4.8	3mm
SSM-06-25	-		25mm					
SSM-06-30	-		30mm					
SSM-08-06	CLM-806-SS		6mm					
SSM-08-08	CLM-808-SS		8mm					
SSM-08-10	CLM-810-SS		10mm					
SSM-08-12	CLM-812-SS		12mm					
SSM-08-16	CLM-816-SS	8mm	16mm	M6 x 1.0	11.2	13.0	5.6	4mm
SSM-08-20	CLM-820-SS		20mm					
SSM-08-25	-		25mm					
SSM-08-30	-		30mm					
SSM-08-40	-		40mm					
SSM-10-06	CLM-1006-SS		6mm					
SSM-10-08	CLM-1008-SS		8mm					
SSM-10-10	CLM-1010-SS		10mm					
SSM-10-12	CLM-1012-SS		12mm					
SSM-10-16	CLM-1016-SS		16mm					
SSM-10-20	CLM-1020-SS		20mm					
SSM-10-25	-		25mm					
SSM-10-30	-	10mm	30mm	M8 x 1.25	13.2	16.0	7.1	5mm
SSM-10-40	-		40mm					
SSM-10-50	-		50mm					
SSM-10-60	-		60mm					
SSM-10-70	-		70mm					
SSM-10-80	-		80mm					
SSM-12-16	-		16mm					
SSM-12-20	-		20mm					
SSM-12-25	-		25mm					
SSM-12-30	-		30mm					
SSM-12-40	-	12mm	40mm	M10 x 1.5	15.9	19.1	7.9	6mm
SSM-12-50	-		50mm					
SSM-12-60	-		60mm					
SSM-12-70	-		70mm					


Continued on next page . . .

HEX SOCKET SHOULDER SCREWS - PRECISION 1
METRIC SIZES - SHOULDER TOLERANCE +0.000 - 0.025mm
MATERIAL - GRADE 12.9 ALLOY STEEL, BLACK OXIDE FINISH, Cont.



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are ISO Class 4g6g. Thread length tolerance shall be -0.050mm for up to 10mm inclusive, and -0.75mm for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45°, and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular “stripper bolts”, and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

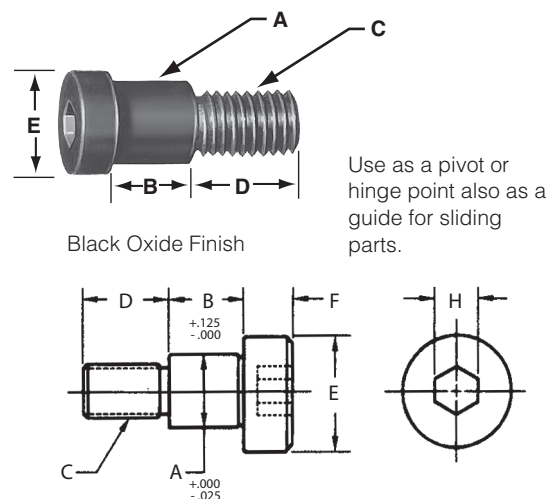

Code		A Shoulder Diameter	B Shoulder Length	C Thread	D Thread Length	E Head Diameter	F Head Height	H Hex Socket
<i>Harcourt</i>	Other Refs.							
SSM-13-10	CLM-1310-SS		10mm					
SSM-13-12	CLM-1312-SS		12mm					
SSM-13-16	CLM-1316-SS	13mm	16mm	M10 x 1.5	16.5	18.0	8.9	6mm
SSM-13-20	CLM-1320-SS		20mm					
SSM-16-10	CLM-1610-SS		10mm					
SSM-16-12	CLM-1612-SS		12mm					
SSM-16-16	CLM-1616-SS		16mm					
SSM-16-20	CLM-1620-SS		20mm					
SSM-16-30	-	16mm	30mm	M12 x 1.75	18.3	24.0	10.9	8mm
SSM-16-50	-		50mm					
SSM-16-70	-		70mm					
SSM-16-90	-		90mm					
SSM-20-16	CLM-2016-SS		16mm					
SSM-20-20	CLM-2020-SS	20mm	20mm	M16 x 2.0	22.4	30.0	14.9	10mm
SSM-20-25	CLM-2025-SS		25mm					


HEX SOCKET SHOULDER SCREWS - PRECISION 2 INCH SIZES - SHOULDER TOLERANCE -.002" - .004" MATERIAL - HIGH GRADE ALLOY STEEL



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are Unified standard Class 3A, UNRC Series. Thread length tolerance shall be -.020" for up to 3/8" inclusive, and -.030" for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45°, and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular "stripper bolts", and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

Dimensions: See next page.

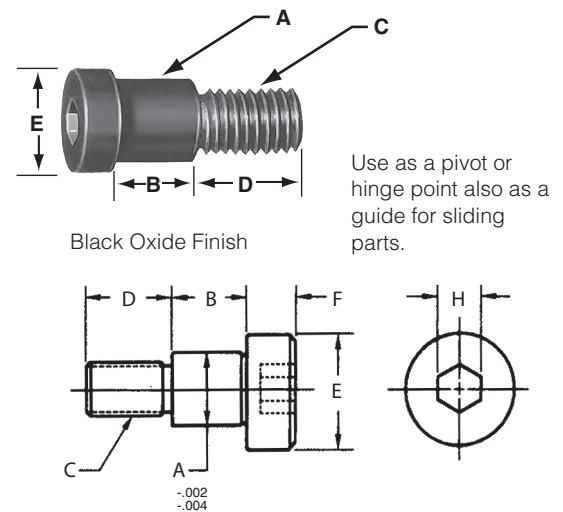

HEX SOCKET SHOULDER SCREWS - INCH SIZES

Shoulder A Diameter B Length	A 1/4"		A 5/16"		A 3/8"		A 1/2"	
	<i>Harcourt</i>	Other Refs.†	<i>Harcourt</i>	Other Refs.†	<i>Harcourt</i>	Other Refs.†	<i>Harcourt</i>	Other Refs.†
1/4	SS2-14-04*	CL-5-SS	SS2-516-04*	CL-1-SS	SS2-38-04	CL-24-SS	-	-
5/16	-	-	SS2-516-05	CL-6-SS	-	-	-	-
3/8	SS2-14-06	CL-12-SS	SS2-516-06	CL-11-SS	SS2-38-06	CL-2-SS	SS2-12-06	CL-3-SS
1/2	SS2-14-08	CL-13-SS	SS2-516-08	CL-20-SS	SS2-38-08	CL-14-SS	SS2-12-08	CL-4-SS
5/8	SS2-14-10	CL-37-SS	SS2-516-10	CL-21-SS	SS2-38-10	CL-9-SS	SS2-12-10	CL-31-SS
3/4	SS2-14-12	CL-15-SS	SS2-516-12	CL-7-SS	SS2-38-12	CL-10-SS	SS2-12-12	CL-32-SS
1	SS2-14-16	CL-16-SS	SS2-516-16	CL-8-SS	SS2-38-16	-	SS2-12-16	-
1-1/4	SS2-14-20	-	SS2-516-20	-	SS2-38-20	-	SS2-12-20	-
1-1/2	SS2-14-24	-	SS2-516-24	-	SS2-38-24	-	SS2-12-24	-
1-3/4	SS2-14-28*	-	SS2-516-28	-	SS2-38-28	-	SS2-12-28	-
2	SS2-14-32*	-	SS2-516-32	-	SS2-38-32	-	SS2-12-32	-
2-1/4	SS2-14-36*	-	SS2-516-36*	-	SS2-38-36	-	SS2-12-36	-
2-1/2	SS2-14-40*	-	SS2-516-40*	-	SS2-38-40	-	SS2-12-40	-
2-3/4	-	-	SS2-516-44*	-	SS2-38-44	-	SS2-12-44	-
3	SS2-14-48*	-	SS2-516-48*	-	SS2-38-48	-	SS2-12-48	-
3-1/4	-	-	-	-	SS2-38-52	-	SS2-12-52	-
3-1/2	-	-	-	-	SS2-38-56	-	SS2-12-56	-
4	-	-	-	-	SS2-38-64	-	SS2-12-64	-
4-1/2	-	-	-	-	SS2-38-72*	-	SS2-12-72	-
5	-	-	-	-	SS2-38-80*	-	SS2-12-80	-
5-1/2	-	-	-	-	-	-	SS2-12-88*	-
6	-	-	-	-	SS2-38-96*	-	SS2-12-96*	-
6-1/2	-	-	-	-	-	-	-	-
7	-	-	-	-	-	-	-	-
7-1/2	-	-	-	-	-	-	-	-
8	-	-	-	-	-	-	-	-

*Indicates a semi-standard product, usually in stock

† "Other Refs." are equivalent dimensions, but these have lower tolerance on shoulder diameters

Continued on next page . . .

**HEX SOCKET SHOULDER SCREWS - PRECISION 2
INCH SIZES - SHOULDER TOLERANCE -.002" - .004"
MATERIAL - HIGH GRADE ALLOY STEEL, Continued**




HEX SOCKET SHOULDER SCREWS - INCH SIZES, Cont.

Shoulder A Diameter B Length	A 5/8"		A 3/4"		A 1"	
	<i>Harcourt</i>	Other Refs.†	<i>Harcourt</i>	Other Refs.†	<i>Harcourt</i>	Other Refs.†
1/4	-	-	-	-	-	-
5/16	-	-	-	-	-	-
3/8	-	-	-	-	-	-
1/2	SS2-58-08*	CL-33-SS	SS2-34-08*	CL-38-SS	-	-
5/8	SS2-58-10*	CL-34-SS	-	-	-	-
3/4	SS2-58-12*	CL-35-SS	SS2-34-12*	CL-39-SS	-	-
1	SS2-58-16*	CL-36-SS	SS2-34-16*	CL-40-SS	SS2-1-16*	-
1-1/4	SS2-58-20	-	SS2-34-20*	-	SS2-1-20*	-
1-1/2	SS2-58-24	-	SS2-34-24	-	SS2-1-24*	-
1-3/4	SS2-58-28	-	SS2-34-28	-	SS2-1-28*	-
2	SS2-58-32	-	SS2-34-32	-	SS2-1-32*	-
2-1/4	SS2-58-36	-	SS2-34-36	-	SS2-1-36*	-
2-1/2	SS2-58-40	-	SS2-34-40	-	SS2-1-40*	-
2-3/4	SS2-58-44	-	SS2-34-44	-	SS2-1-44*	-
3	SS2-58-48	-	SS2-34-48	-	SS2-1-48*	-
3-1/4	SS2-58-52	-	-	-	SS2-1-52*	-
3-1/2	SS2-58-56	-	SS2-34-56	-	SS2-1-56*	-
4	SS2-58-64	-	SS2-34-64	-	SS2-1-64*	-
4-1/2	SS2-58-72	-	SS2-34-72	-	SS2-1-72*	-
5	SS2-58-80	-	SS2-34-80	-	SS2-1-80*	-
5-1/2	SS2-58-88	-	SS2-34-88	-	SS2-1-88*	-
6	SS2-58-96	-	SS2-34-96	-	SS2-1-96*	-
6-1/2	-	-	SS2-34-104*	-	-	-
7	-	-	SS2-34-112*	-	-	-
7-1/2	-	-	SS2-34-120*	-	-	-
8	-	-	SS2-34-128*	-	-	-



*Indicates a semi-standard product, usually in stock

† "Other Refs." are equivalent dimensions, but with lower tolerance on shoulder diameters

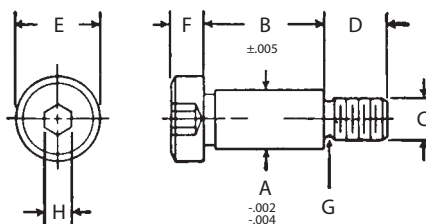

DIMENSIONS:

A, Nominal Size or Basic Shoulder Diameter -.002/- .004	B	C		D	E		F		G	H	
	Shoulder Length	Nominal Thread Size or Basic Thread Diameter	Threads Per Inch	Thread Length	Head Diameter		Head Height		Thread Neck Width	Hexagon Socket Size	
				Basic	Max.	Min.	Max.	Min.	Max.	Min.	
1/4 .2500		10 0.1900	24	0.375	0.375	0.357	0.188	0.177	0.083	1/8	0.125
5/16 .3125		1/4 0.2500	20	0.438	0.438	0.419	0.219	0.209	0.100	5/32	0.156
3/8 .3750	See	5/16 0.3125	18	0.500	0.562	0.543	0.250	0.240	0.111	3/16	0.188
1/2 .5000	Above	3/8 0.3750	16	0.625	0.750	0.729	0.312	0.302	0.125	1/4	0.250
5/8 .6250	Tables	1/2 0.5000	13	0.750	0.875	0.853	0.375	0.365	0.154	5/16	0.312
3/4 .7500		5/8 0.6250	11	0.875	1.000	0.977	0.500	0.490	0.182	3/8	0.375
1 1.0000		3/4 0.7500	10	1.000	1.312	1.287	0.625	0.610	0.200	1/2	0.500

QUANTITY PER PACKAGE:

Through 1/2 X 4	.25	5/8 X 1-1/4 Through 5/8X 3-1/2	25
1/2 x 4-1/2 Through 1/2 x 5	10	5/8 X 4 Through 3/4 x 6	25

HEX SOCKET SHOULDER SCREWS - PRECISION 2

METRIC SIZES - SHOULDER TOLERANCE -0.05 - -0.10mm


MATERIAL - GRADE 12.9 ALLOY STEEL, BLACK OXIDE FINISH

ISO 4029



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are ISO Class 4g6g. Thread length tolerance shall be -0.050mm for up to 10mm inclusive, and -0.75mm for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45°, and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular "stripper bolts", and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

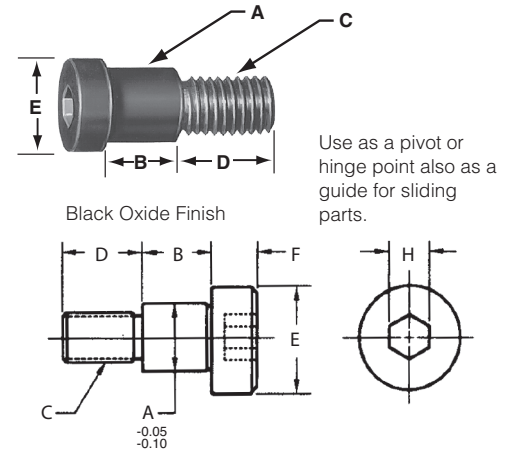

Code		A Shoulder Diameter	B Shoulder Length	C Thread	D Thread Length	E Head Diameter	F Head Height	H Hex Socket
<i>Harcourt</i>	Other Refs.†							
SS2M-06-10	-		10mm					
SS2M-06-12	-		12mm					
SS2M-06-16	-		16mm					
SS2M-06-20	-	6mm	20mm	M5 x 0.8	9.5	9.5	4.8	5mm
SS2M-06-25	-		25mm					
SS2M-06-30	-		30mm					
SS2M-06-40	-		40mm					
SS2M-06-50	-		50mm					
SS2M-08-06	CLM-806-SS		6mm					
SS2M-08-08	CLM-808-SS		8mm					
SS2M-08-10	CLM-810-SS		10mm					
SS2M-08-12	CLM-812-SS		12mm					
SS2M-08-16	CLM-816-SS		16mm					
SS2M-08-20	CLM-820-SS	8mm	20mm	M6 x 1.0	11.2	13.0	5.6	6mm
SS2M-08-25	-		25mm					
SS2M-08-30	-		30mm					
SS2M-08-40	-		40mm					
SS2M-08-50	-		50mm					
SS2M-08-60	-		60mm					
SS2M-08-70	-		70mm					
SS2M-10-06	CLM-1006-SS		6mm					
SS2M-10-08	CLM-1008-SS		8mm					
SS2M-10-10	CLM-1010-SS		10mm					
SS2M-10-12	CLM-1012-SS		12mm					
SS2M-10-16	CLM-1016-SS		16mm					
SS2M-10-20	CLM-1020-SS		20mm					
SS2M-10-25	-	10mm	25mm	M8 x 1.25	13.2	16.0	7.1	8mm
SS2M-10-30	-		30mm					
SS2M-10-40	-		40mm					
SS2M-10-50	-		50mm					
SS2M-10-60	-		60mm					
SS2M-10-70	-		70mm					
SS2M-10-80	-		80mm					
SS2M-12-16	-		16mm					
SS2M-12-20	-		20mm					
SS2M-12-25	-		25mm					
SS2M-12-30	-		30mm					
SS2M-12-40	-		40mm					
SS2M-12-50	-	12mm	50mm	M10 x 1.5	15.9	19.1	7.9	10mm
SS2M-12-60	-		60mm					
SS2M-12-70	-		70mm					
SS2M-12-80	-		80mm					
SS2M-12-90	-		90mm					
SS2M-12-100	-		100mm					

† "Other Refs." are equivalent dimensions, but these have lower tolerance on shoulder diameters

Continued on next page . . .

HEX SOCKET SHOULDER SCREWS - PRECISION 2

METRIC SIZES - SHOULDER TOLERANCE -0.05 - -0.10mm


MATERIAL - GRADE 12.9 ALLOY STEEL, BLACK OXIDE FINISH, Cont.

ISO 4029



Specifications: Hardened by quenching in oil from the hardening temperature and tempered to Rockwell C 32-43 at the surface. Threads are ISO Class 4g6g. Thread length tolerance shall be -0.050mm for up to 10mm inclusive, and -0.75mm for larger. The Shoulder is the enlarged unthreaded portion of the screw, and gives the nominal size dimension. The head may be either plain or knurled, at our option. The head is chamfered between 30° to 45°, and the edge may be slightly rounded.

These precision ground shoulder screws provide a better bearing action than regular “stripper bolts”, and are used as pivoting points for Swing C-Washers, Clamp Straps, Rod Ends, Swing Bolts, Cam Handles, etc., and as retaining bolts for Slip Fit Bushings.

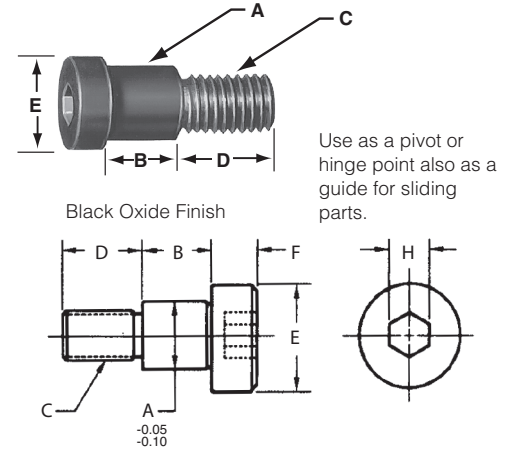


Code		A Shoulder Diameter	B Shoulder Length	C Thread	D Thread Length	E Head Diameter	F Head Height	H Hex Socket
<i>Harcourt</i>	Other Refs.†							
SS2M-13-10	CLM-1310-SS		10mm					
SS2M-13-12	CLM-1312-SS	13mm	12mm	M10 x 1.5	16.5	18.0	8.9	10mm
SS2M-13-16	CLM-1316-SS		16mm					
SS2M-13-20	CLM-1320-SS		20mm					
SS2M-16-10	CLM-1610-SS		10mm					
SS2M-16-12	CLM-1612-SS		12mm					
SS2M-16-16	CLM-1616-SS		16mm					
SS2M-16-20	CLM-1620-SS		20mm					
SS2M-16-30	-		30mm					
SS2M-16-40	-		40mm					
SS2M-16-50	-	16mm	50mm	M12 x 1.75	18.3	24.0	10.9	14mm
SS2M-16-60	-		60mm					
SS2M-16-70	-		70mm					
SS2M-16-80	-		80mm					
SS2M-16-90	-		90mm					
SS2M-16-100	-		100mm					
SS2M-16-120	-		120mm					
SS2M-20-16	CLM-2016-SS		16mm					
SS2M-20-20	CLM-2020-SS		20mm					
SS2M-20-25	CLM-2025-SS		25mm					
SS2M-20-40	-		40mm					
SS2M-20-50	-		50mm					
SS2M-20-60	-	20mm	60mm	M16 x 2.0	22.4	30.0	14.9	17mm
SS2M-20-70	-		70mm					
SS2M-20-80	-		80mm					
SS2M-20-90	-		90mm					
SS2M-20-100	-		100mm					
SS2M-20-120	-		120mm					
SS2M-24-50	-		50mm					
SS2M-24-60	-		60mm					
SS2M-24-70	-		70mm					
SS2M-24-80	-	24mm	80mm	M20 x 2.5	26.0	36.0	17.9	19mm
SS2M-24-90	-		90mm					
SS2M-24-100	-		100mm					
SS2M-24-120	-		120mm					

† “Other Refs.” are equivalent dimensions, but these have lower tolerance on shoulder diameters

HEXAGON KEYS
INCH SIZES
MATERIAL - HIGH GRADE ALLOY STEEL



Specifications: Hardness for sizes under 3/8" RC 48
Hardness for sizes 3/8" and larger is RC 45
ASME/ANSI B18.3 1986

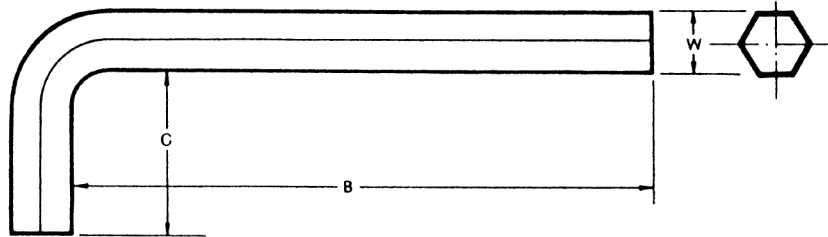


Harcourt Code	W Wrench Size A/F		B Nominal		C Nominal	Min. Torsional Shear Strength	Min. Torsional Yield	Minimum Torque
	Max. (Nom.)	Min.	short arm	long arm*		lb. in.	lb. in.	in. lb.
HXK-028	.028	.0275	1.219	2.594	.219	1.2	1.1	.86
HXK-035	.035	.0345	1.219	2.672	.344	2.4	2.1	1.80
HXK-050	.050	.0490	1.656	2.844	.531	7	6	5.00
HXK-116	1/16	.0615	1.750	3.000	.562	12	11	9.50
HXK-564	5/64	.0771	1.875	3.188	.609	26	23	19.40
HXK-332	3/32	.0927	2.000	3.375	.656	46	40	33.50
HXK-764	7/64	.1077	2.125	3.562	.703	73	63	52.90
HXK-18	1/8	.1235	2.250	3.750	.750	108	94	77.90
HXK-964	9/64	.1391	2.375	3.937	.796	154	134	117.00
HXK-532	5/32	.1547	2.500	4.125	.844	210	183	156.00
HXK-316	3/16	.1860	2.750	4.500	.938	364	317	273.00
HXK-732	7/32	.2172	3.000	4.875	1.031	580	502	428.00
HXK-14	1/4	.2480	3.250	5.250	1.125	860	750	615.00
HXK-516	5/16	.3110	3.750	6.000	1.250	1685	1465	1315.00
HXK-38	3/8	.3730	4.250	6.750	1.375	2900	2520	2150.00
HXK-716	7/16	.4355	4.750	7.500	1.500	4400	3860	3665.00
HXK-12	1/2	.4975	5.250	8.250	1.625	6600	5750	5130.00
HXK-916	9/16	.5600	5.750	9.000	1.750	9200	8000	7010.00
HXK-58	5/8	.6225	6.250	9.750	1.875	12650	11000	9810.00
HXK-34	3/4	.7470	7.250	11.250	2.125	20800	18100	15570.00
HXK-78	7/8	.8720	8.250	12.750	2.375	29200	25400	23400.00
HXK-1	1	.9970	9.250	14.250	2.625	43700	38000	35100.00
HXK-114	1-1/4	1.243	11.250	-	3.000	71900	62500	-
HXK-112	1-1/2	1.493	13.250	-	3.500	124000	108000	-
HXK-134	1-3/4	1.743	15.250	-	4.000	198000	172000	-
HXK-2	2	1.993	17.250	-	4.500	276000	240000	-

* For long arm style, add "-L" to end of code. So, 1/4" long arm code is HXK-14-L

HEXAGON KEYS
METRIC SIZES
MATERIAL - HIGH GRADE ALLOY STEEL



Specifications: Hardness for sizes under 10mm RC 48
Hardness for sizes 10mm and larger is RC 45
ASME/ANSI B18.3.2M 1979
ISO 2936 DIN 911

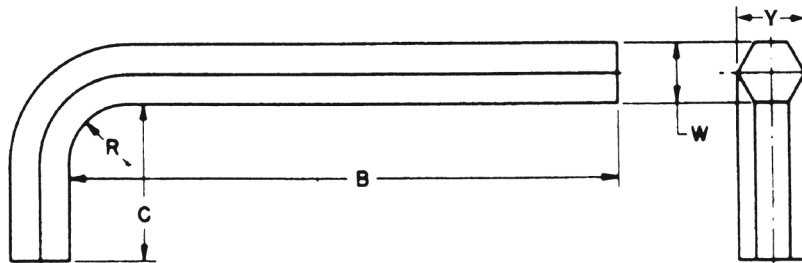

<i>Harcourt</i> Code	Nominal Key or Bit and Socket Size	W		Y		B				C		R
		Hexagon Width Across Flats		Hexagon Width Across Corners								Radius of Bend
		Max.	Min.	Max.	Min.	Short Arm		Long Arm*		Max.	Min.	
HXKM-07	0.7	0.711	0.698	0.798	0.762	34	28	69	63	8	3	1.5
HXKM-09	0.9	0.899	0.876	0.998	0.960	34	28	71	65	11	6	1.5
HXKM-13	1.3	1.270	1.244	1.422	1.372	44	39	75	69	16	11	1.5
HXKM-15	1.5	1.500	1.470	1.690	1.640	45	43	78	76	14	13	1.5
HXKM-20	2	2.000	1.970	2.250	2.200	50	48	83	81	16	15	2.0
HXKM-25	2.5	2.500	2.470	2.820	2.770	56	53	90	87	18	17	2.5
HXKM-30	3	3.000	2.960	3.399	3.340	63	60	100	97	20	18	3.0
HXKM-40	4	4.000	3.960	4.532	4.470	70	66	106	102	25	23	4.0
HXKM-50	5	5.000	4.960	5.690	5.630	80	76	118	114	28	26	5.0
HXKM-60	6	6.000	5.950	6.828	6.760	90	86	140	136	32	30	6.0
HXKM-80	8	8.000	7.950	9.136	9.030	100	95	160	155	36	34	8.0
HXKM-100	10	10.000	9.950	11.470	11.340	112	106	170	164	40	38	10.0
HXKM-120	12	12.000	11.950	13.764	13.590	125	119	212	206	45	43	12.0
HXKM-140	14	14.000	13.930	16.058	15.880	140	133	236	229	56	53	14.0
HXKM-170	17	17.000	16.930	19.499	19.300	160	152	250	242	63	60	17.0
HXKM-190	19	19.000	18.930	21.793	21.580	180	171	280	271	70	67	19.0
HXKM-220	22	22.000	21.930	25.234	25.000	200	190	335	325	80	76	22.0
HXKM-240	24	24.000	23.930	27.525	27.240	224	213	375	364	90	86	24.0
HXKM-270	27	27.000	26.870	30.969	30.710	250	238	-	-	100	95	27.0
HXKM-320	32	32.000	31.840	36.704	36.430	315	300	-	-	125	119	32.0
HXKM-360	36	36.000	35.840	41.292	40.900	355	338	-	-	140	133	36.0

* For long arm style, add "-L" to end of code. So, 5mm long arm code is HXKM-50-L

SPRING TENSION PINS (ROLL PINS) - ANSI B18.8.2 1978


INCH SIZES

MATERIAL - AISI 1070-1095 and AISI 420 STEEL



DIMENSIONAL & TECHNICAL DATA:

Pin. Dia. Nominal	A		B	C	Wall Thickness	Recommended Hole Size		Min. Double Shear Strength in Pounds
	Max. Dia. Go Ring Gage	D1+D2+D3 3	Max.	Nom.		Min.	Max.	
1/16 (.062)	.069	.066	.059	.011	.012	.062	.065	430
5/64 (.078)	.086	.083	.075	.014	.018	.078	.081	800
3/32 (.094)	.103	.099	.091	.018	.022	.094	.097	1150
1/8 (.125)	.135	.131	.122	.024	.028	.125	.129	1875
5/32 (.156)	.167	.162	.151	.028	.032	.156	.160	2750
3/16 (.187)	.199	.194	.182	.036	.040	.187	.192	4150
1/4 (.250)	.264	.258	.245	.042	.050	.250	.256	7050
5/16 (.312)	.330	.321	.306	.060	.062	.312	.318	10,800
3/8 (.375)	.395	.385	.368	.060	.077	.375	.382	16,300
1/2 (.500)	.524	.513	.485	.060	.094	.500	.510	27,100

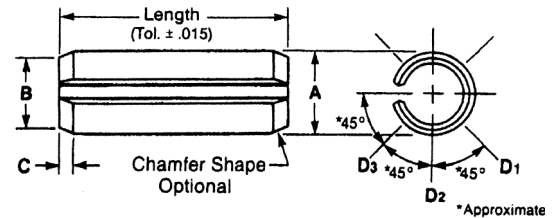

LENGTH TOLERANCES:

0.187 to 1.000	±.015
1.001 to 2.000	±.020
2.001 to 3.000	±.025
3.001 to 4.000	±.030

Diam. Length	1/16 .062	5/64 .078	3/32 .094	1/8 .125	5/32 .156	3/16 .187	1/4 .250	5/16 .312	3/8 .375	1/2 .500
3/16	STP-01-03	-	-	-	-	-	-	-	-	-
1/4	STP-01-04	STP-013-04	STP-015-04	STP-02-04	-	-	-	-	-	-
5/16	STP-01-05	STP-013-05	STP-015-05	-	-	-	-	-	-	-
3/8	STP-01-06	STP-013-06	STP-015-06	STP-02-06	STP-025-06	STP-03-06	-	-	-	-
7/16	STP-01-07	-	STP-015-07	STP-02-07	-	-	-	-	-	-
1/2	STP-01-08	STP-013-08	STP-015-08	STP-02-08	STP-025-08	STP-03-08	STP-04-08	-	-	-
5/8	STP-01-10	STP-013-10	STP-015-10	STP-02-10	STP-025-10	STP-03-10	STP-04-10	-	-	-
3/4	STP-01-12	STP-013-12	STP-015-12	STP-02-12	STP-025-12	STP-03-12	STP-04-12	STP-05-12	STP-06-12	-
7/8	-	-	STP-015-14	STP-02-14	STP-025-14	STP-03-14	-	-	-	-
1	STP-01-16	-	STP-015-16	STP-02-16	STP-025-16	STP-03-16	STP-04-16	STP-05-16	STP-06-16	-
1-1/8	-	-	-	-	-	STP-03-18	-	-	-	-
1-1/4	-	-	STP-015-20	STP-02-20	STP-025-20	STP-03-20	STP-04-20	STP-05-20	STP-06-20	STP-08-20
1-3/8	-	-	-	-	-	STP-03-22	-	-	-	-
1-1/2	-	-	STP-015-24	STP-02-24	STP-025-24	STP-03-24	STP-04-24	STP-05-24	STP-06-24	STP-08-24
1-3/4	-	-	-	-	-	STP-03-28	STP-04-28	STP-05-28	STP-06-28	STP-08-28
2	-	-	-	STP-02-32	-	STP-03-32	STP-04-32	STP-05-32	STP-06-32	STP-08-32
2-1/2	-	-	-	-	-	-	STP-04-40	STP-05-40	STP-06-40	STP-08-40
3	-	-	-	-	-	-	STP-04-48	-	STP-06-48	STP-08-48
3-1/2	-	-	-	-	-	-	-	-	-	STP-08-56
4	-	-	-	-	-	-	-	-	STP-06-64	-

SPRING TENSION PINS (ROLL PINS) - ISO 8752


METRIC SIZES



HARDNESS - 422-560 HV

DIMENSIONAL & TECHNICAL DATA:

Nominal Diam. mm	Chamfer Length a		Diameter d		Wall Thickness s	Recommended Hole Size		Shear Strength	
	Min.	Max.	Min.	Max.		Min.mm	Max.mm	k _n Single	k _n Double
2	0.35	0.55	2.3	2.4	0.4	2.0	2.1	1.41	2.82
2.5	0.4	.6	2.8	2.9	0.5	2.5	2.6	2.19	4.38
3	0.5	.7	3.3	3.5	0.6	3	3.1	3.16	6.32
3.5	0.6	.8	3.8	4	0.75	3.5	3.65	4.53	9.06
4	0.65	.85	4.4	4.6	0.8	4	4.12	5.62	11.24
4.5	0.8	1.0	4.9	5.1	1	4.5	4.62	7.68	15.36
5	0.9	1.1	5.4	5.6	1	5	5.12	8.77	17.54
6	1.2	1.4	6.4	6.7	1.2	6	6.12	13.02	26.04
8	1.6	2.0	8.5	8.8	1.5	8	8.15	21.38	42.76
10	2	2.4	10.5	10.8	2	10	10.15	35.08	70.16
12	2	2.4	12.5	12.8	2.5	12	12.17	52.07	104.10

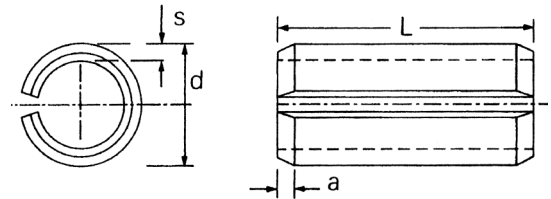

LENGTH TOLERANCES:

2mm - 10mm long	±0.25mm
12mm - 50mm long	±0.50mm
55mm - 100mm long	±0.75mm

Diam. L Length	2mm	2.5mm	3mm	3.5mm	4mm	5mm	6mm	8mm	10mm	12mm
4	STPM-02-04	STPM-025-04	STPM-03-04	STPM-035-04	STPM-04-04	-	-	-	-	-
5	STPM-02-05	STPM-025-05	STPM-03-05	STPM-035-05	STPM-04-05	STPM-05-05	-	-	-	-
6	STPM-02-06	STPM-025-06	STPM-03-06	STPM-035-06	STPM-04-06	STPM-05-06	-	-	-	-
8	STPM-02-08	STPM-025-08	STPM-03-08	STPM-035-08	STPM-04-08	STPM-05-08	-	-	-	-
10	STPM-02-10	STPM-025-10	STPM-03-10	STPM-035-10	STPM-04-10	STPM-05-10	STPM-06-10	STPM-08-10	-	-
12	STPM-02-12	STPM-025-12	STPM-03-12	STPM-035-12	STPM-04-12	STPM-05-12	STPM-06-12	STPM-08-12	-	-
14	STPM-02-14	STPM-025-14	STPM-03-14	STPM-035-14	STPM-04-14	STPM-05-14	STPM-06-14	STPM-08-14	STPM-10-14	-
16	STPM-02-16	STPM-025-16	STPM-03-16	STPM-035-16	STPM-04-16	STPM-05-16	STPM-06-16	STPM-08-16	STPM-10-16	-
18	STPM-02-18	STPM-025-18	STPM-03-18	STPM-035-18	STPM-04-18	STPM-05-18	STPM-06-18	STPM-08-18	STPM-10-18	-
20	STPM-02-20	STPM-025-20	STPM-03-20	STPM-035-20	STPM-04-20	STPM-05-20	STPM-06-20	STPM-08-20	STPM-10-20	STPM-12-20
22	STPM-02-22	STPM-025-22	STPM-03-22	STPM-035-22	STPM-04-22	STPM-05-22	STPM-06-22	STPM-08-22	STPM-10-22	STPM-12-22
24	STPM-02-24	STPM-025-24	STPM-03-24	STPM-035-24	STPM-04-24	STPM-05-24	STPM-06-24	STPM-08-24	STPM-10-24	STPM-12-24
26	STPM-02-26	STPM-025-26	STPM-03-26	STPM-035-26	STPM-04-26	STPM-05-26	STPM-06-26	STPM-08-26	STPM-10-26	STPM-12-26
28	STPM-02-28	STPM-025-28	STPM-03-28	STPM-035-28	STPM-04-28	STPM-05-28	STPM-06-28	STPM-08-28	STPM-10-28	STPM-12-28
30	STPM-02-30	STPM-025-30	STPM-03-30	STPM-035-30	STPM-04-30	STPM-05-30	STPM-06-30	STPM-08-30	STPM-10-30	STPM-12-30
32	-	-	STPM-03-32	STPM-035-32	STPM-04-32	STPM-05-32	STPM-06-32	STPM-08-32	STPM-10-32	STPM-12-32
36	-	-	STPM-03-36	STPM-035-36	STPM-04-36	STPM-05-36	STPM-06-36	STPM-08-36	STPM-10-36	STPM-12-36
40	-	-	STPM-03-40	STPM-035-40	STPM-04-40	STPM-05-40	STPM-06-40	STPM-08-40	STPM-10-40	STPM-12-40
45	-	-	-	-	STPM-04-45	STPM-05-45	STPM-06-45	STPM-08-45	STPM-10-45	STPM-12-45
50	-	-	-	-	STPM-04-50	STPM-05-50	STPM-06-50	STPM-08-50	STPM-10-50	STPM-12-50
55	-	-	-	-	-	STPM-05-55	STPM-06-55	STPM-08-55	STPM-10-55	STPM-12-55
60	-	-	-	-	-	STPM-05-60	STPM-06-60	STPM-08-60	STPM-10-60	STPM-12-60
70	-	-	-	-	-	STPM-05-70	STPM-06-70	STPM-08-70	STPM-10-70	STPM-12-70
75	-	-	-	-	-	STPM-05-75	STPM-06-75	STPM-08-75	STPM-10-75	STPM-12-75
80	-	-	-	-	-	STPM-05-80	STPM-06-80	STPM-08-80	STPM-10-80	STPM-12-80
90	-	-	-	-	-	-	STPM-06-90	STPM-08-90	STPM-10-90	STPM-12-90
95	-	-	-	-	-	-	STPM-06-95	STPM-08-95	STPM-10-95	STPM-12-95
100	-	-	-	-	-	-	STPM-06-100	STPM-08-100	STPM-10-100	STPM-12-100


SPRING TENSION PINS (ROLL PINS) - STAINLESS STEEL
INCH SIZES
MATERIAL - 420 STAINLESS STEEL



HARDNESS - ROCKWELL C 43-52

DIMENSIONAL & TECHNICAL DATA:

Pin. Dia. Nominal	A		B		C		Recommended Hole Size		Min. Double Shear Strength in Pounds
	Max. Dia. Go Ring Gage	D1+D2+D3 3	Max.	Nom.	Wall Thickness		Min.	Max.	
1/16 (.062)	.069	.066	.059	.011	.012		.062	.065	430
5/64 (.078)	.086	.083	.075	.014	.018		.078	.081	800
3/32 (.094)	.103	.099	.091	.018	.022		.094	.097	1150
1/4 (.125)	.135	.131	.122	.024	.028		.125	.129	1875
5/32 (.156)	.167	.162	.151	.028	.032		.156	.160	2750
3/16 (.187)	.199	.194	.182	.036	.040		.187	.192	4150
7/32 (.219)	.232	.226	.214	.042	.048		.219	.224	5850
1/4 (.250)	.264	.258	.245	.042	.050		.250	.256	7050
5/16 (.312)	.330	.321	.306	.060	.062		.312	.318	10,800
3/8 (.375)	.395	.385	.368	.060	.077		.375	.382	16,300
7/16 (.437)	.459	.448	.430	.060	.077		.437	.445	19,800
1/2 (.500)	.524	.513	.485	.060	.094		.500	.510	27,100

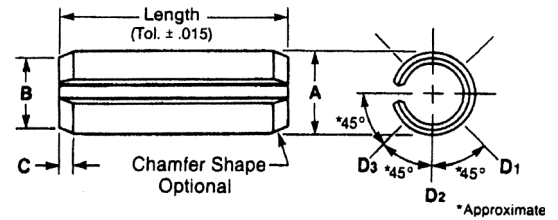

LENGTH TOLERANCES:

0.187 to 1.000	±.015
1.001 to 2.000	±.020
2.001 to 3.000	±.025
3.001 to 4.000	±.030

Diam. Length	1/16 .062	5/64 .078	3/32 .094	1/8 .125	5/32 .156	3/16 .187	7/32 .219	1/4 .250	5/16 .312	3/8 .375	1/2 .500
3/16	STPS-01-03	STPS-013-03	-	-	-	-	-	-	-	-	-
1/4	STPS-01-04	STPS-013-04	STPS-015-04	STPS-02-04	-	-	-	-	-	-	-
5/16	STPS-01-05	STPS-013-05	STPS-015-05	-	-	-	-	-	-	-	-
3/8	STPS-01-06	STPS-013-06	STPS-015-06	STPS-02-06	STPS-025-06	STPS-03-06	-	-	-	-	-
7/16	STPS-01-07	STPS-013-07	STPS-015-07	STPS-02-07	STPS-025-07	-	-	-	-	-	-
1/2	STPS-01-08	STPS-013-08	STPS-015-08	STPS-02-08	STPS-025-08	STPS-03-08	-	STPS-04-08	-	-	-
9/16	STPS-01-09	STPS-013-09	STPS-015-09	STPS-02-09	STPS-025-09	STPS-03-09	STPS-035-09	-	-	-	-
5/8	STPS-01-10	STPS-013-10	STPS-015-10	STPS-02-10	STPS-025-10	STPS-03-10	STPS-035-10	STPS-04-10	-	-	-
11/16	STPS-01-11	STPS-013-11	STPS-015-11	STPS-02-11	STPS-025-11	STPS-03-11	STPS-035-11	STPS-04-11	-	-	-
3/4	STPS-01-12	STPS-013-12	STPS-015-12	STPS-02-12	STPS-025-12	STPS-03-12	STPS-035-12	STPS-04-12	STPS-05-12	STPS-06-12	-
13/16	STPS-01-13	STPS-013-13	STPS-015-13	STPS-02-13	STPS-025-13	STPS-03-13	STPS-035-13	STPS-04-13	STPS-05-13	-	-
7/8	STPS-01-14	STPS-013-14	STPS-015-14	STPS-02-14	STPS-025-14	STPS-03-14	STPS-035-14	STPS-04-14	STPS-05-14	-	-
15/16	STPS-01-15	STPS-013-15	STPS-015-15	STPS-02-15	STPS-025-15	STPS-03-15	STPS-035-15	STPS-04-15	STPS-05-15	-	-
1	STPS-01-16	STPS-013-16	STPS-015-16	STPS-02-16	STPS-025-16	STPS-03-16	STPS-035-16	STPS-04-16	STPS-05-16	STPS-06-16	-
1-1/8	-	STPS-013-18	STPS-015-18	STPS-02-18	STPS-025-18	STPS-03-18	STPS-035-18	STPS-04-18	-	-	-
1-1/4	-	STPS-013-20	STPS-015-20	STPS-02-20	STPS-025-20	STPS-03-20	STPS-035-20	STPS-04-20	STPS-05-20	STPS-06-20	STPS-08-20
1-3/8	-	STPS-013-22	STPS-015-22	STPS-02-22	STPS-025-22	STPS-03-22	STPS-035-22	STPS-04-22	STPS-05-22	-	-
1-1/2	-	STPS-013-24	STPS-015-24	STPS-02-24	STPS-025-24	STPS-03-24	STPS-035-24	STPS-04-24	STPS-05-24	STPS-06-24	STPS-08-24
1-5/8	-	-	-	STPS-02-26	STPS-025-26	STPS-03-26	STPS-035-26	STPS-04-26	STPS-05-26	-	-
1-3/4	-	-	-	STPS-02-28	STPS-025-28	STPS-03-28	STPS-035-28	STPS-04-28	STPS-05-28	STPS-06-28	STPS-08-28
1-7/8	-	-	-	-	STPS-025-30	STPS-03-30	STPS-035-30	STPS-04-30	STPS-05-30	-	-
2	-	-	-	STPS-02-32	STPS-025-32	STPS-03-32	STPS-035-32	STPS-04-32	STPS-05-32	STPS-06-32	STPS-08-32
2-1/4	-	-	-	-	STPS-025-36	STPS-03-36	STPS-035-36	STPS-04-36	STPS-05-36	STPS-06-36	STPS-08-36
2-1/2	-	-	-	-	STPS-025-40	STPS-03-40	STPS-035-40	STPS-04-40	STPS-05-40	STPS-06-40	STPS-08-40
2-3/4	-	-	-	-	-	-	-	STPS-04-44	-	STPS-06-44	STPS-08-44
3	-	-	-	-	-	-	STPS-035-48	STPS-04-48	STPS-05-48	STPS-06-48	STPS-08-48
3-1/4	-	-	-	-	-	-	-	STPS-04-52	STPS-05-52	STPS-06-52	STPS-08-52
3-1/2	-	-	-	-	-	-	-	STPS-04-56	STPS-05-56	STPS-06-56	STPS-08-56
3-3/4	-	-	-	-	-	-	-	-	STPS-05-60	STPS-06-60	STPS-08-60
4	-	-	-	-	-	-	-	-	STPS-05-64	STPS-06-64	STPS-08-64