


Thread Inserts



ABOUT THE PRODUCT

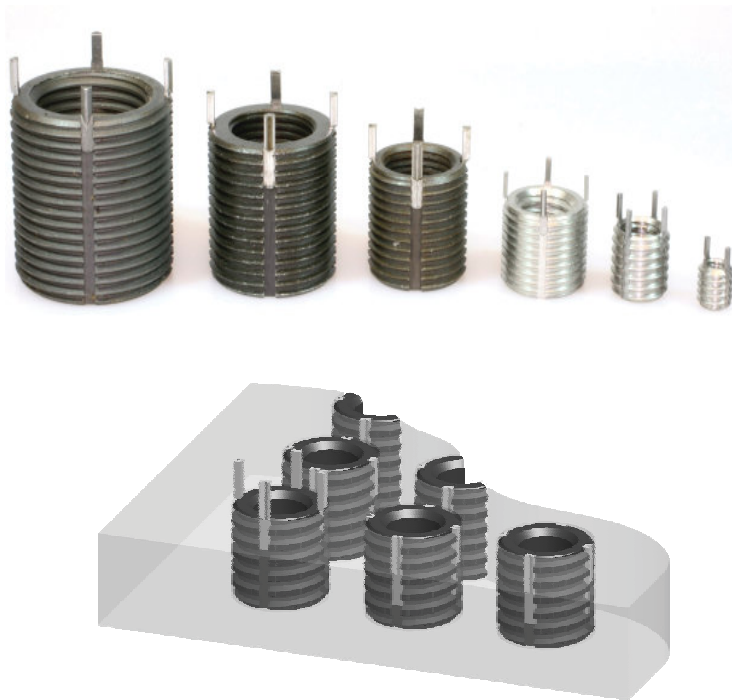

This family of products is used to provide strong, permanent, metal threads in virtually any material - ferrous, non-ferrous, or non-metallic. They are strong, solid-walled, one-piece, key or self locking inserts.

The locking keys or epoxy provides a positive lock which prevents rotation due to vibration or torsion.


Thread inserts are available in the following styles: thinwall, heavy duty, solid, internal locking, and self locking. Thread inserts are also available in both inch and metric sizes in carbon steel and stainless steel.

Applications include reinforcing of tapped holes in aluminum plates and repair of worn, stripped, or damaged threads. The solid version can be used to plug holes that may have been placed in the incorrect location.


Important: The tap drill to be used is slightly larger than would normally be used for that thread size - refer to the applicable table.

INSTALLATION AND REMOVAL


INSTALLATION

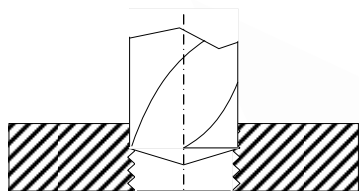


Drill out old threads with a standard drill. **Note: Drill is oversized - see charts for proper dimensions.** Chamfer holes with a standard countersink (82° - 100°)

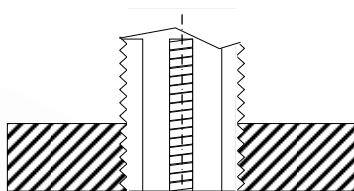

Tap new threads using a standard tap. See charts for proper size and depth.

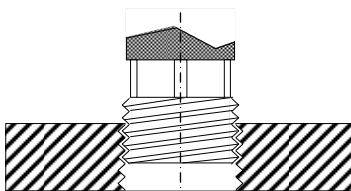


Screw in insert until slightly below the surface (.010 - .030), by hand or by using an installation tool. Keys act as a depth stop.

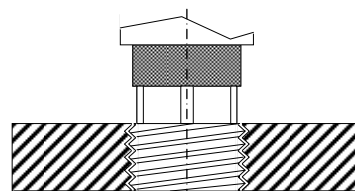


Drive keys down with several light hammer taps on the installation tool.


REMOVAL

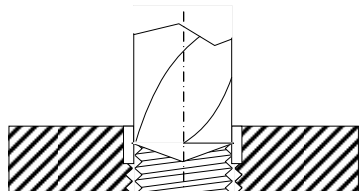


Drill out material between keys and internal thread with standard drill to specified depth (refer to charts for proper dimensions).

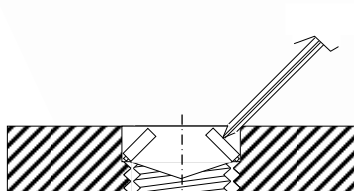

Deflect keys inward and break off.

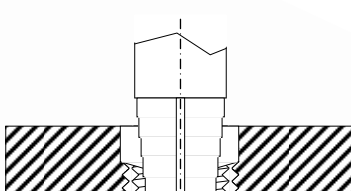

Remove using an E-Z Out or similar type tool.

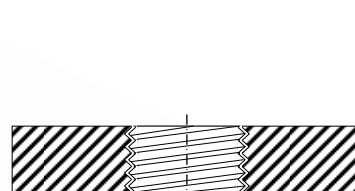

Same size replacement may be installed in the original hole.

