
Sinko enclosure

Orange Pi Zero 3 · print order · 2 colours · qty 1 set
case v1.1 · assembled 60.6 × 60.6 × 25.8 mm





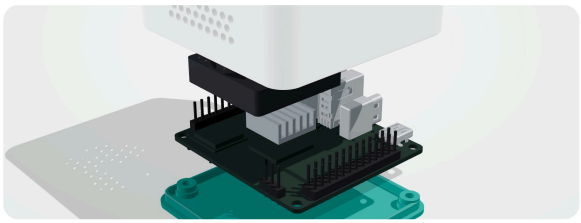

PARTS

FILE	COLOUR	SIZE, MM	VOLUME	ORIENTATION
Sinko-case_LID.stl	Pearl white, matte #F1F4F2 ≈ RAL 9016	60.6 × 60.6 × 23.5	17.5 cm³	Top face down on the bed
Sinko-case_BASE.stl	Sinko teal, matte #0F766E ≈ RAL 5021	59.0 × 59.0 × 5.5	7.5 cm³	Flat, bottom down
Sinko-case_LID_logo-inlay_OPTIONAL.stl	Same teal as base	8.9 × 30.6 × 0.6	0.06 cm³	Multi-colour FDM only, loaded with the lid at the same origin. Otherwise skip.

STEP versions of all three files are included for CAD-based quoting.

PROCESS & SETTINGS

Process	FDM (preferred) or SLS / MJF PA12, dyed
Material	PETG or ASA. Not PLA (runs ≈ 50 °C)
Layer height	0.16 – 0.20 mm
Walls / infill	3 perimeters · 20 % gyroid
Supports	None needed in the exported orientation
Bed surface	Textured PEI gives the lid top a fine matte finish





CRITICAL: PLEASE KEEP

- **Scale 100 %**, units millimetres. Do not compensate holes.
- Lid ↔ base sliding fit is 0.2 mm per side.
- 4 lid post screw bores, Ø2.4 × 13.5 mm blind: M2.5 screws cut their own thread. Do not drill out.
- Base screw holes Ø2.9 with Ø5.0 counterbores.
- USB-C opening 4.2 × 10 mm in a 1.2 mm dish; Ethernet window as drawn.
- Snap clips inside the lid (fan pocket) are 1.0 mm thick and must flex; no brittle resins.
- Top grille and front vent holes are Ø2.0 mm; please keep them open and clean.
- Sinko logo is engraved 0.6 mm into the top (at the bed). Finest line 0.65 mm: use elephant-foot compensation so it stays crisp.

CUSTOMER SUPPLIES (NOT PRINTED)

- 4 × M2.5 × 12 screws, head ≤ Ø4.8
- 1 × 30 × 30 × 7 mm 5 V fan
- 1 × 14 × 14 × ≤6 mm heatsink
- 4 × Ø10 mm rubber bumpers