STARLET®



WELDING MACHINES
PRODUCT CATALOGUE

PoWer ARC 200 PRO 3

PoWerPlus ARC 400 4

PoWer ARC 400 C 5

PoWerPlus MIG 200 6

PoWer MIG 210 Pulse 7

PoWerPlus MIG 250 PFC 8

PoWer MIG 255 Pulse 9

PoWer MIG 500 10

PoWer MIG GS 3500 11

PoWer MIG GPS 3500-R 12

PoWer MIG 3500 LST-R 13

PoWer MIG GS 5000 14

PoWer MIG GPS 5000-R 15

PoWer TIG 202 DC Pulse 16

PoWerPlus TIG 200 DC PFC 17

PoWerPlus TIG 200 AC/DC Pulse PFC 18

POWER TIG 270 TP 19

3PoWerPlus TIG 400 DC Pulse 20

PoWer TIG 2200 DC Pulse 21

PoWer TIG 3000 DC Pulse 22

PoWer TIG 3000 AC/DC Pulse 23

PoWer TIG 4000 AC/DC Pulse 24

PoWerTech 4000 / 5000 Vision Pulse 25

PoWerPLUS CUT 65 26

PoWerPlus CUT 100 27

PoWer CUT 155 28

PoWerPlus CUT 40 PFC MV 29

PoWer Saw 1000 30

GeKaLaser H Serisi 31

GeKaLaser P Serisi 32

GeKaLaser E Serisi 33

GeKaLaser M Serisi 34



Inverter

Suitable for ø2.5-4.0 mm electrodes

Lightweight

MMA 1~ LIFT CC DC + - CE

Input Voltage	V	1 Phase 220 V, 50/60 Hz
Installed Power	kW	6,8
Fuse (delayed action)	A	31
No Load Voltage	V	63
Current Range	A	50-200
Duty Cycle at (40°C)	%12 - %60 - %100	200 - 145 - 110
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	300 / 150 / 290
Weight	kg	5,395

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments

3020900201





2020900841



2020900842



6051900088
(Optional)



MMA | TIG (WIG) | Duty Cycle 60% | VRD safe | PLP safe | 3 Phase 50/60Hz | PROTEC 440V | CE

Designed for heavy industrial use

Suitable for Ø2.5-5.0 mm electrodes

Lightweight

TIG Mode
- Lift-TIG available

Extra Functions
- Hot Start
- Arc Force
- Anti Stick
- VRD Fonksiyonu

Protection Functions
- Thermal Protection
- Phase missing
- Overcurrent Protection
- Overvoltage Protection

Design
- Plastic front and rear panels
- Durable metal body
- Light weight

Input Voltage	V	***3 Phase, 50/60 Hz, 380 V ±%10***
Installed Power	kW	***22,8***
Fuse (delayed action)	A	***16***
No Load Voltage	V	***92***
Current Range	A	***20-400***
Duty Cycle at (40°C)	%60 %100	***400 / 300***
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	***21S***
Insulation Class		***H***
Dimensions (L*W*H)	mm	***485 / 240 / 445***
Weight	kg	***19***

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

3021000094



1021000059



2020900647



2020900648



6051900088 (Optional)

Perfect welding capability for all types of electrodes with Ø 2,0 - 5,0 mm diameter.



Designed for heavy industrial use

MMA with any kind of electrodes, including cellulosic

Working with up to 100m supply cable

TIG Mode
- Lift-TIG available

Extra Functions
- Hot Start
- Arc Force
- Anti Stick (VRD Optional)
- Remote Control (Optional)

Usage Areas
- Shipyards
- Off-Shores
- Industrial Facilities
- Pipe Lines
- Maintenance and Repair Applications

Input Voltage	V	***3 Phase, 50/60 Hz, 380 V ±%15***
Installed Power	kW	***15***
Fuse (delayed action)	A	***32***
No Load Voltage	V	***22***
Current Range	A	***20-400***
Duty Cycle at (40°C)	%60 %100	***400A / 310A***
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	***21S***
Insulation Class		***H***
Dimensions (L*W*H)	mm	***605 / 330 / 565***
Weight	kg	***49***

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments
3021000096


1021000094


2020900647


2020900648


6051900088
(Optional)


6000000444

Perfect welding capability for all types of electrodes with Ø 2,0 - 6,0 mm diameter.



Excellent performance for welding thin materials

Suitable for 5 kg wire

Lightweight

Compact

MIG/MAG DIGITAL 888

Usage Areas

- Automotive Industry
- Advertising industry
- Maintenance and Repair Applications
- Industrial facilities

Welding Method		MIG/MAG
Input Voltage	V	1 Faz, 50/60 Hz, 220/230 V ±%10
Installed Power	kW	8,3
Delayed Fuse	A	40
No Load Voltage	V	46
Welding Current Range	A	40-200
Duty Cycle at (40°C)	%100 %60 %35	110 / 145 / 200
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	530 x 220 x 340
Weight	kg	14,5

Standard & Optional Equipments

This order code covers the welding machine and all of the equipments						
						
3021000136	**1021000092**	**1051900009**	**2020900841**	**1051300003**	**2020900723**	**6051900088** (Optional)



Inverter | MIG/MAG | MMA | LIFT | CC CV | 888 A/V | 1~ | CE

Multi-process

Compact

Suitable for 5-15 kg wire

Synergic, pulse, double pulse features

Lightweight

Also suitable for bronze and copper welding

Extra Functions

- Thermal Protection
- Overcurrent Protection
- Overvoltage Protection
- Plastic front and rear panels
- Durable metal body

Usage Areas


- Automotive
- Bodywork, sculpture
- Signage and advertising
- Industrial facilities
- Maintenance and repair applications
- Hobby applications etc...

Input Voltage	V	1 Faz, 50/60 Hz, 230 V ±%10
Installed Power	kW	9,7
Delayed Fuse	A	42
No Load Voltage	V	63
Welding Current Range	A	10-210
Duty Cycle at (40°C)	%100 %60 %35	125 / 160 / 210
Standards		**EN 60974-1 / EN 60974-10**
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	410 x 210 x 440
Weight	kg	16

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments						
						
3021000133	**1021000109**	**1051900010**	**2020900723**	**1051300003**	**6051900088** (Opsiyonel)	**2020900724** (Optional)



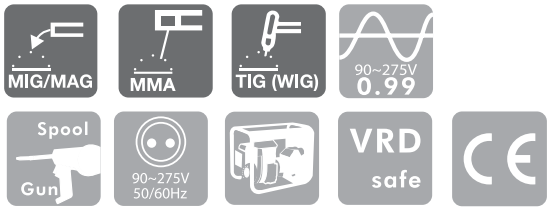

Designed for heavy industrial use

Multi-process

Environment friendly (Cos Ø :0.99)

Suitable for 5-15 kg wire

Multi Proses
- MIG, TIG and MMA welding modes

Extra Functions
- Inductance control
- VRD Function
- Working ability between 110-220 V input voltage
- Hot start / Arc Force/Down Slope Time
- Wire Inching / Gas Test / Standard TIG torch usage possibility
- Hot start (inside)

Protection Functions
- Thermal Protection
- Phase missing
- Overcurrent Protection
- Overvoltage Protection

Design
- Plastic front and rear panels
- Durable metal body

Welding Process		MIG / MAG	TIG	MMA
Input Voltage	V	1 Phase, 50/60 Hz, 220/230 V ±%10		
Installed Power	kW	8.3 32	6.4	9.2
Fuse (delayed action)	A	65		
No Load Voltage	V	40-250		
Current Range	A	150 / 195 / 250		
Duty Cycle at (40°C)	%100 %60 %35	150 / 195 / 250	150 / 195 / 250	140 / 180 / 250
Standards		**EN IEC 60974-1 / EN IEC 60974-10**		
Protection Class	IP	21 S		
Insulation Class		H		
Dimensions (L*W*H)	mm	618 x 240 x 445		
Weight	kg	23		

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

3021000082



1021000051



1051900010



2020900723



1051300003 (Ar)
1051300015 (CO2)



2020900724 (Optional)



6051900076 (Optional)



2020900180 (Optional)



Inverter

MIG/MAG MMA PULSED 1~ LIFT

CC CV SYN 888 A/V DC + - VRD

CE

Vision cold

Vision pipe

Vision arc

Double pulse

Compact

PoWer MIG 255 Pulse		MIG/MAG	TIG	MMA
Input Voltage	V	3 Phase 220/230 50/60 Hz ± 15%		
Installed Power	kW	10	8.5	11
Fuse (delayed action)	A	16	10	16
No Load Voltage	V	60 10-	60	60
Current Range	A	250	5-250	10-250
Duty Cycle at (40°C)	%100	180	180	180
	%60	200	200	200
	%35	250	250	250
Usable Wire Diameters		0.6-1.2	---	---
Standards		**EN 60974-1 / EN 60974-5 / EN 60974-10**		
Protection Class	IP	23		
Insulation Class		H		
Dimensions (L*W*H)	mm	650 / 300 / 388		
Weight	kg	21		

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments **3021000032** Air Cooled **3021000033** Water Cooled								
							
1021000071	**1051900010**	**2020900723**	**1051300003**	**2020900724** (Optional)	**6051900088** (Optional)	**1024300003** (Optional)	**2020900180** (Optional)



Inverter

MIG/MAG | CV | A / V | DC + - | 3~ | CE

Designed for heavy industrial use

Duty cycle (40°C) : 100%-500 A

Suitable for Ø0.8-2.0 mm wires

Usage Areas

- Maintenance and Repair Applications
- Construction
- Pipe Lines
- Shipyards
- Energy Plants

Input Voltage	V	3 Phase, 50/60 Hz, 380 V ±%10
Installed Power	kW	25
Delayed Fuse	A	40
No Load Voltage	V	82
Current Range	A	60-500
Voltage Range	V	17-39
Duty Cycle (40°)	%100	500
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection	IP	21 S
Inslation Class		H
Dimensions (DxWxH)	mm	605 x 330 x 565
Weight	kg	50
Wire Diameters	mm	0,8 / 1,6

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments (Water cooled)
3021000128

This order code covers the welding machine and all of the equipments (Gas cooled)
3021000127


2020900066


1051300003 (Ar)
1051300015


2020900660


2020900258 (Water cooled)
2020900268


1051900012 (Water cooled)
1051900011


1020900008


1021000103



Inverter

PULSED | MIG/MAG | MMA | LIFT | 3~

SYN | CC CV | 888 A/V | DC + - | CE

Designed for heavy industrial use

Multi-process

Synergic, pulse

Suitable for mild steel, stainless steel, aluminum and bronze welding

Extra Functions

- Waveform control for added stability of the arc, even at low current leves
- Parameter saving possiblity
- Multifunctional, MIG / Lift-TIG, MMA, FCAW and Gauging Modes
- Current –Voltage adjustment during welding
- 4 roll wire feding unit
- 2T/4T Trigger Modes
- Arc Force
- Hot Start
- Arc Control

Usage Areas

- Production
- Construction
- Pipe Lines
- Shipyards
- Maintenance and Repair Applications
- Energy Plants

Input Voltage	V	3 Phase, 50/60 Hz, 400 V ±%10
Installed Power	kW	14
Delayed Fuse	A	32
No Load Voltage	V	101
Welding Current Range	A	60-350
Output Voltage Range	A	17-31,5
Duty Cycle at (40°C)	%100 %60	270 / 350
Standards		**EN IEC 60974-1 / EN 60974-10:2014**
Protection Class	IP	21 S
Inslation Class		H
Dimensions (L*W*H)	mm	605 x 330 x 565
Weight	kg	49
Wire Diameters	mm	0,8 / 1,0 / 1,2

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments (Water Cooled) **3021000090**

This order code covers the welding machine and all of the equipments (Gas Cooled) **3021000089**



1021000056



1020900000



1024300007



2020900066



1051300003 (Ar)
1051300015 (CO2)



2020901327



2020900957 (Water Cooled)
2020900958 (Gas Cooled)



6051900088 (Optional)



6051900107 (Optional)



1051900012 (Water Cooled)
1051900011 (Gas Cooled)



Designed for heavy industrial use

Multi-process

Synergic, pulse

Suitable for mild steel, stainless steel, aluminum and bronze welding

Easy connection to Automation & Robotic Systems

Rated input voltage /frequency (V/Hz)	3 phase, AC380V±10%, 50 /60Hz
Rated input capacity (KW)	15.5
Rated input current(A)	24
Range of welding current(A)	60~350
Range of welding voltage(V)	17~31.5
OCV(V)	84
Duty cycle (%)	60
Wire diameter (mm)	Ø0.8, Ø1.0, Ø1.2
Gas flow (L/min)	15~20
Dimension (mm)	660x320x560
Weight (kg /lb)	50 /110.2
Insulation class	H
Protection class	IP 21S

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments **6021000116**



Designed for heavy industrial use

Multi-process

Synergic

Suitable for mild steel, stainless steel welding

Easy connection to Automation & Robotic Systems

Power voltage / Frequency (3~)	AC380/400/415V ± 10%, 50Hz
Rated input capacity (KW)	14
Rated input current (A)	26/25/24
Welding current range (A)	60~350
Welding voltage range (V)	17~31.5
OCV (V)	90
Duty cycle (%)	60
Efficiency (%)	≥87
Wire diameter (mm)	Ø0.8, Ø1.0, Ø1,2
Gas flow (L/min)	15~20
Dimension (mm3)	660×320×560
Weight (Kg)	55
Insulation class	H
IP class	IP21S

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments	**6021000114**



Inverter

PULSED MIG/MAG MMA LIFT 3~

SYN CC CV A/V DC +- CE

Designed for heavy industrial

use Duty cycle (40°C): 100%-500

A Multi-process

Synergic, pulse

Suitable for mild steel, stainless steel, aluminum and bronze welding

Extra Functions

- Waveform control for added stability of the arc, even at low current leves
- MIG / Lift-TIG, MMA, FCAW and Gauging modes
- Current-Voltage adjustment possible duringwelding
- 4 roll wire feeding unit
- 2T/4T Trigger modes
- Arc Force
- Hot Start
- Arc Control

Usage Areas

- Production
- Construction
- Pipe Lines
- Shipyards
- Maintenance and Repair Applications
- Energy Plants

Input Voltage	V	3 Phase, 50/60 Hz, 400 V ±%10
Installed Power	kW	25
Delayed Fuse	A	40
No Load Voltage	V	106
Welding Current Range	A	60-500
Output Voltage Range	V	17-39
Duty Cycle at (40°C)	%100 %60	387 / 500
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	21 S
Inslation Class		H
Dimensions (L*W*H)	mm	605 x 330 x 565
Weight	kg	57
Wire Diameters	mm	0,8 / 1,0 / 1,2 / 1,6

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments (Water Cooled) **3021000092**	This order code covers the welding machine and all of the equipments (Gas Cooled) **3021000091**	 **1021000057**	 **1020900003**	 **1024300007**	 **2020900066**	 **1051300003** (Ar) **1051300015** (CO_2)	 **2020901329**	 **2020900963** (Water Cooled) **2020900964** (Gas Cooled)	 **1051900012** (Water Cooled) **1051900011** (Gas Cooled)	 **6051900088** (Optional)	 **6051900107** (Optional)



- Designed for heavy industrial use
- Duty cycle (40°C): 100%-500 A
- Multi-process
- Synergic, pulse
- Suitable for mild steel, stainless steel, aluminum and bronze welding
- Easy connection to Automation & Robotic Systems

Rated input voltage /frequency (V/Hz)	3 phase, AC380V±10%, 50 /60Hz
Rated input capacity (KW)	29
Rated input current(A)	44
Range of welding current(A)	60~500
Range of welding voltage(V)	17~39
OCV(V)	84
Duty cycle (%)	100
Wire diameter (mm)	Ø1.0, Ø1.2, Ø1.6
Gas flow (L/min)	15~20
Dimension (mm)	660x320x560
Weight (kg /lb)	55/121.3
Insulation class	H
Protection class	IP21S

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

6021000118



Inverter

MMA TIG (WIG) 1~ PFC DC +- CC PULSED DIGITAL CE

0,5-500 PULSED **Pulsed (0,5 - 500 Hz) Pulse Function**

LIGHTWEIGHT **Lightweight**

I2 CYLC **Cycle**

Welding Process		TIG	MMA
Input Voltage	V	1 Phase 50/60 Hz, 230 V	
Installed Power	kW	8.5	9.0
Fuse (delayed action)	A	20	20
No Load Voltage	V	88	88
Current Range	A	5-160	5-200
Duty Cycle at (40°C)	%100 %60 %25	120 / 140 / 200	110 / 130 / 160 (%30)
Standards		**EN 60974-1 / EN 60974-3 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		F	
Dimensions (L*W*H)	mm	390 / 135 / 300	
Weight	kg	7.5	

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments				
3021000001	 **1021000001**	 **2020900723**	 **6051900083**	 **1051300003**





Designed for heavy industrial use

Environment friendly (Cos Ø :0.99)

Multi-process

Lightweight

Extra Functions
- 2T/4T Welding operation mode
- Selectable Past Flow time
- Down slope time adjustable
- Multi Purpose (HF TIG/MMA)

Protection Functions
- Thermal Protection
- Overcurrent Protection
- Overvoltage Protection

Design
- Plastic front and rear panels
- Durable metal body

Welding Process		**TIG**	**MMA**
Input Voltage	V	1 Phase 50/60 Hz 220 ± %10	
Installed Power	kW	4,4	7
No Load Voltage	V	66	
Current Range	A	5-200	
Duty Cycle at (40°C)	%100 %60 %50	145 / 180 / 200	135 / 145 / 200 (%30)
Input Voltage		**EN IEC 60974-1 / EN IEC 60974-10**	
Protection Class	IP	21S	
Insulation Class		H	
Dimensions (L*W*H)	mm	420 x 135 x 250	
Weight	kg	9	

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments					
					
3021000058	**1021000037**	**1051900000**	**2020900723**	**1051300003**	**2020900724**





Multi-process

Pulse

Environment friendly (Cos Ø :0.99)

1000 Hz pulse frequency

Lightweight

Extra Functions
MMA
- Arc Force / Hot start

LIFT TIG / HF TIG
- Pre-past gas time / Up slope / Down slope
- Starting current / Ending current
- 2T/4T triggering modes
- Welding capability without deformation on ultra thin surfaces with Pulse Function property.
- AC balance function for Al welding

Protection Functions
- Thermal Protection
- Overcurrent Protection
- Overvoltage Protection

Design
- Plastic front and rear panels
- Durable metal body
- Wireless Remote foot & Fingertip Control Units

Welding Process		TIG	MMA
Input Voltage	V	1 Phase 50/60 Hz 220 ± %10	
Installed Power	kW	7/5,7	4,5/3,9
No Load Voltage	V	67	
Current Range	A	AC/DC 10-200 / 5-200	10-170 / 5-170
Duty Cycle at (40°C)	%100 %60 %35	120 / 150 / 200	120 / 165 / 200
Input Voltage		**EN IEC 60974-1 / EN IEC 60974-10**	
AC Frequency	Hz	50 -200	
Pulse Width Range	(%)	5-95	
Protection Class	IP	21 S	
Insulation Class		H	
Dimensions (L*W*H)	mm	492 x 189 x 350	
Weight	kg	14,5	

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

3021000069



1021000044



6051900083



1051300003



2020900723



60000000430 (Optional)



Multi-process

Pulse

High performance also with cellulosic electrodes

Light weight

Extra Functions
MMA mode
Hot-Start/Arc-Force/Anti-stick (VRD(optional)
HF TIG/Lift-TIG mode
- Pregas time/Postgas time/Up slope-Down slope time/Starting current/Ending current
- 2T/4T/Spot welding
- Base current / Peak current / Pulse duty cycle Pulse frequency

Protection and Design
- Thermalprotection / Overcurrent and Overvoltage protection
- Plastic front and rear panel
- Durable metal body
- Lightweight and portable

Applications

- Industrial applications
- Industrial plants
- Maintenance and repair
- Pipe construction
- Shipbuilding
- Metal construction
- Aerospace industry
- Chemical industry
- Process and food industry

Input Voltage	V	3 Faz, 50/60 Hz, 380 V ±%10
Installed Power	kW	10
Delayed Fuse	A	16,5
No Load Voltage	V	77
Output Voltage Range	V	5-270
Duty Cycle at (40°C)	%100 %35	200 270
Standards		**EN 60974-1 / EN 60974-10:2014**
Protection	IP	21 S
Inslation Class		H
Dimensions (L*W*H)	mm	460 x 210 x 410
Weight	kg	18

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

3021000131



1021000107



6051900083 (Gas Cooled)



2020901327



1051300003



2020900724





Multi-process

Pulse

Durable metal body

Extra Functions

MMA

- Arc Force / Hot start

LIFT TIG / HF TIG

- Pre-past gas time / Up slope / Down slope
- Starting current / Ending current
- 2T/4T triggering modes
- Welding capability without deformation on ultra thin surfaces with Pulse Function property

Protection Functions

- Thermal Protection
- Overcurrent Protection
- Overvoltage Protection

Design

- Plastic front and rear panels
- Durable metal body
- Remote Foot & Fingertip Control Units (Optional)
- Optional trolley and water cooling unit

Welding Process		TIG	MMA
Input Voltage	V	3 Phase 50/60 Hz 380 ± %10	
Installed Power	kW	13,0	15,5
Input Current	A	25,5	31,5
No Load Voltage	V	68	
Welding Current Range	A	5-400	
Duty Cycle at (40°C)	%100 %60	320 / 400	
Standards		**EN IEC 60974-1 / EN IEC 60974-10**	
Protection Class	IP	21 S	
Insulation Class		H	
Dimensions (L*W*H)	mm	530 x 240 x 445	
Weight	kg	20,5	

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments (Gas Cooled)

3021000062

This order code covers the welding machine and all of the equipments (Water Cooled)

3021000063



1021000040



6051900083
(Gas Cooled)



1051300003



2020901327



2020900181
(Optional)



60000000430
(Optional)



2020900724



0,5-2000 Hz (0,5-2000Hz)

ColdTACK ColdTACK

I2 CYLC Cycle

Inverter

MMA TIG (WIG) 1~ PFC DC +- CC PULSED DIGITAL 888 CE VRD

Welding Process		TIG	MMA
Input Voltage	V	1 Phase 50/60 Hz, 230 V	
Installed Power	kW	6.0	6.6
Fuse (delayed action)	A	16	16
No Load Voltage	V	100	100
Current Range	A	5-200	5-180
Duty Cycle at (40°C)	%100 %60 %30	160 / 190 / 220	120 / 150 / 180
Standards		**EN 60974-1 / EN 60974-3 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		HF	
Dimensions (L*W*H)	mm	465 / 185 / 390	
Weight	kg	14	

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments									
3021000104	1021000084	2020900723	6051900083	1051300003	2020900179 (Optional)	6051300053 (Optional)	6051300012 (Optional)	1024300005 (Optional)	2020900724



2000 Hz (0,5-2000Hz)

ColdTACK ColdTACK

I2 CYLC Cycle

Inverter

MMA TIG (WIG) 3~ PULSED CC SYN DIGITAL DC +- CE VRD

Welding Process		TIG	MMA
Input Voltage	V	3 Phase 50/60 Hz, 400 V+ 15/-20%	
Installed Power	kW	9.1	9.8
Fuse (delayed action)	A	10	10
No Load Voltage	V	100	100
Current Range	A	5-300	10-270
Duty Cycle at (40°C)	%100 %60 %30	210 / 250 / 300	200 / 230 / 270
Standards		**EN 60974-1 / EN 60974-3 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		H	
Dimensions (L*W*H)	mm	465 / 185 / 390	
Weight	kg	17.5	

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments **3021000006** Air Cooled **3021000007** Water Cooled	**1021000004**	**6051900083**	**2020901327**	**1051300003**	**1024300004** (Optional)	**2020900179** (Optional)	**6051300053** (Optional)	**6051300012** (Optional)	**2020900724**
									



Inverter

0,5-2000 Hz (0,5-2000Hz)

ColdTACK ColdTACK

I2 CYLC Cycle

MMA TIG (WIG) 3~ PULSED CC SYN DIGITAL AC DC VRD CE

Welding Process		TIG	MMA
Input Voltage	V	3 Phase 50/60 Hz, 400 V ± 20	
Installed Power	kW	9.6	9
Fuse (delayed action)	A	10	32
No Load Voltage	V	100	58
Current Range	A	5-300	10-250
Duty Cycle at (40°C)	%100 %60 %40	210 / 250 / 300	158 / 204 / 250
Standards		**EN 60974-1 / EN 60974-3 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		H	
Dimensions (L*W*H)	mm	465 / 185 / 390	
Weight	kg	19	

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All ofThe Equipments **3021000105** Air Cooled **3021000017** Water Cooled									
									
1021000009	**6051900083**	**2020901327**	**1051300003**	**1024300004** (Optional)	**2020900179** (Optional)	**6051300053** (Optional)	**6051300012** (Optional)	**2020900724**	



2000 Hz (0,5-2000Hz)

ColdTACK ColdTACK

I2 CYLC Cycle

Inverter

MMA TIG (WIG) 3~ PULSED CC SYN DIGITAL 888 DC + - AC DC VRD CE

Welding Process		TIG	MMA
Input Voltage	V	3 Phase 50/60 Hz, 400 V ± %20	
Installed Power	kW	15.3 16	19.9
Fuse (delayed action)	A	65	16
No Load Voltage	V	5-400 250 /	65
Current Range	A	320 / 400	5-400
Duty Cycle at (40°C)	%100 %60 %35		250 / 320 / 400
Standards		**EN 60974-1 / EN 60974-3 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		H	
Dimensions (L*W*H)	mm	640 / 290 / 525	
Weight	kg	49	

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All ofThe Equipments

3021000020 Air Cooled
3021000021 Water Cooled



1021000069



6051900083



2020900649



1051300003



1024300003 (Optional)



2020900179 (Optional)



6051900076 (Optional)



6051300053 (Optional)



6051300012 (Optional)



2020900724



Multi-process

Pulse, double

pulse Vision pipe

Vision ultraspeed

Vision cold

Vision power

Welding Process		4000	5000
Input Voltage	V	3 Phase, 50/60 Hz, 400 ± 20 V	
Installed Power	kW	25.5 30	32
Fuse (delayed action)	A	70	40
No Load Voltage	V	10-400 330 /	70
Current Range	A	370 / 400	10-500
Duty Cycle at (40°C)	%100 %60 %50		380 / 460 / 500
Standards		**EN 60974-1 / EN 60974-5 / EN 60974-10**	
Protection Class	IP	23	
Insulation Class		H	
Usable Wire Diameters	Ø mm	0.6 - 1.6	
Dimensions (L*W*H)	mm	660 / 290 / 515	660 / 290 / 515
Weight	kg	40	44

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments	This Order Code Covers The Welding Machine and All of The Equipments										
3021000051 4000 A	**3021000052** 5000 A	 **1021000029** 4000 A	 **1021000030** 5000 A	 **2020900649**	 **1051300003**	 **1024300003**	 **2020900877**	 **2020900176**	 **1024400001**	 **1051900012**	 **2020900724**



Heavy duty cycle (>90% at max. Current)

Max. cutting: 30 mm

Clean cut: 15 mm

PLASMA | 3 Phase 50/60Hz | CNC | CE

Heavy Duty Cycle
- More than %90 at maximum current
- Suitable to work under ± %10 voltage fluctuations

Protection Functions
- Thermal Protection
- Overcurrent Protection
- Alarms for Protections

Pilot Arc Control System
- Increases cutting capabilities and speed
- Extends tip's life
- Decreasing of torch grid consumption

Design
- Plastic front panel
- Impact resistive metal body
- Connectable to CNC systems

Input Voltage	V	3 Phase, 50/60 Hz, 380 V ±%10
Installed Power	kW	7,8
Delayed Fuse	A	18
No Load Voltage	V	450
Welding Current Range	A	20-65
Cutting Capacity	mm	Max. Cutting: 30 / Clean Cut : 15
Duty Cycle at (40°C)	%100 %90	65 / 68
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	640 x 240 x 445
Weight	kg	24

Standard & Optional Equipments

This order code covers the welding machine and all of the equipments			
3021000102	**1021000066**	**2020900649**	**1051900027**



Duty cycle (40°C): 100%-100 A

Max. Cutting: 50 mm

Clean cut: 20 mm

PLASMA | CNC | 3 Phase 50/60Hz | PLP safe | 888 Display | CE

Pilot Arc Controller
- Working for a long time with 100% operating performance
- Increases cutting capabilities and speed
- Extends tip's life
- Decreasing of torch grid consumption
- Suitable to work under ± % 10 voltage fluctuations

Protection Functions
- Thermal Protection
- Overcurrent Protection
- Alarms for Protections

Design
- Plastic front panel
- Impact resistive metal body
- Connectable to CNC systems

Input Voltage	V	3 Phase, 50/60 Hz, 380 V ±%10
Installed Power	kW	19
Current Range	A	20-100
Cutting Capacity	mm	Max. Cutting: 50 / Clean Cut : 20
Duty Cycle at (40°C)	%100	100
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	640 x 240 x 445
Weight	kg	23

Standard & Optional Equipments

This order code covers the welding machine and all of the equipments

3021000103



1021000067



2020900649



1051900026



Inverter

PLASMA 3~ DC + -

CC CE

Maximum Cutting
50 mm: Structural Steel
40 mm: Stainless, Aluminum

Clean Cut
40 mm: Structural Steel
30 mm: Stainless, Aluminum

Input Voltage	V	3 Phase 50/60 Hz, 400 V, ± 10
Installed Power	kW	27.5
Fuse (delayed action)	A	30
Current Range	A	25-150
Cutting Capacity	mm	Severence: 50 / Quality: 40
Duty Cycle at (40°C)	100% 60% 30%	100 / 120 / 150
Standards		**EN 60974-1 / IEC 60974-3 / EN 60974-7 / EN 60974-10**
Protection Class	IP	23
Insulation Class		H
Dimensions (L*W*H)	mm	730 / 290 / 515
Weight	kg	49

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments			
3021000106	**1021000036**	**1051900028**	**2020900649**



Stainless Steel Maximum Cut: 10 Stainless Steel Minimum Cut: 4

Alüminyum Maksimum: 8 Alüminyum Minimum: 4

Multivoltage

Usage Areas

- Maintenance and Repair Applications
- Industrial facilities
- Steel construction
- Automotive Industry

Input Voltage	V	1 Faz 50/60 Hz 110-230V ± %10
Installed Power	kW	4,9
Rayed Input Current	A	22,6
No Load Voltage	V	210
Welding Current Range	A	20-40
Cutting Capacity	mm	Max.: 12 / Clean Cut : 5
Duty Cycle	40°	%100 - 30 / %50 - 40
Standards		**EN IEC 60974-1 / EN IEC 60974-10**
Protection	IP	21 S
Isolation Class		F
Dimensions	mm	510 x 146 x 278
Weight	kg	9

STANDARD & OPTIONAL EQUIPMENTS

This order code covers the welding machine and all of the equipments

3021000134



1021000106



2020900841



1051900059





Designed for heavy industrial use

MMA and gouging

Duty cycle (40°C): 100%-1000 A

Modu
- LIFT-TIG
- MMA Welding

Extra Functions
- Hot Start
- Arc Force
- Wire Diameter Selection. CC / CV Selection
- Inductance Setting



Input Voltage	V	3 Phase, 50/60 Hz, 380 V ±%15
Installed Power	kW	55
Input Current	A	83
No Load Voltage	V	84
Current Range	A	60-1000
Duty Cycle at (40°C)	%100	1000
Standards		**EN IEC 60974-1 / EN 60974-10**
Protection Class	IP	21S
Insulation Class		H
Dimensions (L*W*H)	mm	788 x 366 x 815
Weight	kg	95

STANDARD & OPTIONAL EQUIPMENTS

This Order Code Covers The Welding Machine and All of The Equipments
3021000099


1021000063


1020900004


1020900005


2020900686


6051900107
(Optional)


2020900879


105180000
15 mt


1000900188
10 mt



3 I Welding / cutting / cleaning

7 MODE 7 Different welding modes

Compact

- Eco-Friendly Laser Welding Technology with Low Energy Consumption
- High Welding Efficiency
- Perfect Welding Joints

Starlet Laser H-1000 / Starlet Laser H-1500 / Starlet Laser H-2000

6kW • 8kW • 10kW	*Handheld*
Laser Power	*1000W/1kW • 1500W/1,5kW • 2000W/2kW*
Laser Welding Type	*Fiber*
Size Of Light Beam	*0.2-5mm*
Welding Penetration	*5mm • 7mm • 10mm*
Laser Wavelength	*1080nm*
Pulse Width	*10ms*
Max Energy Used	*6kW • 8kW • 10kW*
Cooling Type	*Water Cooling (Internal)*
Fiber Cable Length	*8m*
Wire Feeder System	*Internal*
Transformer System	*Internal*
Cleaning	*Max. 5mm*
Cutting	*Max. 6mm*



3 I **Welding / cutting / cleaning**

7 MODE **7 Different welding modes**

Starlet Laser P-1500 / Starlet Laser P-2000 / Starlet Laser P-3000

Machine Type	*Hand Type*
Laser Power	*1500W/1,5kW • 1000W/1kW • 2000W/2kW*
Laser Welding Type	*Fiber*
Point Size	*0.2-5mm*
Resource Influence	*7mm*
Laser Wavelength	*1080nm*
Pulse Width	*≤10ms*
Max Energy Used	*8kW • 10kW • 10kW*
Cooling Type	*Water Cooling (Internal)*
Fiber Cable Length	*8mt*
Wire Feeding System	*Internal*
Transformer System	*Internal*
Cleaning Feature	*Max. 5mm*
Cutting Feature	*Max. 1,5mm • Max. 3mm • Max. 8mm*



3 I Welding / cutting / cleaning

Starlet Laser E- 1500 / Starlet Laser E- 2000 / Starlet Laser E- 3000

Machine Type	*Hand Type*
Laser Power	*1500W/1,5kW - 2000W/2kW - 30000W / 3kW*
Laser Welding Type	*Fiber*
Point Size	*0.2-5mm*
Laser Wavelength	*1080nm*
Pulse Width	*10ms*
Max Energy Used	*10 kW*
Cooling Type	*Water Cooling (Internal)*
Fiber Cable Length	*8mt*
Wire Feeding System	*Outside*
Cleaning Feature	*Max. 5mm*
Cutting Feature	*Max. 1.5mm*



3 I Welding / cutting / cleaning

Starlet Laser M-1500 / Starlet Laser M-2000

Machine Type	Handheld
Laser Power	***1500W/1,5kW - 2000W/2kW - 30000W / 3kW***
Laser Welding Type	Fiber
Point Size	0-5 MM
Laser Wave Length	1080 ±5 NM
Modulation Frequency	1-5000 Hz
Beam Quality(M2)	≤1.8
Working Woltage	220 VAC
Pulse Width	≤10MS
Max Used Energy	8KW
Cooling Type	Water Cooling(Internal)
Fiber Cable Length	10MT
Wire Feeder System	External
Cleaning Feature	Yes (By Changing Lenses)
Warranty Period	1 Years