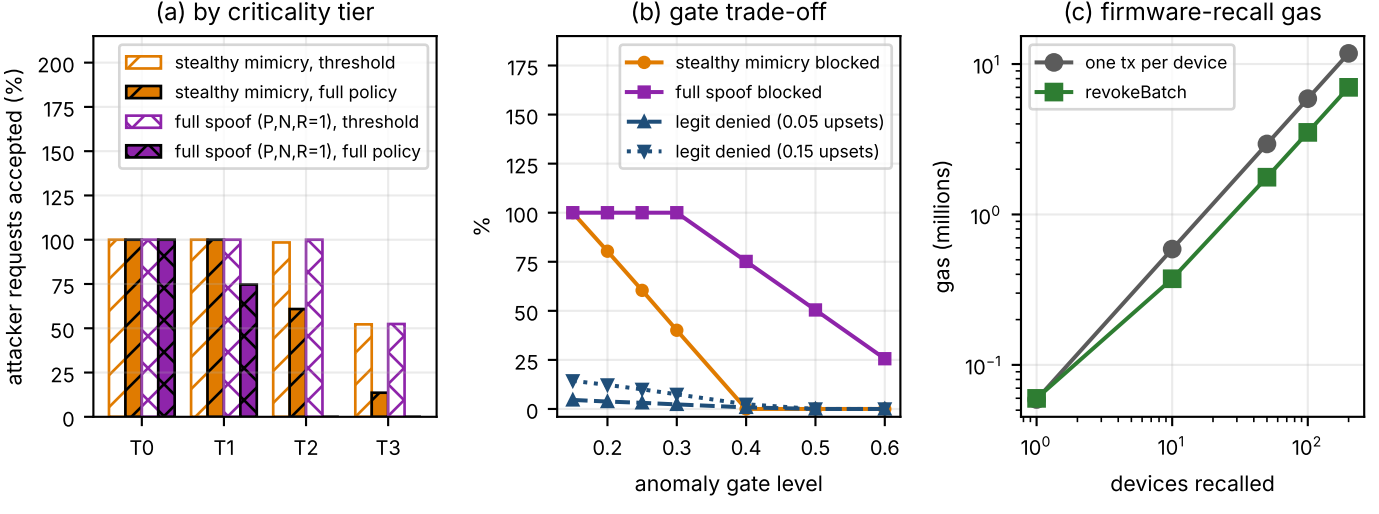
(a) by criticality tier
attacker requests accepted (%)
stealthy mimicry, threshold
stealthy mimicry, full policy
full spoof (P,N,R=1), threshold
full spoof (P,N,R=1), full policy
T0
T1
T2
T3
(b) gate trade-off
%
stealthy mimicry blocked
full spoof blocked
legit denied (0.05 upsets)
legit denied (0.15 upsets)
anomaly gate level
(c) firmware-recall gas
gas (millions)
one tx per device
revokeBatch
devices recalled