LONGWELL
DD7-5 EC Centrifugal Fan

LWDD7-5-EC | PRODUCT DATA SUMMARY

A direct-drive centrifugal blower with a 200 W EC motor and 0-10 V / PWM speed control. Use the model code, dimension drawing and operating-point table together when selecting the fan.

220 V / 50 Hz
Up to 1,400 m³/h at 0 Pa static pressure




Electrical & operating specifications

Motor technology	EC (electronically commutated)
Motor power	200 W
Supply	220 V / 50 Hz
Speed control	0-10 V / PWM signal
Catalogue reference speed	1,440 ± 10 rpm
Published test speeds	1,200-1,450 rpm, depending on operating point
Max. published airflow	1,400 m³/h at 0 Pa static pressure
Published airflow range	852-1,400 m³/h
Static pressure range	0-280 Pa over the published operating points
Total pressure range	65-304 Pa over the published operating points
Published noise readings	59.9-60.3 dB(A); measurement conditions not stated
Rotation	Clockwise, viewed from the rotor
Protection rating	IP55, as stated by the manufacturer
Insulation class	F
Bearings	NMB ball bearings
Mounting orientation	Unrestricted orientation stated by manufacturer; check installation clearances

Dimensions & mounting

LWDD7-5-EC | All drawing dimensions in millimetres

Product Drawing

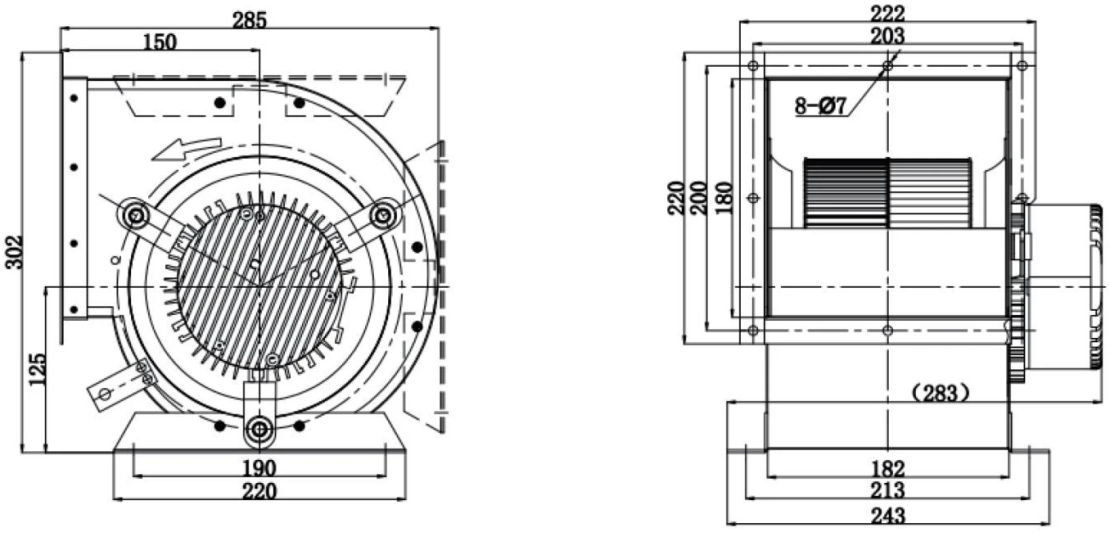

Overall height	302 mm
Side-view overall length	285 mm
Overall width including motor	(283) mm - reference dimension on drawing
Outlet flange	222 × 220 mm
Outlet fixing centres	203 × 200 mm
Outlet fixing holes	8 × Ø7 mm
Base dimensions shown	220 mm in side view; 243 mm in front view


Before specifying the installation

Check the available space, inlet clearance, outlet connection, mounting points and access for service. The flange size is not the clear air opening. The width (283) is a reference dimension as shown on the original drawing.

Obtain model-specific wiring and installation instructions before connection. Confirm controller compatibility, accessories and suitability for the air being moved. The published page does not provide current, net weight, temperature limits or terminal assignments.

Performance reference

Nine operating points published by LONGWELL for LWDD7-5-EC.

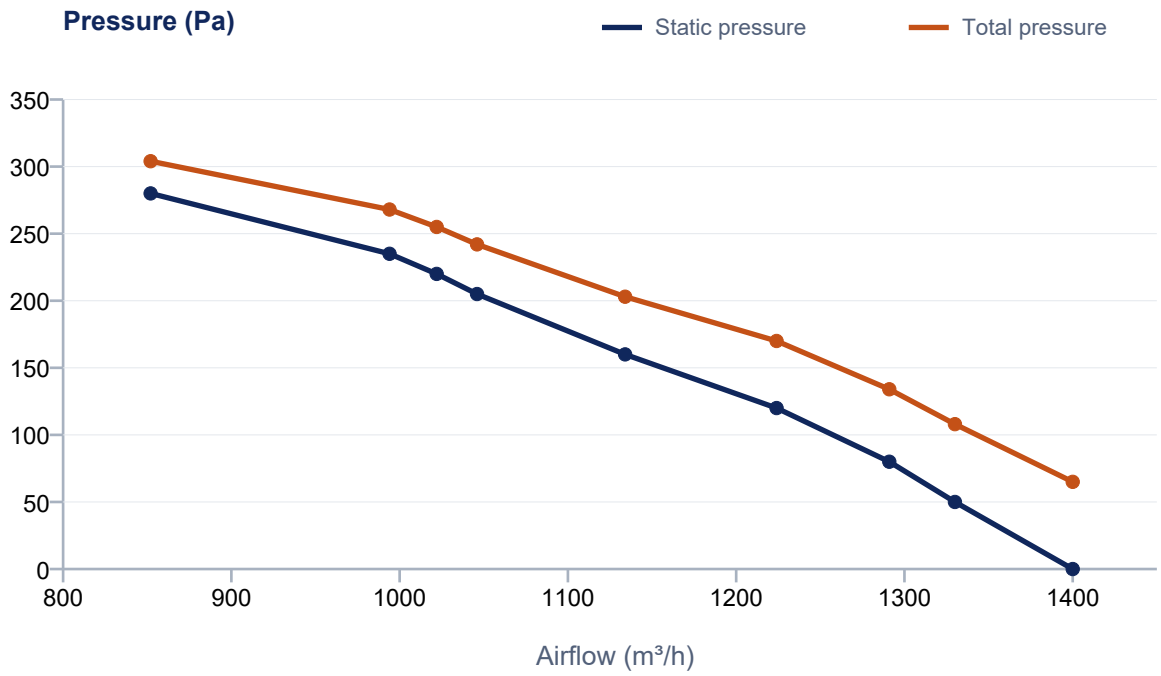

Airflow (m³/h)	Static pressure (Pa)	Total pressure (Pa)	Speed (rpm)	Noise (dB(A))
852	280	304	1450	60.0
994	235	268	1440	59.9
1022	220	255	1430	60.0
1046	205	242	1430	59.9
1134	160	203	1410	60.1
1224	120	170	1370	60.1
1291	80	134	1300	60.2
1330	50	108	1250	60.2
1400	0	65	1200	60.3

Lines connect the published points and do not represent additional tests. The test speeds vary from 1,200 to 1,450 rpm; the catalogue reference is 1,440 ± 10 rpm. At 1,400 m³/h, static pressure is 0 Pa and total pressure is 65 Pa. Noise measurement conditions are not stated.

Source: LONGWELL manufacturer product page, reviewed 20 October 2026. Original product photographs and dimension drawing: LONGWELL. Chart redrawn from the published numerical table.

Prepared by Midia M Metal as a reference summary, not an installation manual. Confirm availability, package contents, delivery and applicable warranty separately. Manufacturer ratings are not independent test results or a seller performance guarantee.