



Known switch at 28 s: braking supplies delay, acceleration preserves speed at green


(a) Speed: delay first, then recover

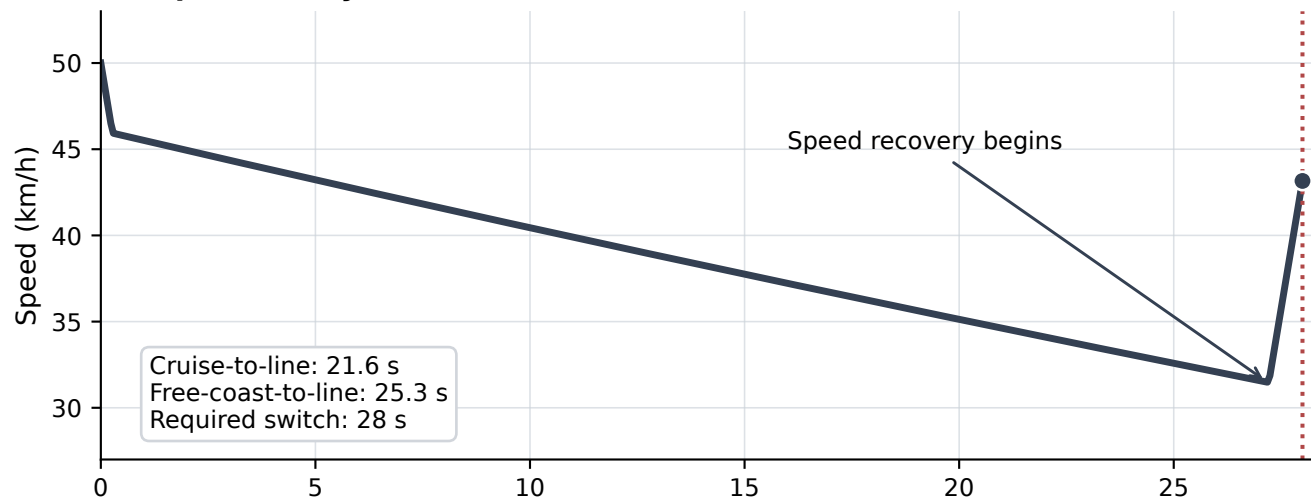

(b) Brake-coast-accelerate control

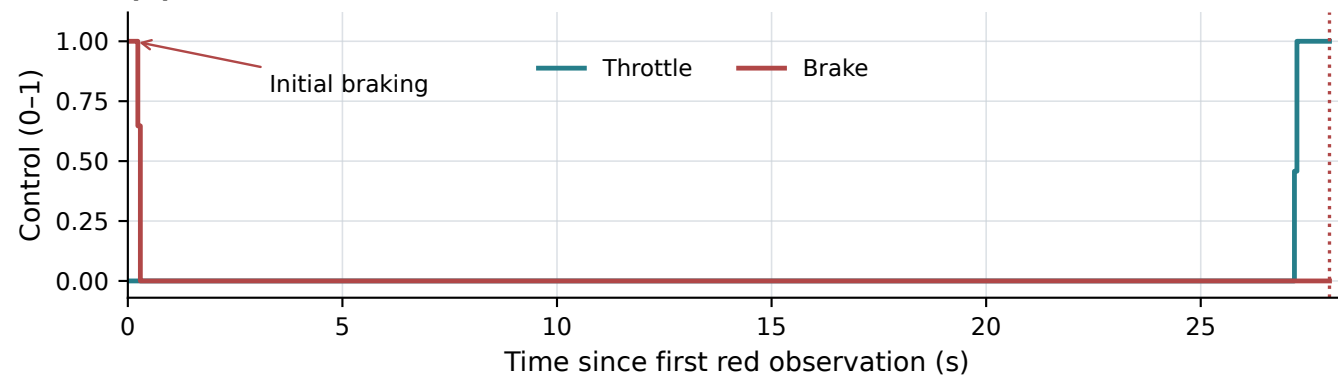


(c) Recovery near the stop line

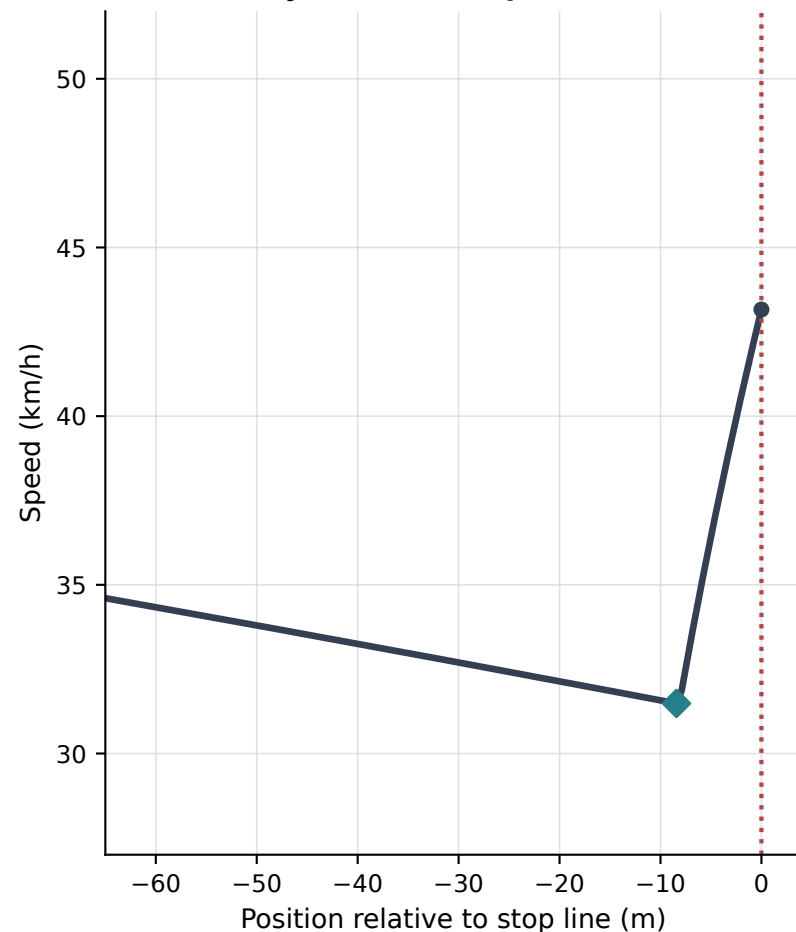


Same realized green at 28 s: information changes when delay is created

(a) Broad prior $S \sim U(0, 60)$

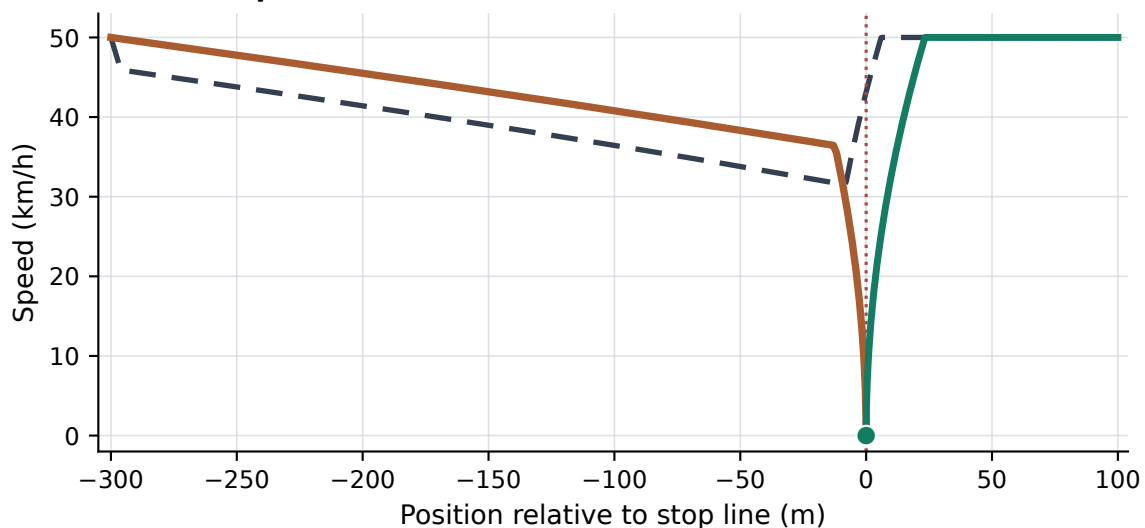


(b) Late prior $S \sim U(26, 30)$

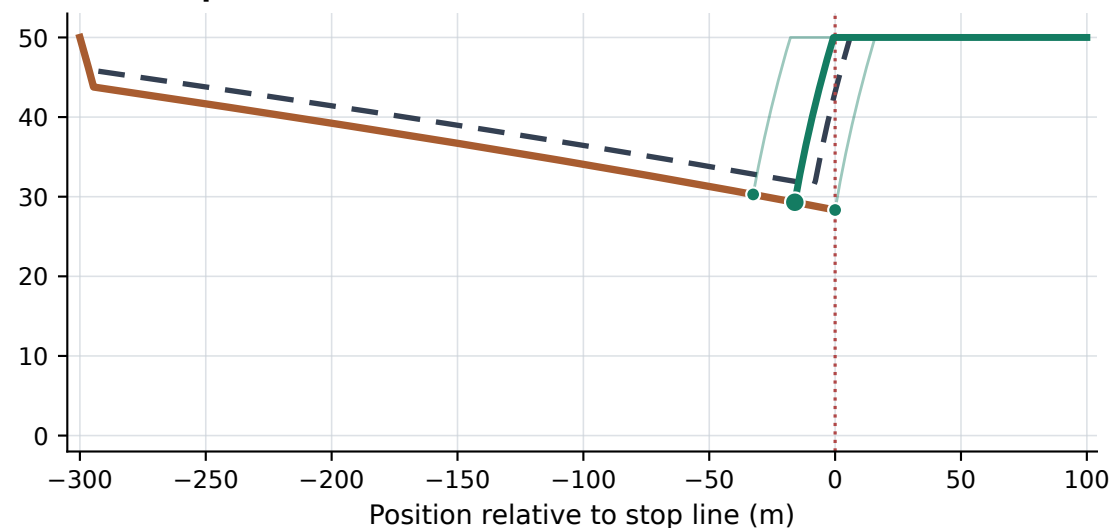


Early green possible; late red may continue

Stop and wait if red persists

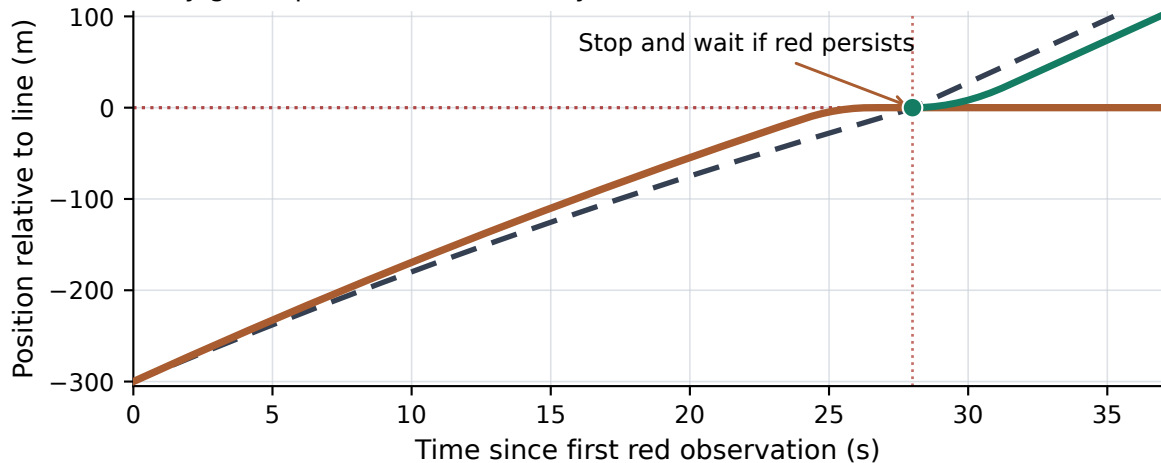


Delay required; approach remains rolling

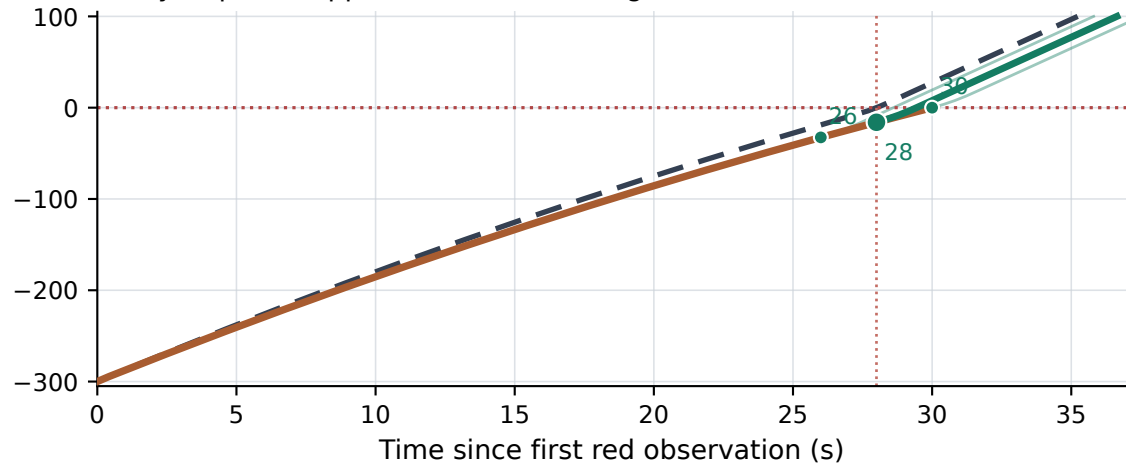


— Known $S = 28$ s — Common red-conditional policy —●— Green observed; $S = 28$ emphasized

Acceleration before green is possible, $S \sim U(27, 27.5)$ s; time value 900 CZK/h

(a) Speed before and during uncertain green window

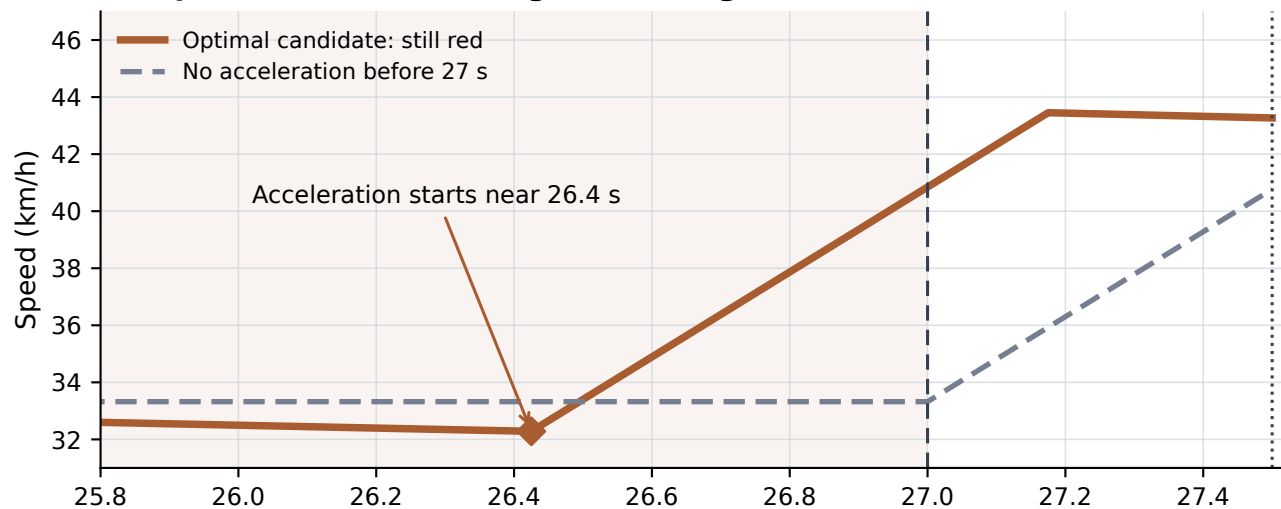


(b) Control: before-27 s restriction only

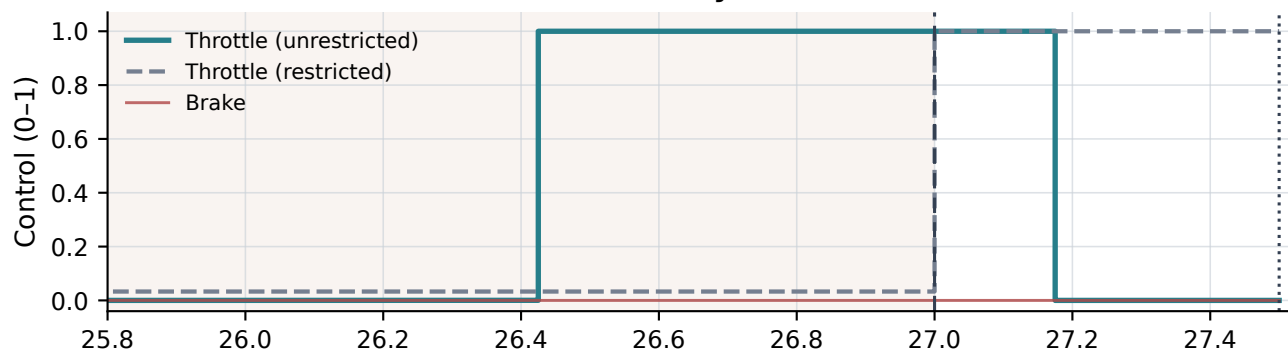

Time since first red observation (s)


Expected cost: unrestricted 9.400223 CZK; no acceleration before 27 s 9.410469 CZK; benefit 0.010246 CZK.

(c) Multiple possible green continuations

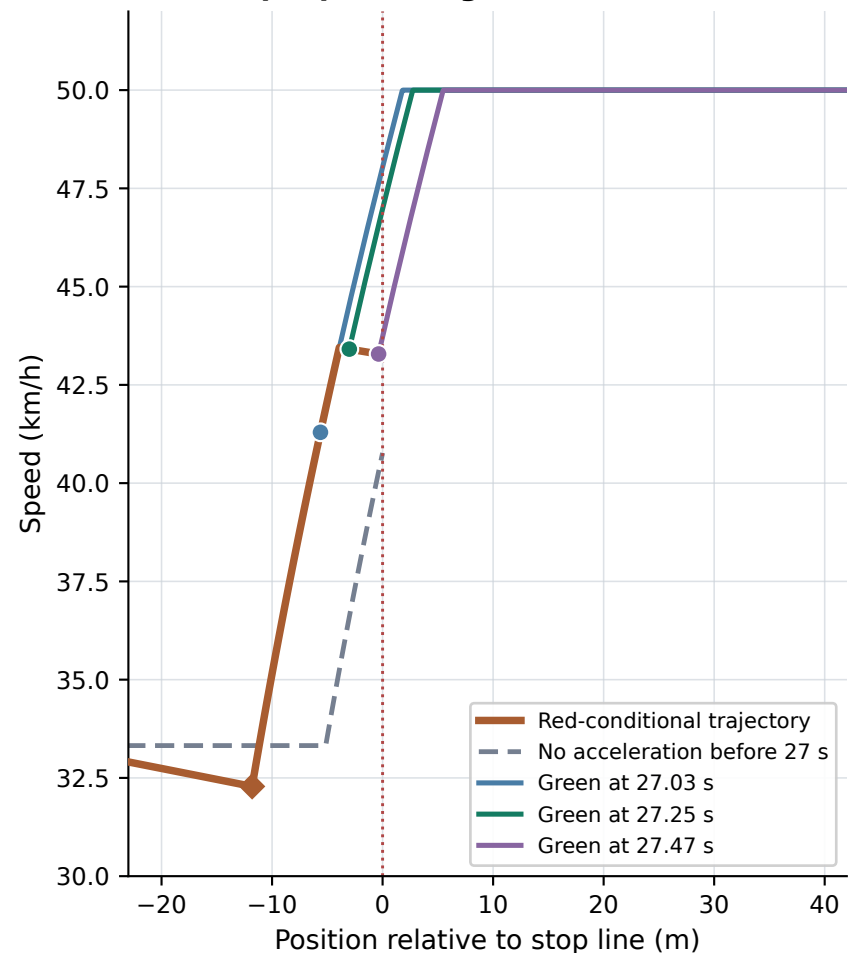


Value of switch-time information: realized regret and prior-weighted average

(a) Broad prior: $U(0, 60)$

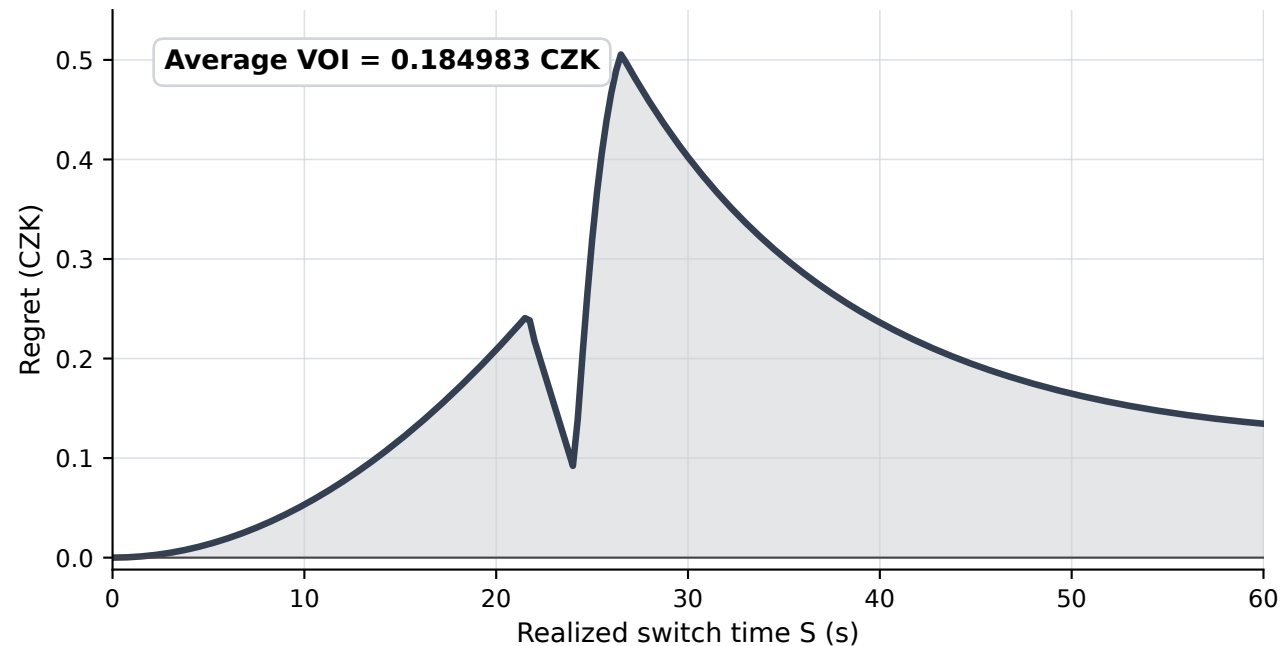

(b) Late prior: $U(26, 30)$

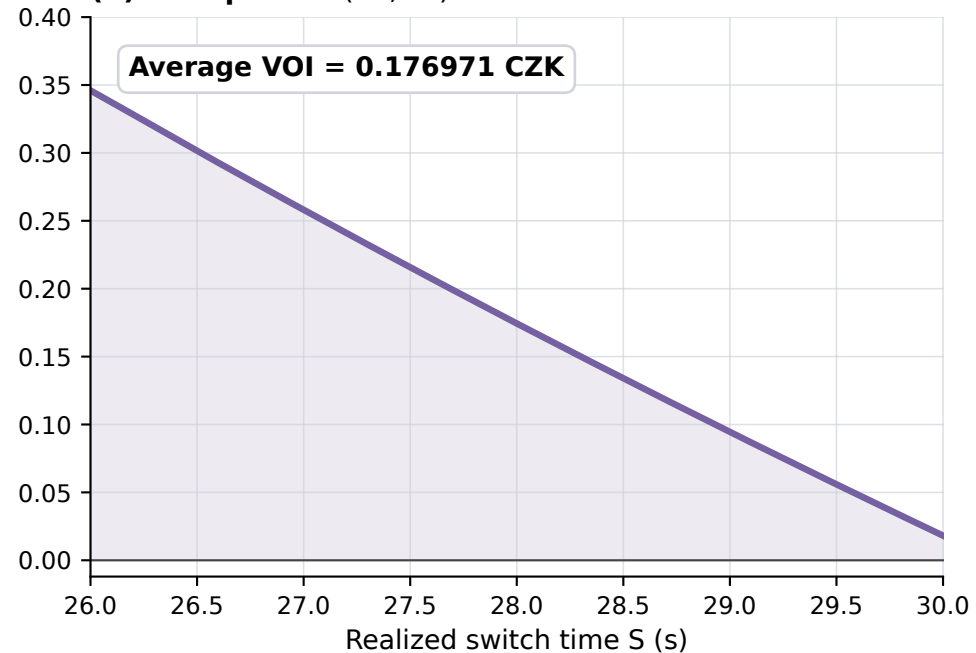

$$R(s) = J_{\text{feedback}}(s) - J_{\text{known}}^*(s); \text{ shaded area / prior-support width gives average regret (VOI).}$$