

Matthew
Egder

COURSE: CHE 312: Transport Phenomena II

Spring Semester 2020

Department of Chemical Engineering

University of Illinois at Chicago

Midsemester Exam #2

Only one sheet of paper 5 x 7 is allowed

Duration: 55 minutes --- March 9, 2020

69
+5


65
125

Problem 1: (50 points)

A slab of ice in a container of dimensions L , L , and H is placed on a well-insulated pad. At its top surface, initially the ice is exposed to ambient air for which $T_\infty = 25^\circ\text{C}$ and the convection coefficient is $25 \text{ W/m}^2\cdot\text{K}$. The ice is melting and the water formed acts as an additional resistance to the heat transfer. Assume that there is no storage of energy in the water being formed and that the water temperature profile is linear. The ice temperature remains at 0°C and $H = 10 \text{ mm}$. If the density and latent heat of fusion of ice are 920 kg/m^3 and 334 kJ/kg , respectively, and the thermal conductivity of water is $0.5 \text{ W/m}\cdot\text{K}$, then:


- By performing energy balance(s) over appropriate control element(s) determine the position of the water/ice interface as a function of time.
- Determine the time required for the ice to melt. How does this relate to the time found in the case of no water-layer resistance?

Bonus: (25 points) Determine how the water-air interface temperature, T_{wa} , changes with time. What is the value of T_{wa} when the ice has melted?

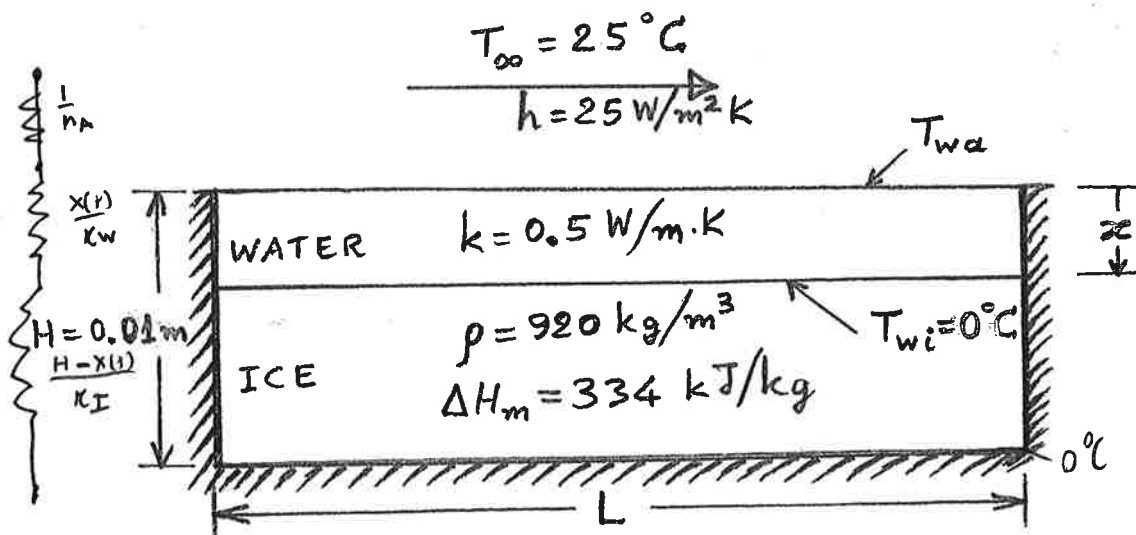

$$k_w = .5 \frac{W}{mK}$$

$$h_a = 25 \frac{W}{mK}$$

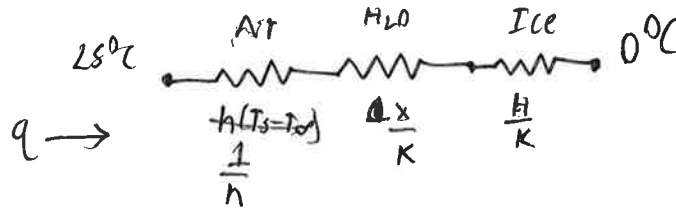

$$\frac{0-25}{\frac{1}{h} + \frac{x(t)}{k_w} + \frac{H}{k_{ice}}} = q$$

A) Use left side equals expression for q dependant on time. solve for $x(t)$ which is position as a function of time.

B) Set $x(t) = H = .02m$ and solve for time. it would be a longer time considering the water layer resistance because the water layer insulated the block.

$$q = \rho V_c \frac{dT}{dt}$$

$$q = h(T_s - T_w)$$

$$\frac{0 - T_{wa}}{\frac{x(t)}{k_w} + \frac{H - x(t)}{k_{ice}}} = \rho V_c \frac{dT_{wa}}{dt}$$

$$\Delta T_m = 33.9 \frac{K}{s} \cdot 920 \frac{kg}{m^3} = 307,208 \frac{kg}{m^3}$$

$$V_w = x(t) L^2$$

Energy released from ice to water

$$q = x(t) L^2 \cdot 307,208 \frac{kg}{m^3}$$

$$\frac{W}{m} = \frac{0-25}{\frac{1}{25} + \frac{x(t)}{.5}} = x(t) L^2 307,208$$

$$x(t) = H - x_+$$

$$-25 = (H - x_+) L^2 307,208 \left[\frac{1}{25} + \frac{H - x_+}{.5} \right]$$

$$-25 = (.02 - x_+) L^2 307,208 \left[.06 + \frac{-x_+}{.5} \right]$$

$$-25 = (.02 - x_+) L^2 9216.24 - (.02 - x_+) L^2 307208 x_+$$

$$-12.5 = (.02 - x_+) L^2 [9216.24 - 307208 x_+]$$

$$-12.5 = (.02 - x_+) [9216.24 - 307208 x_+]$$

$$-12.5 = 92.1624 - 307208 x_+ - 9216.24 x_+ + 307208 x_+^2$$

Bonus $T_{wa} = 25^\circ C$ because eventually the water will heat up to the temp of the air after it melts.


Problem 2: (75 points)

A fluid at 100°C is to be cooled by a different stream of the same fluid at 20°C . A heat exchanger is available for parallel or counter flow. When the heat exchanger is used with parallel flow, the outlet temperature of the hot stream is 65°C . If the mass flow rates in the hot and cold streams are equal to each other and the heat capacity of the fluid is temperature independent, determine:


(a) (30 points) The outlet temperature of the cold stream with parallel flow in the heat exchanger, and

(b) (45 points) The outlet temperatures of the cold and hot streams when a counter flow set up is used.

A) $q_h = C_H (100 - 65)$ $q_c = C_C (20 - T_{co})$
 $C_H (35) = C_C (20 + T_{co})$ $C_C = C_H$
 $35 = -20 + T_{co}$ $T_{co} = 55^\circ\text{C}$



30



$$C_r = \frac{C_H}{C_C} = 1$$

$$T_{c,p} = ?$$

$$T_{h,p} = ?$$

$$q_h = C_H (100 - T_{ho})$$

$$q_c = C_C (T_{co} - 20)$$

$$100 + 20 = 2 T_{co}$$

$$T_{co} = 60^\circ\text{C}$$

$$\epsilon = \frac{1 - \exp[-NTU(1-r)]}{1 - r \exp[-NTU(1-r)]}$$

$$\epsilon = 1$$

$$\frac{q}{q_{max}} = 1$$

$$q = q_{max}$$

$$T_{ho} = T_{co}$$

15 + 5

NOT NECESSARILY NEEDED

TABLE 11.3 Heat exchanger effectiveness relations [5]

Flow Arrangement	Relation
Parallel flow	$\varepsilon = \frac{1 - \exp[-NTU(1 + C_r)]}{1 + C_r} \quad (11.28a)$
Counterflow	$\varepsilon = \frac{1 - \exp[-NTU(1 - C_r)]}{1 - C_r \exp[-NTU(1 - C_r)]} \quad (C_r < 1)$
	$\varepsilon = \frac{NTU}{1 + NTU} \quad (C_r = 1) \quad (11.29a)$
Shell-and-tube	
One shell pass (2, 4, ... tube passes)	$\varepsilon_1 = 2 \left\{ 1 + C_r + (1 + C_r^2)^{1/2} \times \frac{1 + \exp[-(NTU)_1(1 + C_r^2)^{1/2}]}{1 - \exp[-(NTU)_1(1 + C_r^2)^{1/2}]} \right\}^{-1} \quad (11.30a)$
n shell passes ($2n, 4n, \dots$ tube passes)	$\varepsilon = \left[\left(\frac{1 - \varepsilon_1 C_r}{1 - \varepsilon_1} \right)^n - 1 \right] \left[\left(\frac{1 - \varepsilon_1 C_r}{1 - \varepsilon_1} \right)^n - C_r \right]^{-1} \quad (11.31a)$
Cross-flow (single pass)	
Both fluids unmixed	$\varepsilon = 1 - \exp \left[\left(\frac{1}{C_r} \right) (NTU)^{0.22} \{ \exp[-C_r (NTU)^{0.78}] - 1 \} \right] \quad (11.32)$
$C_{\max}$ (mixed), $C_{\min}$ (unmixed)	$\varepsilon = \left(\frac{1}{C_r} \right) (1 - \exp \{ -C_r [1 - \exp(-NTU)] \}) \quad (11.33a)$
$C_{\min}$ (mixed), $C_{\max}$ (unmixed)	$\varepsilon = 1 - \exp \{ -C_r^{-1} [1 - \exp \{ -C_r (NTU) \}] \} \quad (11.34a)$
All exchangers ($C_r = 0$)	$\varepsilon = 1 - \exp(-NTU) \quad (11.35a)$

TABLE 11.4 Heat exchanger NTU relations

Flow Arrangement	Relation
Parallel flow	$NTU = -\frac{\ln[1 - \varepsilon(1 + C_r)]}{1 + C_r} \quad (11.28b)$
Counterflow	$NTU = \frac{1}{C_r - 1} \ln \left(\frac{\varepsilon - 1}{\varepsilon C_r - 1} \right) \quad (C_r < 1)$
	$NTU = \frac{\varepsilon}{1 - \varepsilon} \quad (C_r = 1) \quad (11.29b)$
Shell-and-tube	
One shell pass (2, 4, ... tube passes)	$(NTU)_1 = -(1 + C_r^2)^{-1/2} \ln \left(\frac{E - 1}{E + 1} \right) \quad (11.30b)$
	$E = \frac{2/\varepsilon_1 - (1 + C_r)}{(1 + C_r^2)^{1/2}} \quad (11.30c)$
n shell passes ($2n, 4n, \dots$ tube passes)	Use Equations 11.30b and 11.30c with $\varepsilon_1 = \frac{F - 1}{F - C_r} \quad F = \left(\frac{\varepsilon C_r - 1}{\varepsilon - 1} \right)^{1/n} \quad NTU = n(NTU)_1 \quad (11.31b, c, d)$
Cross-flow (single pass)	
$C_{\max}$ (mixed), $C_{\min}$ (unmixed)	$NTU = -\ln \left[1 + \left(\frac{1}{C_r} \right) \ln(1 - \varepsilon C_r) \right] \quad (11.33b)$
$C_{\min}$ (mixed), $C_{\max}$ (unmixed)	$NTU = -\left(\frac{1}{C_r} \right) \ln [C_r \ln(1 - \varepsilon) + 1] \quad (11.34b)$
All exchangers ($C_r = 0$)	$NTU = -\ln(1 - \varepsilon) \quad (11.35b)$

