
# Qwen3.6-35B-A3B — BF16 vs Q4_0 vs Q4_0 + Expert BitNet
## Speedup ratios: Q4_0 / BF16; Section 12 hybrid / Q4_0 (not BF16)

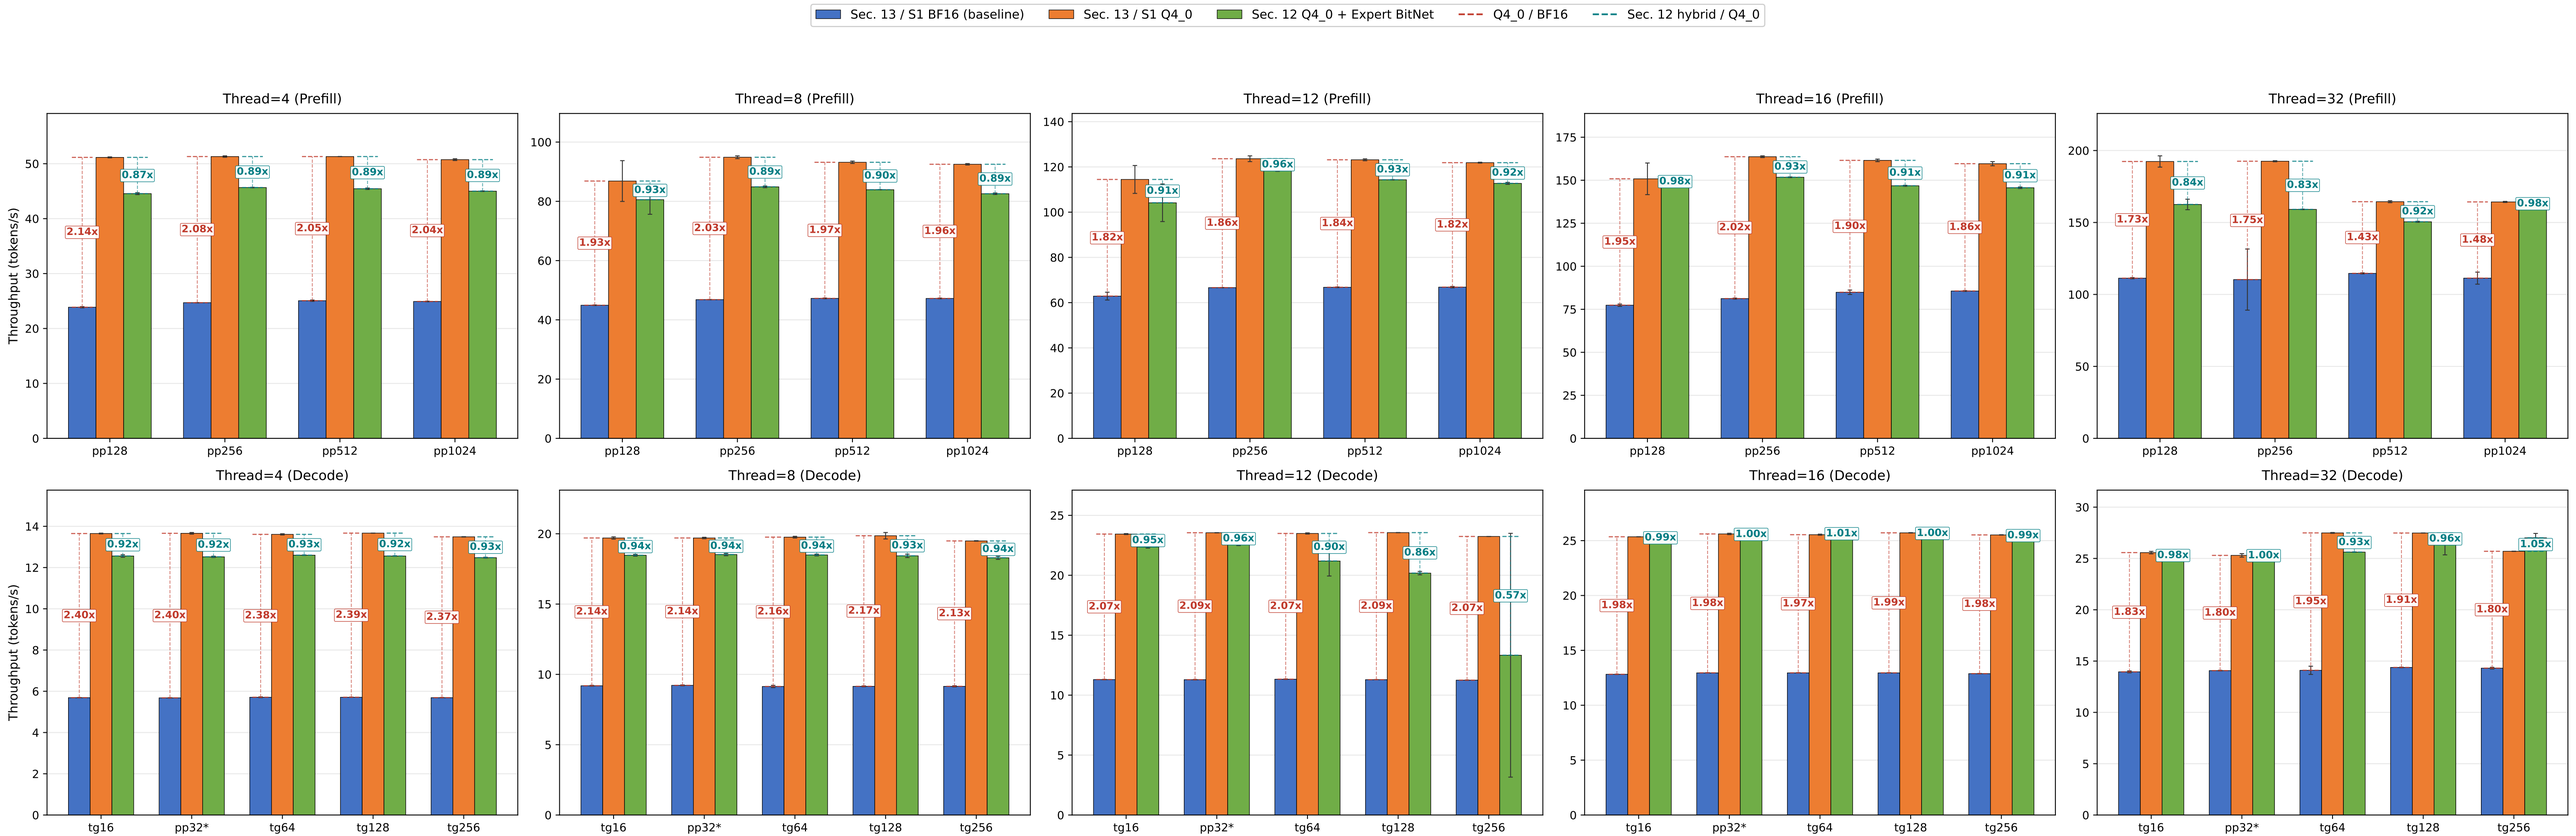


Sec. 12 hybrid label follows the requested setup description; its PDF table heading says Q4_0. S1: no MTP, TL2 off. Identical benchmark conditions are not established by the PDF.
Source: benchmark PDF (7), Sec. 12 pp. 19-20; Sec. 13 pp. 21-22. BF16 is the original baseline (table heading: F16.GGUF; conversion: --outtype bf16).
Error bars: reported ± values. Ratios use measured means at the same task/thread count; hybrid ratios use Q4_0 as baseline. Values below 1.00x indicate lower throughput.
Threads 1/2: no data. pp32*: source label retained, grouped with Decode by table position. S1 Q4_0 tg16 / Thread=16: measured 25.35 tokens/s, not the expected 43.
High-variability measurement retained: Sec. 12 hybrid tg256 / Thread=12 = 13.33 ± 10.17 tokens/s (0.57x Q4_0); do not interpret this mean ratio as a stable slowdown.