
Qwen3.6-35B-A3B — S1 vs S2 vs S4 Throughput (tokens/s)
Speedup ratios: S1 Q4_0 / S1 BF16; S2 / S1 BF16; S4 / S2 (not S1)

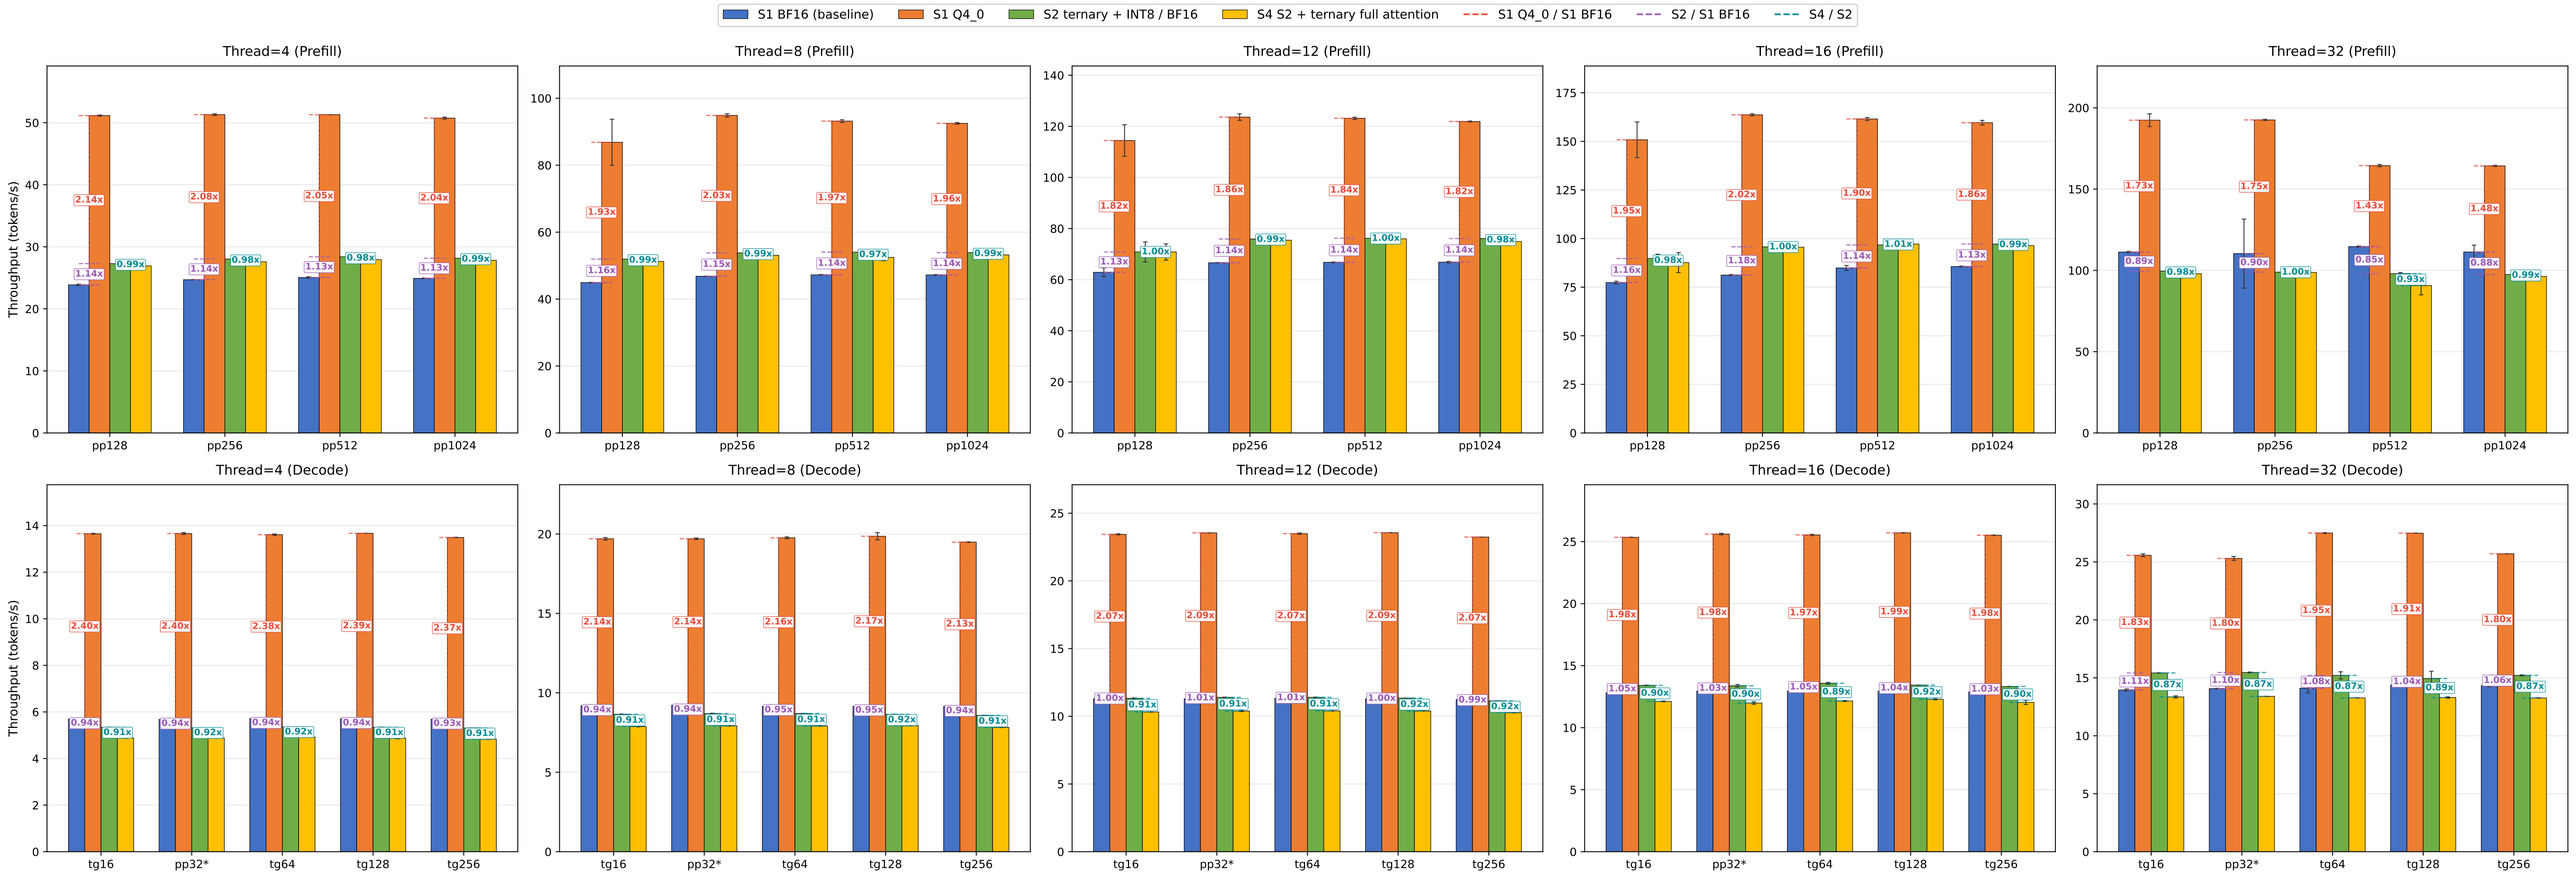

S2: routed experts ternary; embedding + output head INT8; other main projections BF16. S4: S2 + W2A16 full-attention Q/K/V/O (including Q gate rows); shared experts/GDN remain BF16.

S1: no MTP, TL2 off. Error bars: reported ± values; ratios use measured means. S4 ratios use S2 as the baseline, NOT S1.

Threads 1/2: no data. pp32*: source label retained, shown with Decode rows by its table position. S1 Q4_0 tg16 / Thread=16: measured 25.35 tokens/s (not the expected 43).