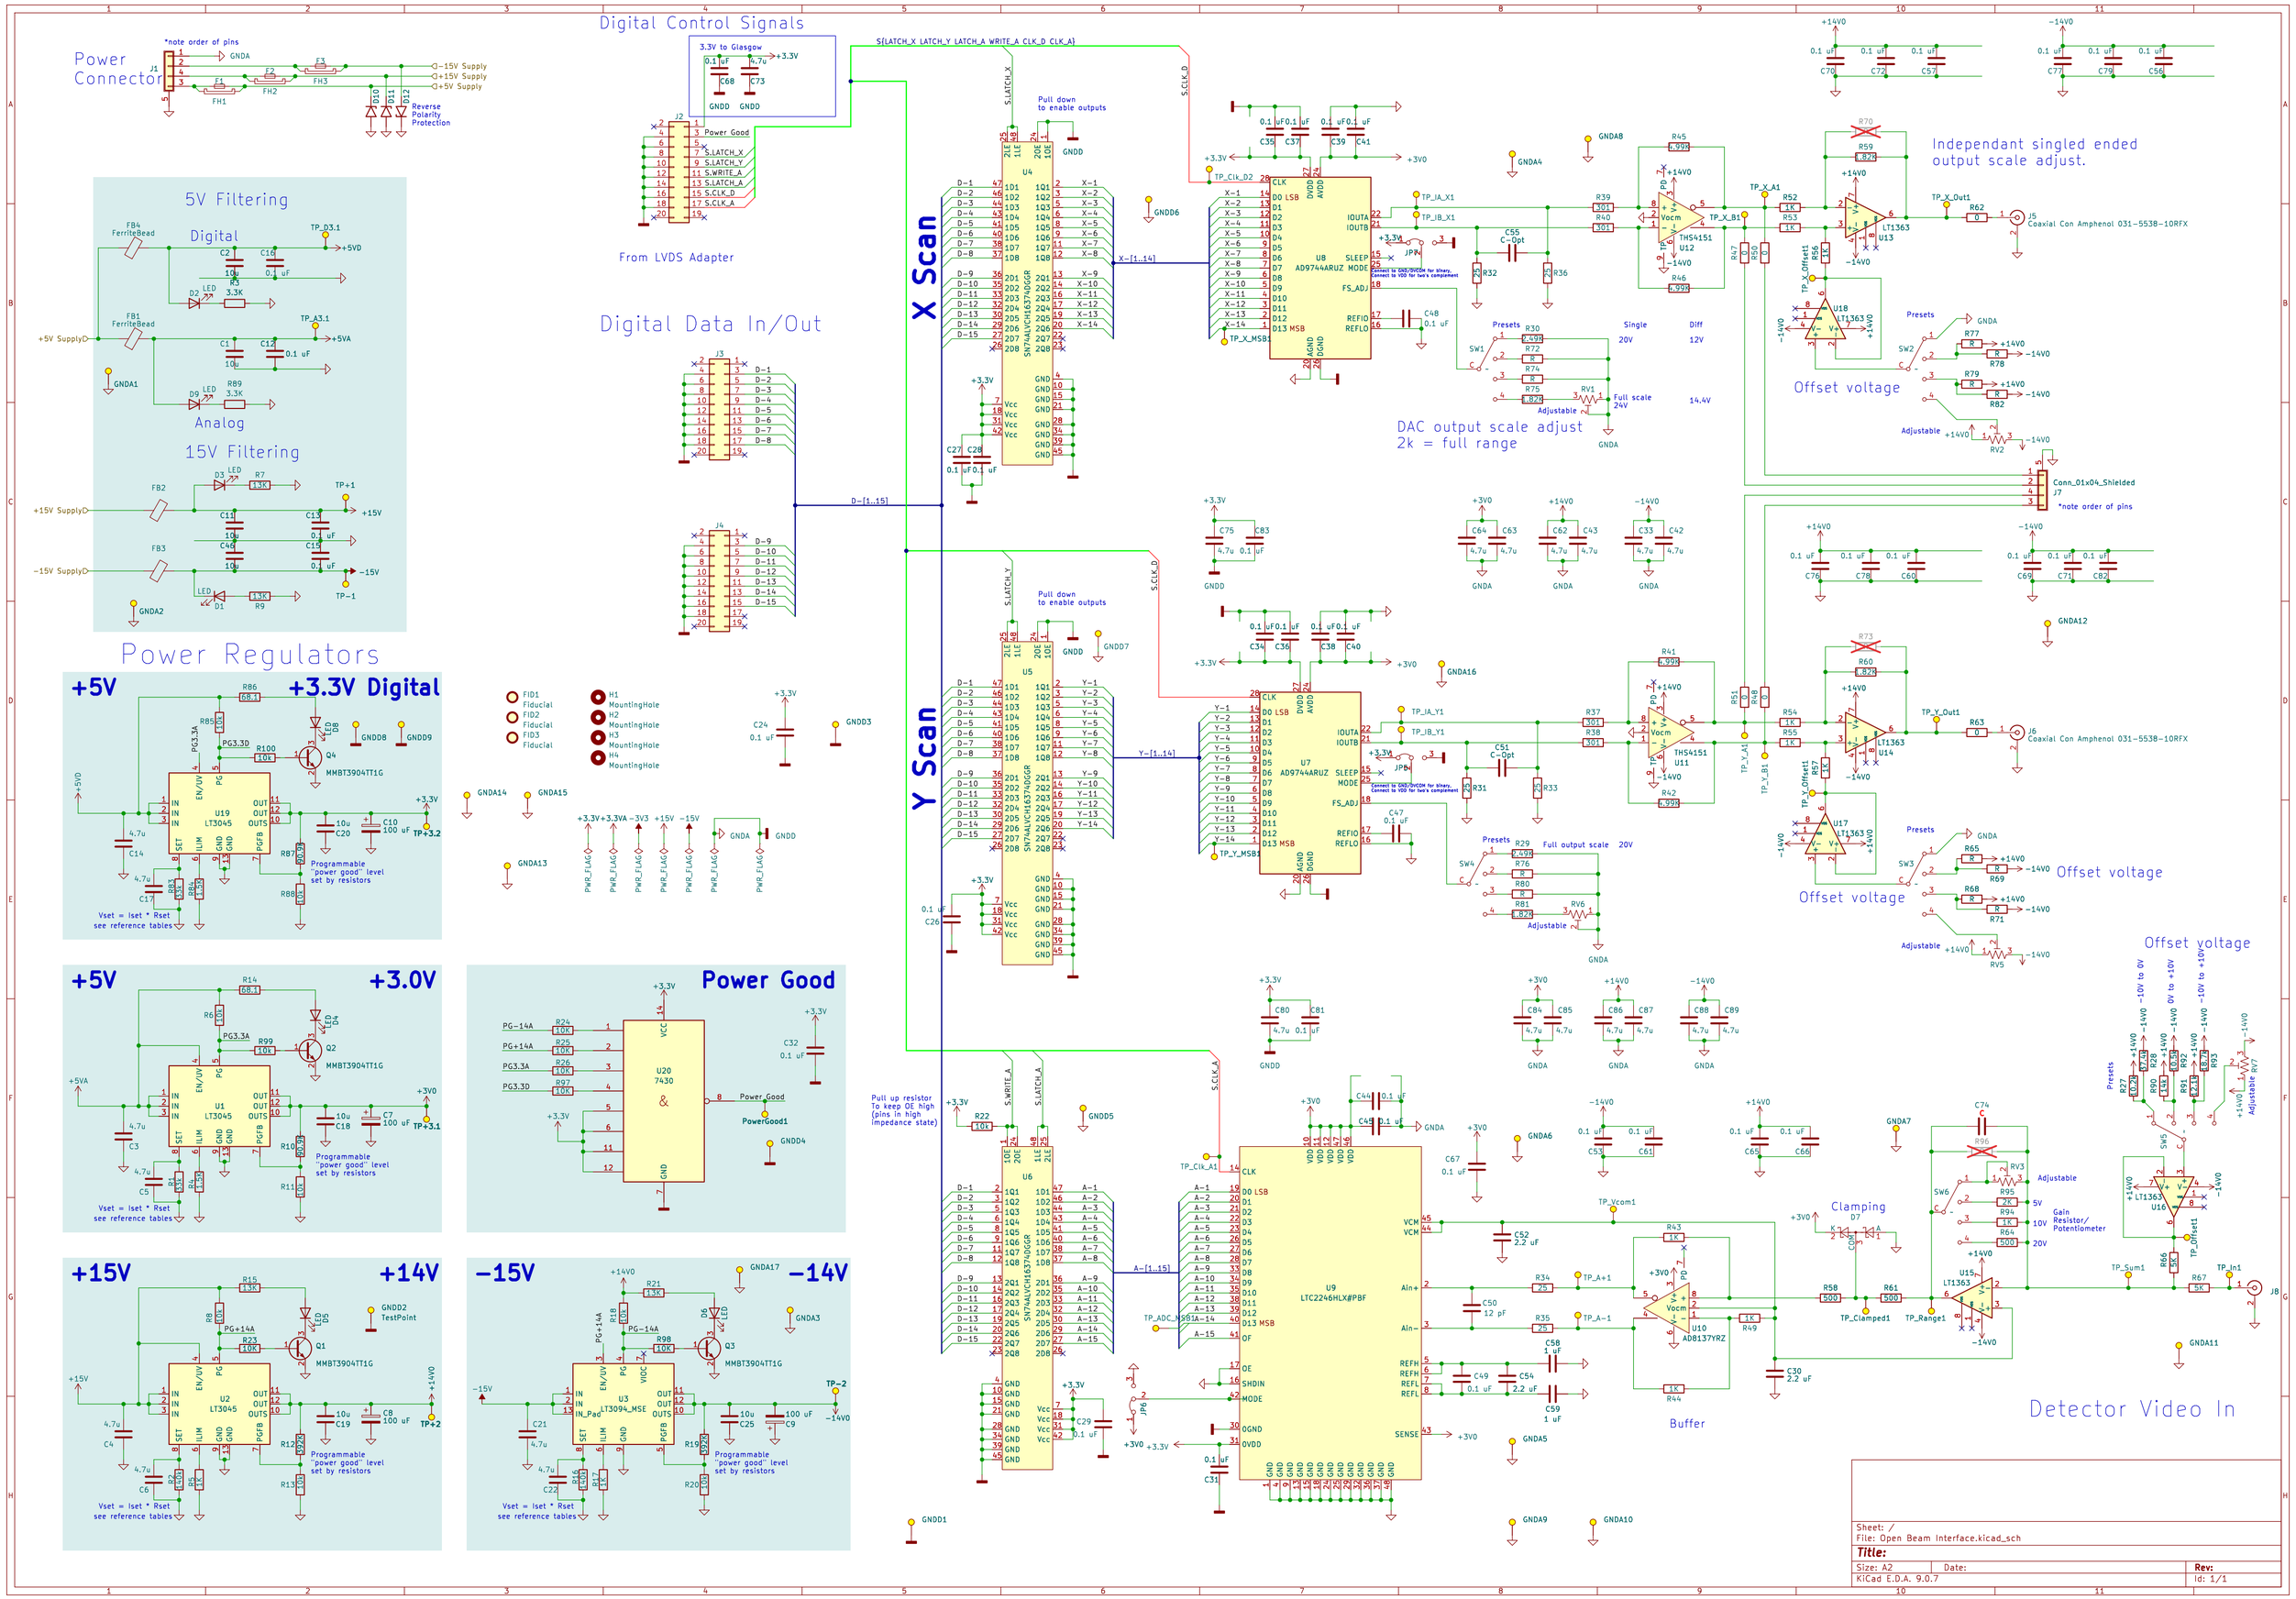
Power Connector
*note order of pins
GNDA
−15V Supply
+15V Supply
+5V Supply
Reverse Polarity Protection
Digital Control Signals
3.3V to Glasgow
Power Good
S.LATCH_X
S.LATCH_Y
S.WRITE_A
S.LATCH_A
S.CLK_D
S.CLK_A
From LVDS Adapter
Pull down to enable outputs
X Scan
Y Scan
Digital Data In/Out
5V Filtering
Digital
Analog
15V Filtering
Power Regulators
+5V
+3.3V Digital
+3.0V
+15V
+14V
−15V
−14V
Programmable "power good" level set by resistors
Vset = Iset * Rset
see reference tables
Power Good
Independant singled ended output scale adjust.
Offset voltage
DAC output scale adjust
2k = full range
Full scale 24V
Full output scale 20V
Single 20V
Diff 12V
14.4V
Clamping
Buffer
Gain Resistor/ Potentiometer
Detector Video In
Coaxial Con Amphenol 031-5538-10RFX
Conn_01x04_Shielded
*note order of pins
Pull up resistor To keep OE high (pins in high impedance state)
Sheet: /
File: Open Beam Interface.kicad_sch
Title:
Size: A2
Date:
Rev:
KiCad E.D.A. 9.0.7
Id: 1/1