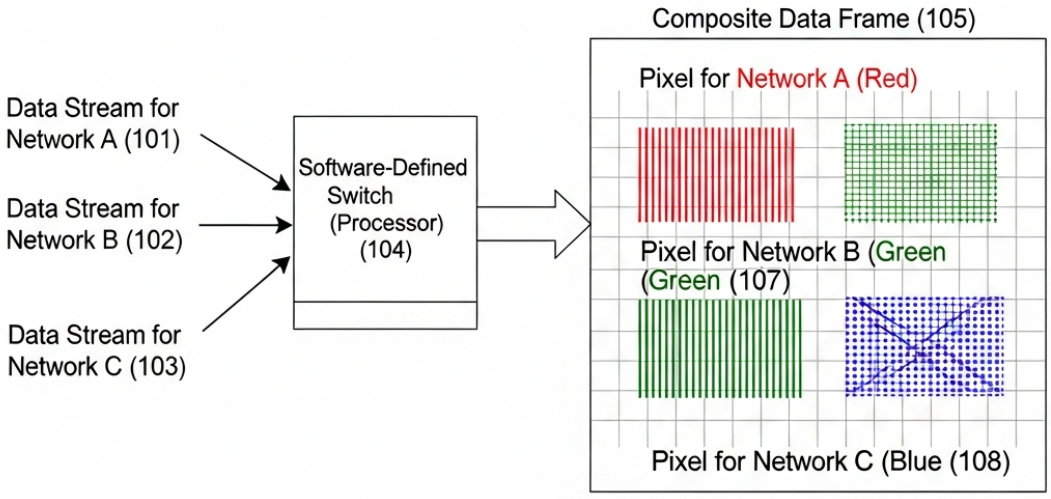

Composite Data Frame (105)
Pixel for Network A (Red)
Data Stream for Network A (101)
Data Stream for Network B (102)
Data Stream for Network C (103)
Software-Defined Switch (Processor) (104)
Pixel for Network B (Green
(Green (107)
Pixel for Network C (Blue (108)

FIG. 1

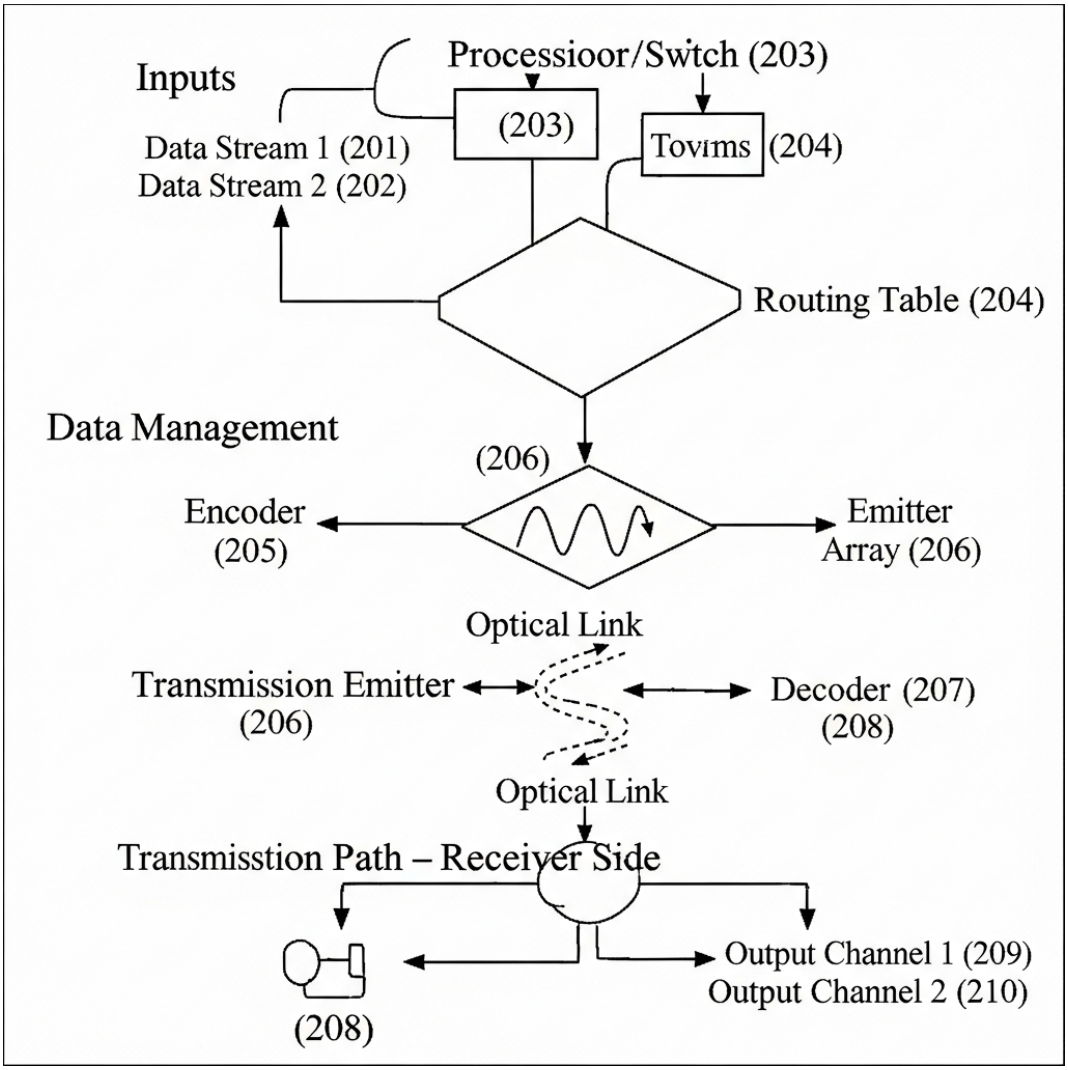

Inputs
Processioor/Switch (203)
(203)
Tovims (204)
Data Stream 1 (201)
Data Stream 2 (202)
Routing Table (204)
Data Management
(206)
Encoder
(205)
Emitter
Array (206)
Optical Link
Transmission Emitter
(206)
Decoder (207)
(208)
Optical Link
Transmisstion Path – Receiver Side
Output Channel 1 (209)
Output Channel 2 (210)
(208)

FIG. 2

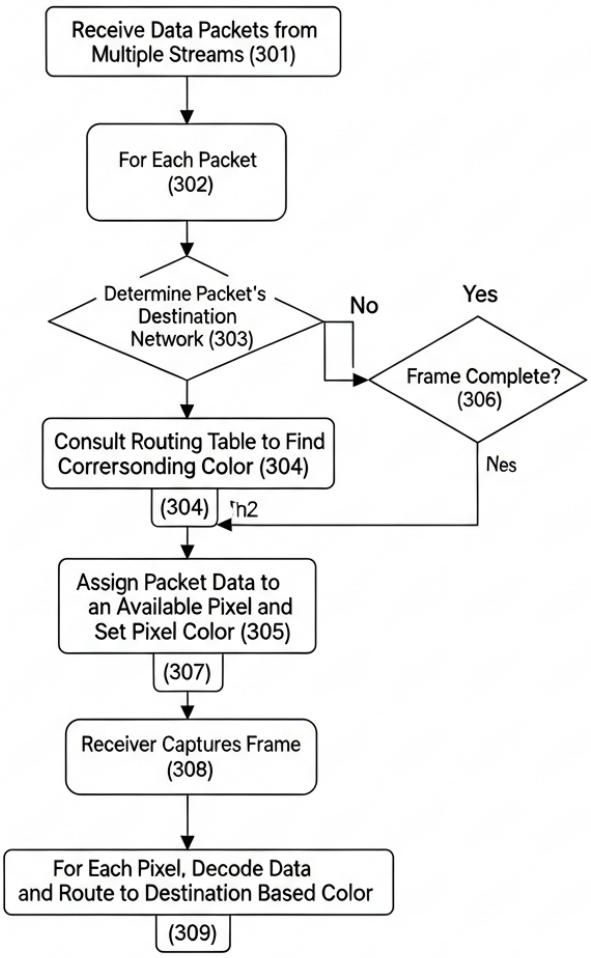

Receive Data Packets from Multiple Streams (301)
For Each Packet (302)
Determine Packet's Destination Network (303)
No
Yes
Frame Complete? (306)
Consult Routing Table to Find Correrssonding Color (304)
Nes
(304)
'h2
Assign Packet Data to an Available Pixel and Set Pixel Color (305)
(307)
Receiver Captures Frame (308)
For Each Pixel, Decode Data and Route to Destination Based Color
(309)

FIG. 3