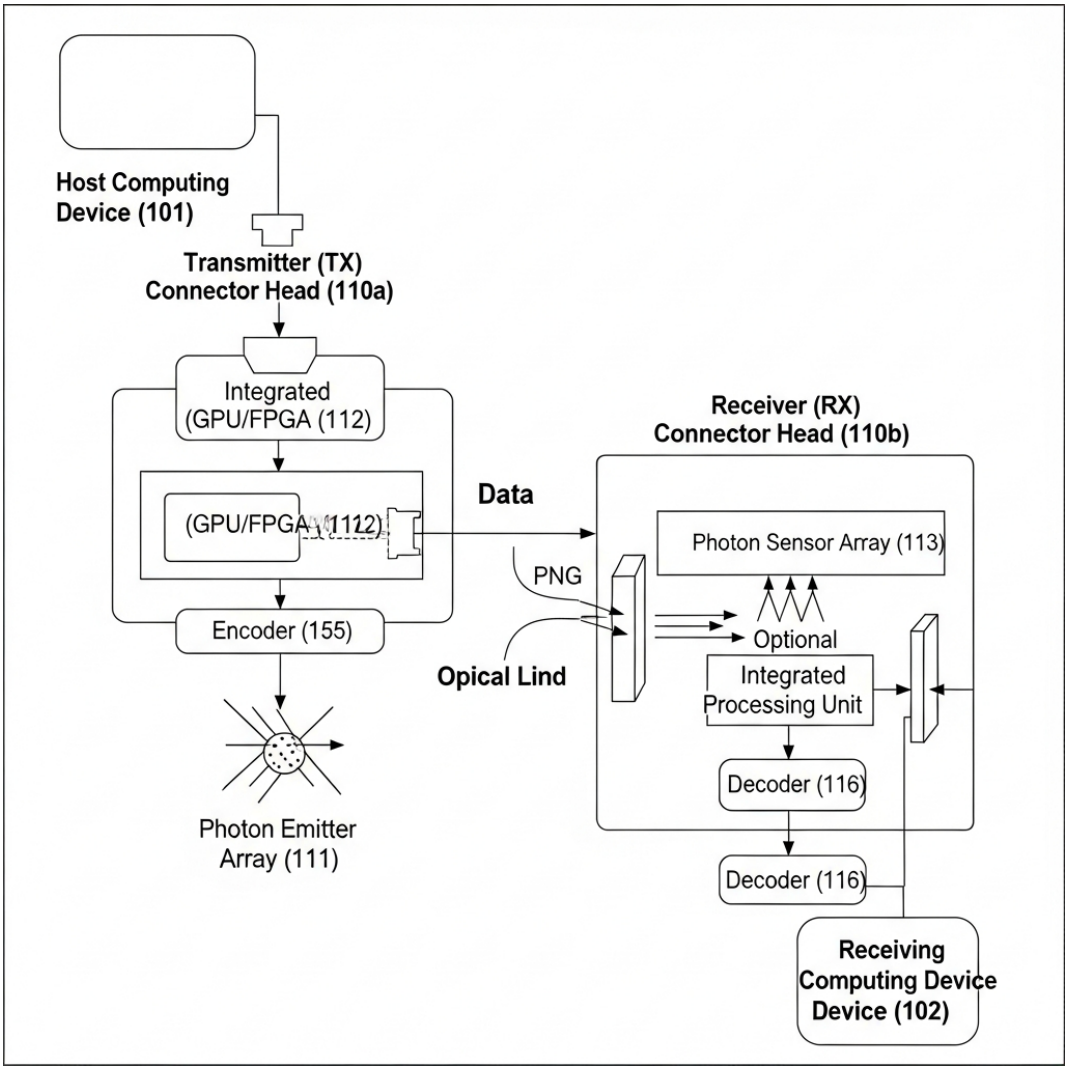
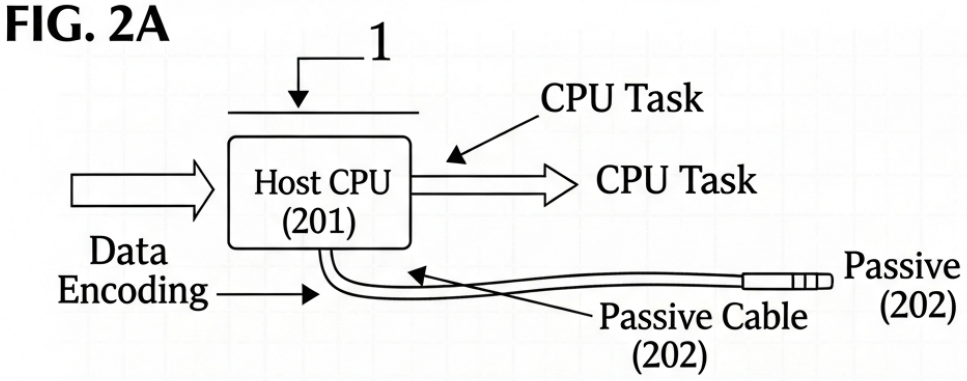

Host Computing Device (101)
Transmitter (TX) Connector Head (110a)
Integrated (GPU/FPGA (112)
(GPU/FPGA (1112)
Encoder (155)
Photon Emitter Array (111)
Data
PNG
Opical Lind
Receiver (RX) Connector Head (110b)
Photon Sensor Array (113)
Optional
Integrated Processing Unit
Decoder (116)
Decoder (116)
Receiving Computing Device Device (102)

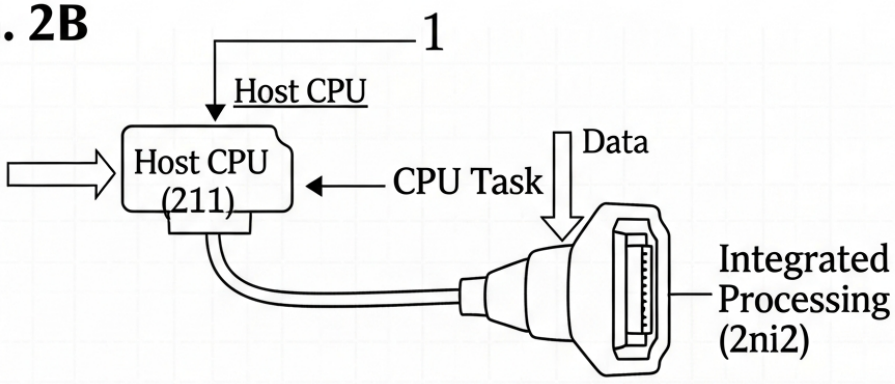
FIG. 1

FIG. 2A



Traditional Passive Interconnect (200)

FIG. 2B



Active Acable System (210)

FIG. 2

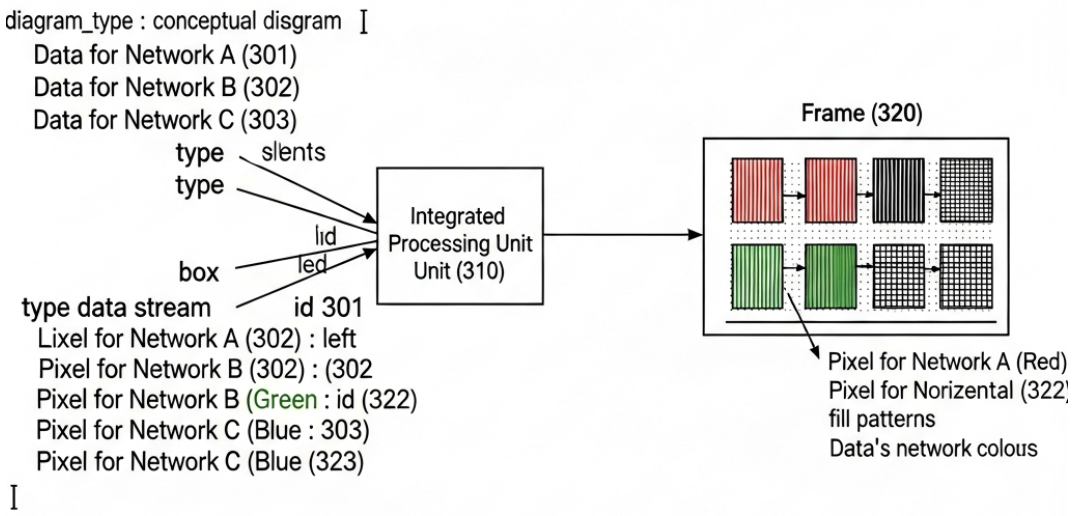

diagram_type : conceptual disgram
Data for Network A (301)
Data for Network B (302)
Data for Network C (303)
type
type
box
type data stream
id 301
Integrated Processing Unit Unit (310)
Frame (320)
Lixel for Network A (302) : left
Pixel for Network B (302) : (302
Pixel for Network B (Green : id (322)
Pixel for Network C (Blue : 303)
Pixel for Network C (Blue (323)
Pixel for Network A (Red)
fill patterns
Data's network colous

FIG. 3