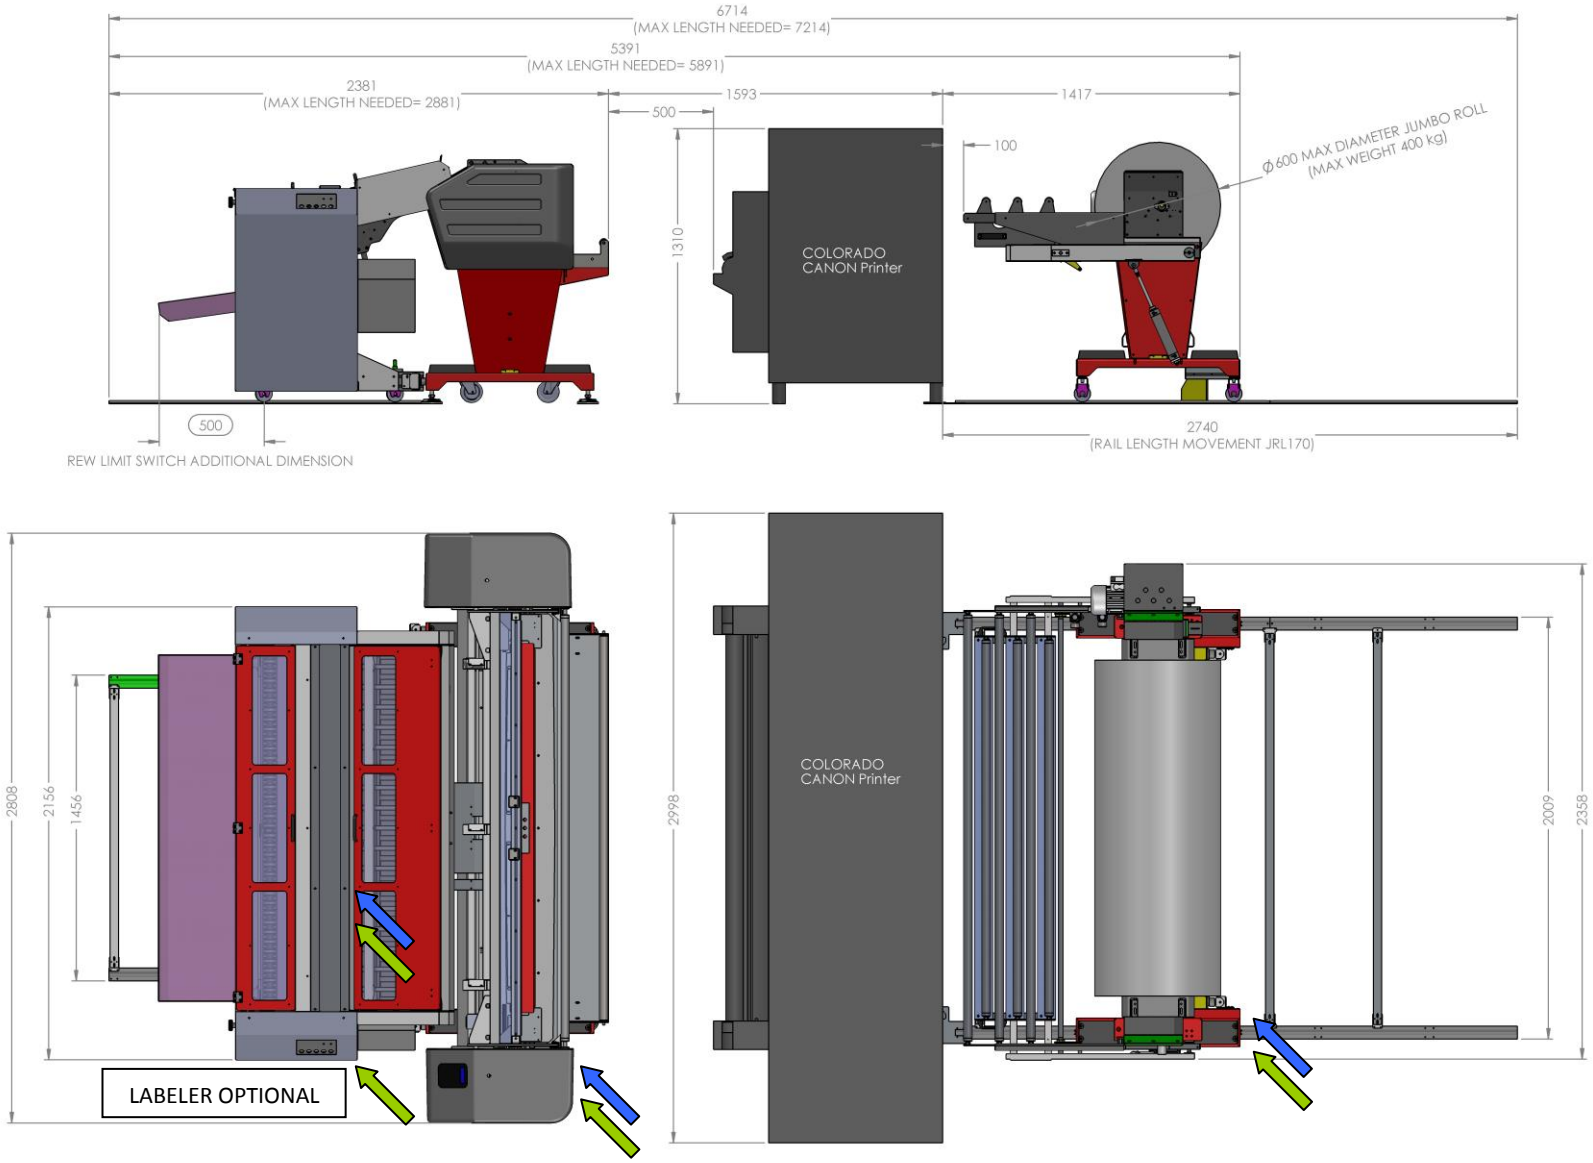

FOTOBA INTERNATIONAL s.r.l.
Via G. Marconi, 101
13854 Quaregna Cerreto (BI) Italy
C.F./P. IVA: IT01962220024

SITE PREPARATION DRAWING

JRL170 + XLD170 + REW162 INLINE WITH COLORADO

08/07/2020

AIR CONNECTION

JRL 170:	6 bar - Rapid fitting for plastic tube Ø 8
XLD 170 :	2 bar - Rapid fitting for plastic tube adaptor Ø 8 - 12
	Air Consumption : 0.1 l x cicle
REW 162:	3,5 bar - Rapid fitting for plastic tube Ø 8
	Air Consumption : 0.3 l x cicle

POWER SUPPLY

JRL 170:	230 VAC	400W	
XLD 170 :	230 VAC	250W	
REW 162:	230 VAC	150W	
LABELER:	230 VAC	150W	(OPTIONAL)

NOTE:

DM00204 CONNECTING KIT FOR CANON COLORADO 1640/50 REQUIRED.