

LOW PROFILE HYDRAULIC TORQUE WRENCH ULTRA SLIM

TRITORC offers a series of Low-Profile Torque Wrenches which are crucial for applications in constricted spaces like Christmas Trees on BOP. A High-Performance Steel Alloy used for several components including, the Housing. This keeps the tool light, compact and strong.




- 360°×180° swivel for better degree of movement.
- Self-lubricating low Nickel Bronze for drive bush to protect body from wear.
- The reduced dimensions allow the tool to fit into tight spaces easily.

MODEL	HEX A/F				Min. Torque	Max. Torque	Tool Weight Kg.
	mm	mm	Inch	Inch	N.m	N.m	
HSL-2	19	60	7/8"	2.3/8"	293	3051	2.70
HSL-4	46	80	1.13/16"	3.1/8"	608	6733	6.30
HSL-8	60	90	2.3/8"	3.1/2"	1192	12834	11.60

HSL LINK SELECTION

THL-2 Link	Hex Size		THL-4 Link	Hex Size		THL-8 Link	Hex Size	
	Inch	mm		Inch	mm		Inch	mm
HSL-2-19	333333	19	HSL-4-46		46	HSL-8-60		60
HSL-2-22		22	HSL-4-46F	1-13/16"		HSL-8-60F	2-3-8"	
HSL-2-22F	7/8"		HSL-4-50		50	HSL-8-63F	2-1/ 2"	
HSL-2-24		24	HSL-4-50F	2"		HSL-8-65		65
HSL-2-25F	1"		HSL-4-55		55	HSL-8-65F	2-9/16"	
HSL-2-27		27	HSL-4-55F	2.3-16"		HSL-8-66F	2-5/8"	
HSL-2-27F	1.1/16"		HSL-4-60		60	HSL-8-68F	2-11/16"	
HSL-2-30		30	HSL-4-60F	2.3-8"		HSL-8-69F	2-3/4"	
HSL-2-30F	1.3/16"		HSL-4-63F	2-1/ 2"		HSL-8-70		70
HSL-2-31F	1-1/4"		HSL-4-65		65	HSL-8-71F	2-13/16"	
HSL-2-32		32	HSL-4-65F	2-9/16"		HSL-8-73F	2-7/8"	
HSL-2-33F	1-5/16"		HSL-4-66F	2-5/8"		HSL-8-74F	2-15/16"	
HSL-2-34		34	HSL-4-68F	2-11/16"		HSL-8-75		75
HSL-2-34F	1-3/8"		HSL-4-69F	2-3/4"		HSL-8-76F	3"	
HSL-2-35		35	HSL-4-70		70	HSL-8-77F	3-1/16"	
HSL-2-36		36	HSL-4-71F	2-13/16"		HSL-8-79F	3-1/8"	
HSL-2-36F	1-7/16"		HSL-4-73F	2-7/8"		HSL-8-80		80
HSL-2-38		38	HSL-4-74F	2-15/16"		HSL-8-80F	3-3/16"	
HSL-2-38F	1-1/ 2"		HSL-4-75		75	HSL-8-82F	3-1/4"	
HSL-2-39F	1-9/16"		HSL-4-76F	3"		HSL-8-84F	3-5/16"	
HSL-2-41		41	HSL-4-77F	3-1/16"		HSL-8-85		85
HSL-2-41F	1-5/8"		HSL-4-79F	3-1/8"		HSL-8-85F	3-3/8"	
HSL-2-42F	1-11/16"		HSL-4-80		80	HSL-8-87F	3-7/16"	
HSL-2-44F	1-3/4"					HSL-8-88F	3-1/2"	
HSL-2-46		46				HSL-8-90		90
HSL-2-46F	1-13/16"							
HSL-2-50		50						
HSL-2-50F	2"							
HSL-2-55		55						
HSL-2-55F	2.3-16"							
HSL-2-60		60						
HSL-2-60F	2.3-8"							

LOW PROFILE HYDRAULIC TORQUE WRENCH ULTRA SLIM

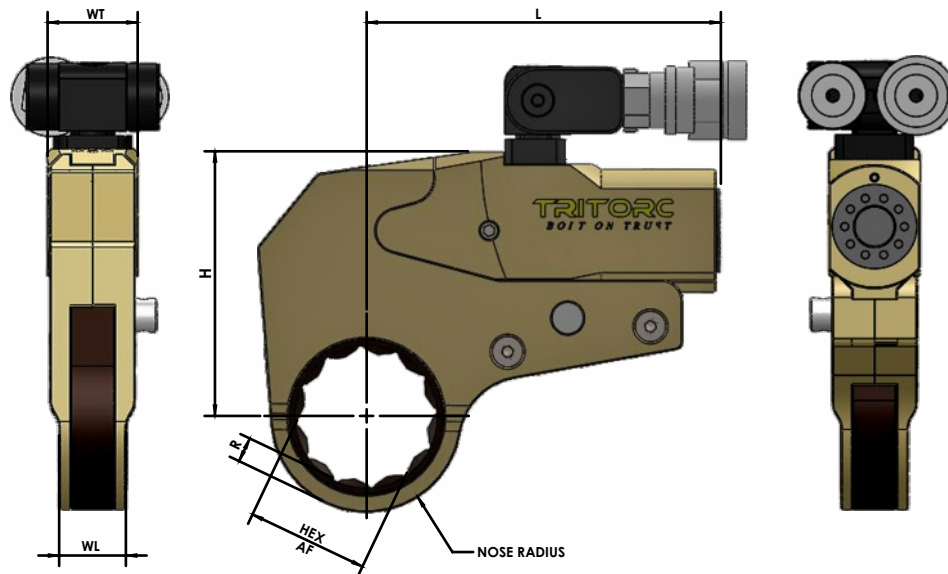

Power Head		Torque Range		Hex Size	L	H	WL	WT	R
		Min	Max	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	(Nose Width)
THL-2	Ft.Lbs Nm	214 293	2217 3051	36.51 (1-7/16)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				31.75 (1-1/4)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				46.03 (1-13/16)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				41.28 (1-5/8)	135 (5.31)	135 (5.31)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				50.8 (2)	139 (5.47)	104 (4.09)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				55.58 (2-3/16)	137 (5.39)	110 (4.33)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				60.33 (2-3/8)	137 (5.39)	111 (4.37)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
THL-4	Ft.Lbs Nm	443 608	4891 6733	65.1 (2-9/16)	174 (6.85)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	10.5 (0.41)
				69.85 (2-3/4)	176 (6.93)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	10.5 (0.41)
				74.63 (2-15/16)	176 (6.93)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	10.5 (0.41)
THL-8	Ft.Lbs Nm	867 1192	9323 12834	53.98 (2-1/8)	216 (8.50)	154 (6.06)	38 (1.49)	61.5 (2.42)	13.35 (0.53)
				79.38 (3-1/8)	216 (8.50)	154 (6.06)	38 (1.49)	61.5 (2.42)	14.45 (0.57)

Note: Dimensions are subject to change. For Higher Torque Values we can provide you with Customized Solutions.