

PRODUCTION SITE

NİĞTAŞ 150S

PRODUCT SPECIFICATION	Vicronized natural calcium carbonate at high purity and whiteness is	ori
	natural sources.	

riginated from

Certified ISO 22000-2005, ISO 22716-2007 OHSAS 1801-2007, ISO 10002-2014, ISO 1401-2015, ISO 9001-2015

Nigde / TURKEY

CHEMICAL ANALYSIS	CaCO ₃	$99,35 \pm 0,2$	(%)
	MgO	0.3 ± 0.1	(%)
	SiO ₂	< 0,1	(%)
	Fe ₂ O ₃	0.04 ± 0.01	(%)
	HCI Insoluble	< 0,1	(%)
TECHNICAL DATA	Whiteness (L) (ASTM E-313) Elrepho 450x	> 97,50	(%)
	Brightness (Ry C/2) (DIN 6174) Elrepho 450x	> 93,00	(%)
	Moisture Factory Depart (ISO 787-2)	< n3	(%)


Moisture, Factory Depart (ISO 787-2) < 0,3 (%) pH value (ISO 787-9) $8,5 \pm 1,0$ Hardness by (Moh's) 3 Mohs Dop Absorbtion (ISO 787-5) 18 gr/100gr Oil Absorbtion (ISO 787-5) 11 gr/100gr Refractive Index 1,57

Tap Density 1,52 gr/ml

APPLICATIONS

- Powder Detergents
- Construction chemicals (Adhesive, Suture etc.)
- Animal feed additive
- Agricultural products

Malvern Mastersizer 2000 Particle Size Distribution

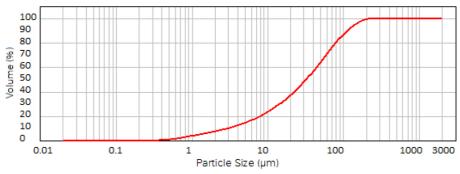

Mastersizer 2000 **Parameters** Value PARTICLE SIZE DISTRIBUTION Mean Grain Size, D50 $30,00 \pm 2,0$ (µ) D97 $135,00 \pm 15,0$ Top – Cut, (μ) Volume % of particles below $7,50 \pm 1,0$ (%) Specific Surface Area 0.80 ± 0.10 (m^2/cm^3) Sieve Residue on 355µ (ISO 787-7) < 0,1 (%)

PACKING 25/40 kg kraft / PP sack+1.250/1.200 kg big bag Or bulk in 1.250/1.000 kg big bag (palletized)

These information are related to specific material defined above that they are based on technical measuring data that Nigtas belives to be reliable. Responsibility of appreciate and determine the suitability of this product before any use belongs to customer or corporation.