

- 20A switch – 12 (one need to support more current)




- 2p - 7.62 mm pitch screw terminal connectors - 30



- 2p 3p 4p – 5mm pitch screw terminal connectors – 10 each



- 6 pin jst headers - 5

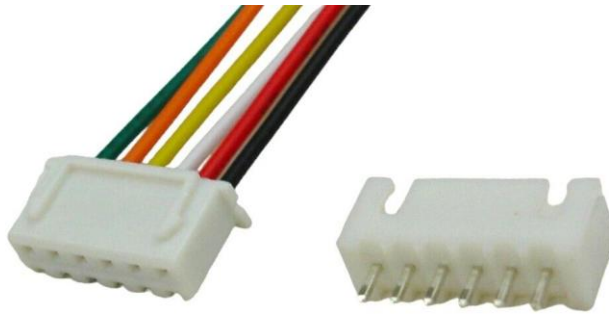

- Jst cables – 2p 3p 4p 5p 6p – 10 each
- Pin headers (male female 5 each)



- PLA (gray or black) tem range – 190 - 210 (max 230 must start 190)