


Power Input– 2S LiPo
Bulk Capacitator




3.3V Logic Regulator
Steps down 5V rail to 3.3V for ESP32

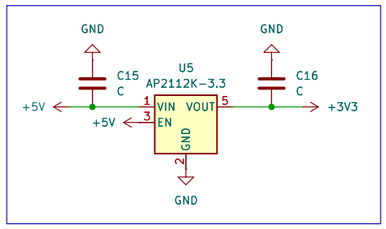


5V Buck Converter

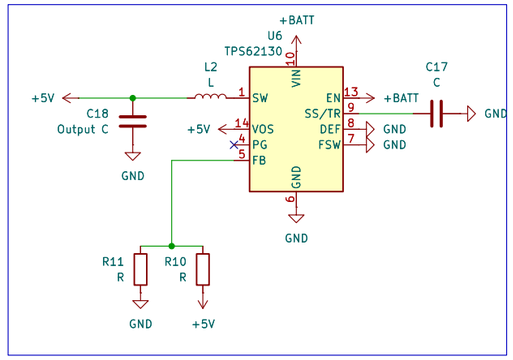


Motor Gate Driver:
10k pullup resistors making open-drain nFault and SNSOUT outputs high during normal operation
C22 and C26 supporting driver's VM battery supply

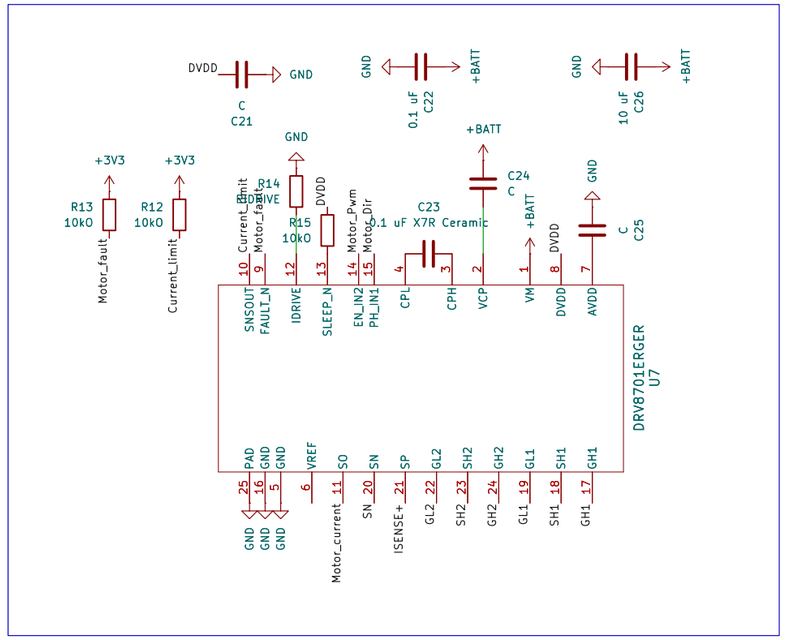


ESP32 Wireless Receiver / Controller
10kO pull-up resistors keep high, push buttons pull EN low to boot or reset
Programming Connector J6
Supply Capacitators

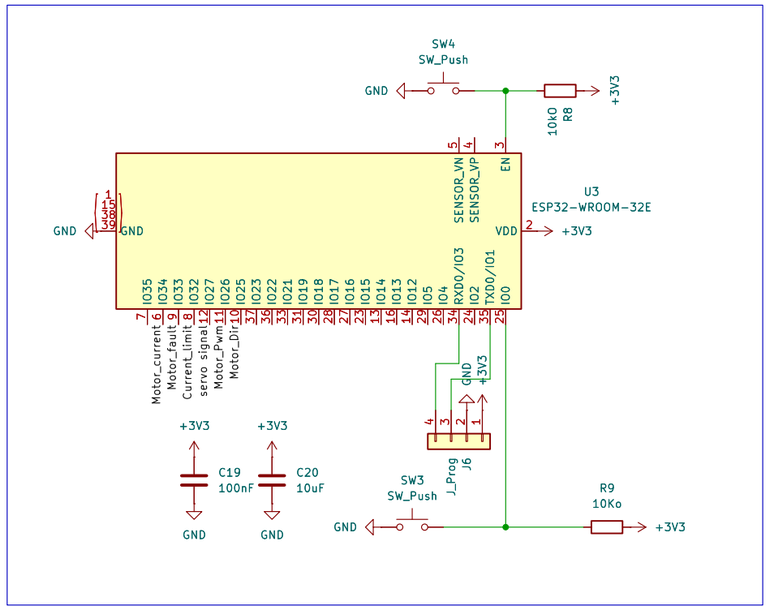

Steering Servo Output
provides power and control signal from esp32 to steering servo
bulk capacitator added

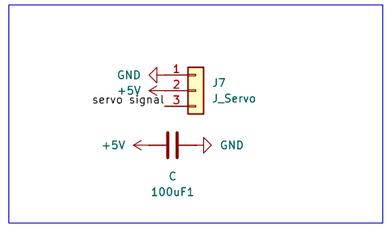

4-Mosfet h-bridge

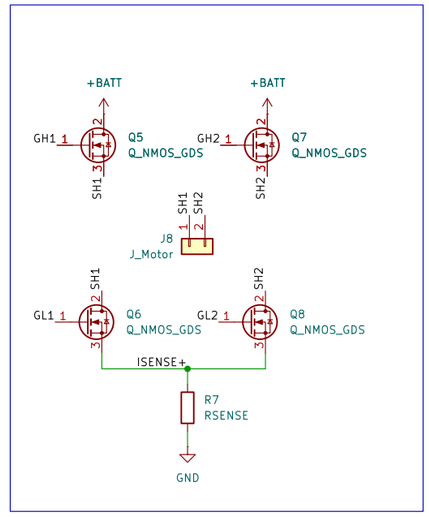

Sheet: / File: Two Directional Motor Circuit with H-Bridge.kicad_sch		
Title:		
Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1