


LED Behavior Summary

Please see this attachment : [Led status behaviour.pdf](#)

LED behavior on Camera Model with LED1[GREEN] / LED2 [RED] design

Model: MPB83/836, MPB85/854, Focus66, ..etc.

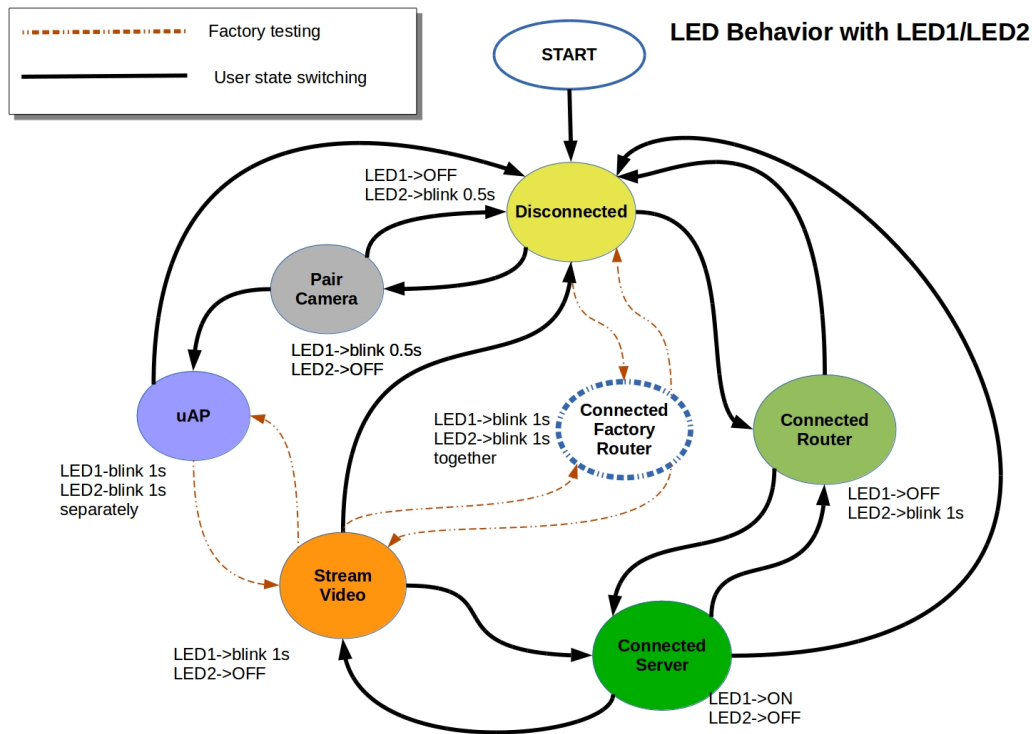

LED behavior on Camera Model with LED1[GREEN] design

Model: Focus73 (No speaker)

| No. | Status | LED 1 |
|-----|--|--|
| 1 | Power Up Initializing (First 10 sec) | ON |
| 2 | Initialization completed & in Infra Mode, Searching for Factory / User-Defined SSID (Router disconnected) | Blink every 2 seconds (ON=0.25s ; ON=1.75s) |
| 3 | Initialization completed & in Infra Mode, Found & Connected to Factory SSID (Factory router connected) | ON 2 sec OFF 2 sec (ON=2s ; OFF=2s) |
| 4 | Initialization completed & in Infra Mode, Found & Connected to User-Defined SSID (Server connected) | ON |
| 5 | Connected to router previously but ping to Server failed (Server disconnected) | Blink every 500 ms (ON=0.25s ; OFF=0.25s) |

| | | |
|---|--|---|
| 6 | Re-Connected to router (Router connected) | ON |
| 7 | Press & hold button for 3 sec to go pair mode (Pairing in processing) | Blink every 1 sec (ON=0.25s ; OFF=0.75s) |
| 8 | From RF/BLE pairing switch over to WIFI uAP pair mode (ONLY in MBP83/85/836/854/Focus73) (Pair mode) | Blink every 1 sec (ON=0.25s ; OFF=0.75s) |
| 9 | When video streaming happening (Video streaming) | Blink every 3 sec (ON=1 sec ; OFF=2 sec) |