






PRODUCT DATA SHEET

Product: Cuplock System Scaffolding S235

Specification and Properties: -

Description: standard posts with cup joint every 0.50m, connected horizontally with Ledgers & vertically with connecting spigot

Available sizes	: 0.50-1.00-1.50-2.00-2.50-3.00m
Standard Vertical Tubes (OD*t)	: 48.30*3mm
Material Specification.	: EN10025-2/19- S235JR
Conforming to	: EN10219
Allowable working loads according to	: EN12810 & EN12811
Finishing	: Painted

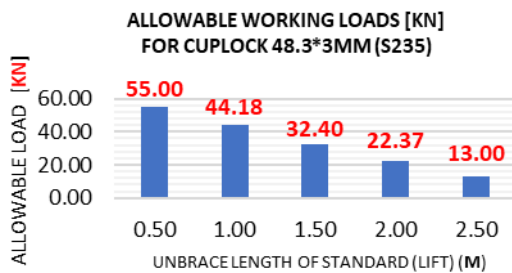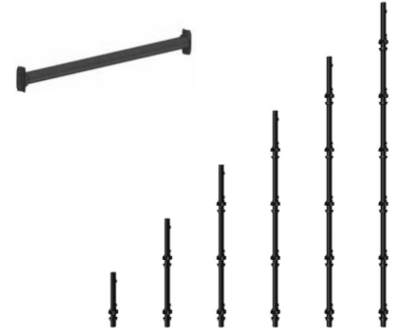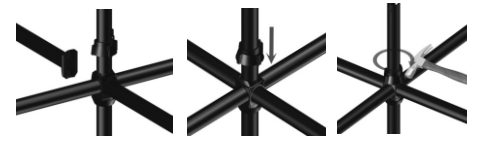

Ledger size L [m]	allowable W [KN/m]	allowable P [KN]
0.60	16.6	4.9
0.90	7.4	3.3
1.20	4.1	2.5
1.50	2.6	1.9
1.80	1.8	1.6
2.10	1.3	1.4
2.40	1.0	1.2

Cuplock spigot	Adjustable base jack	Scaffolding tubes
Used on top of each standard for making end to end connections and provided with holes for bolting.	Weight= 3.60 kg, plate size 150*150*6mm Length= 60cm, opening upto 40cm SWL= 50.00 KN	EN39 & EN10219 Finishing: hot dip galv. & painted

Double coupler	swivel coupler	Single (putlog) coupler	Joint Pin	Girder Coupler
Standard EN-74	Standard EN-74	Standard EN-74	Standard EN-74	Standard EN-74

Board retaining clamp (BRC)	Sleeve coupler	Toe Board Clamp	Ladder clamp