





PRODUCT DATA SHEET

Product: Cuplock System Scaffolding S355 (st.52)

Specification and Properties: -


Description: standard posts with cup joint every 0.50m, connected horizontally with Ledgers & vertically with connecting spigot

Available sizes	: 0.50-1.00-1.50-2.00-2.50-3.00m
System Tubes (OD*THIK.)	: 48.30*3.20mm
Material Specification.	: EN10025-2 (S355JR)
Min Yield Strength	: 355 N/mm ² (MPa) Premium high-grade steel
Conforming to	: EN10219, EN10204
Allowable working loads according to	: EN12810 & EN12811
Finishing	: Painted

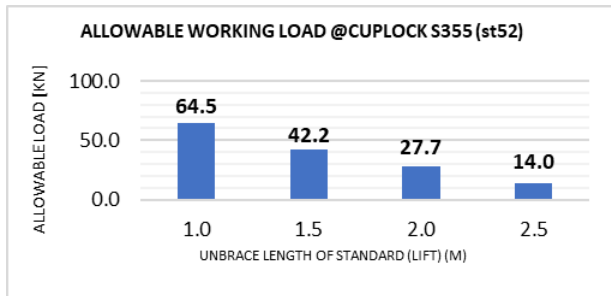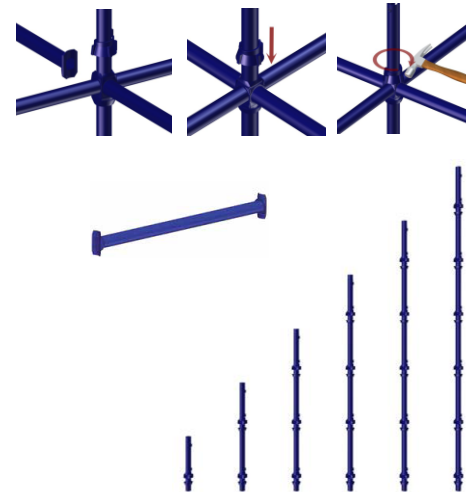

Ledger size L [m]	allowable W [kN/m]	allowable P [kN]
0.60	31.2	9.3
0.90	13.8	6.2
1.20	7.7	4.6
1.50	4.9	3.7
1.80	3.4	3.0
2.10	2.5	2.6
2.40	1.9	2.2

		
Cuplock spigot	Adjustable base jack	Scaffolding tubes
Used on top of each standard for making end to end connections and provided with holes for bolting.	Weight= 3.60 kg, plate size 150*150*6mm Length= 60cm, opening upto 40cm SWL= 50.00 KN	EN39 & EN10219 Finishing: hot dip galv. & painted

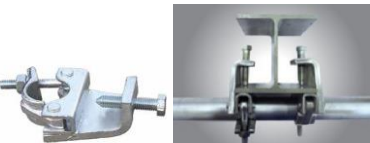				
Double coupler	swivel coupler	Single (putlog) coupler	Joint Pin	Girder Coupler
Standard EN-74	Standard EN-74	Standard EN-74	Standard EN-74	Standard EN-74

			
Board retaining clamp (BRC)	Sleeve coupler	Toe Board Clamp	Ladder clamp