
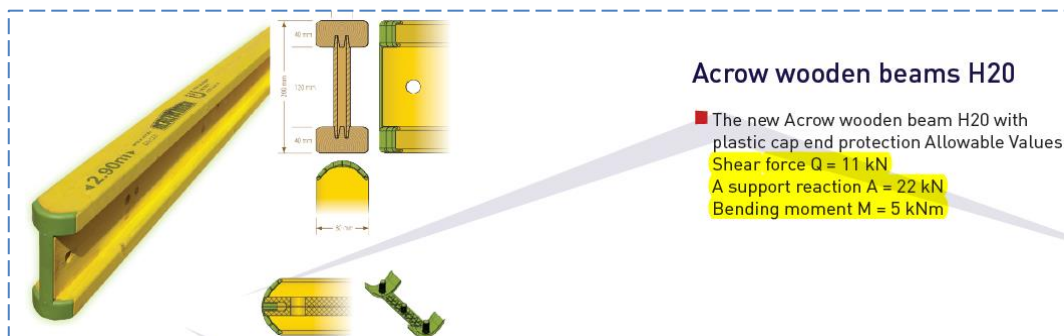


Timber Beam H20

Timber H20 Technical Data:

- Allowable bending Moment = 5.00 Kn.m
- Allowable Shear Force = 11.00 Kn
- Max. allowable deflection = $L/400$
- (E) for H20 = 92.45 t/cm²
- $I = 4,613.00 \text{ cm}^4$



Form-on smartBEAM 20

Your benefits:

- reliably high load capacity across the entire beam length thanks to homogeneous web material
- secured component load capacity, as all of the flanges are machine stress-graded and load-tested
- consistent product characteristics owing to high dimensional stability
- multiple savings compared to squared timber due to improved load capacity combined with lower weight



Example:

- Floor thickness: 20 cm | ● Secondary beam spacing: 0.75 m |
- equals primary beam spacing as per Table 1: 2.61 m
- Select primary beam spacing ≤ 2.61 in Table 2 ($\approx 2.50 \text{ m}$) | ● permissible prop spacing at 20 cm floor thickness in Table 2: 1.19 m

Form-on smartBEAM 20	P.U.	kg	Art.-Nr.
Form-on smartBEAM 20N 180	100	8.5	620019000
Form-on smartBEAM 20N 245	100	11.5	620020000
Form-on smartBEAM 20N 265	100	12.5	620022000
Form-on smartBEAM 20N 290	100	13.6	620023000
Form-on smartBEAM 20N 330	100	15.5	620024000
Form-on smartBEAM 20N 360	100	16.9	620025000
Form-on smartBEAM 20N 390	100	18.3	620026000
Form-on smartBEAM 20N 450	100	21.2	620027000
Form-on smartBEAM 20N 490	100	23.0	620028000
Form-on smartBEAM 20N 590	60	27.7	620029000
Form-on smartBEAM 20P 180	100	9.4	620038000
Form-on smartBEAM 20P 245	100	12.7	620039000
Form-on smartBEAM 20P 265	100	13.8	620032000
Form-on smartBEAM 20P 290	100	15.1	620033000
Form-on smartBEAM 20P 330	100	17.2	620034000
Form-on smartBEAM 20P 360	100	18.7	620035000
Form-on smartBEAM 20P 390	100	20.3	620036000
Form-on smartBEAM 20P 450	100	23.4	620037000
Form-on smartBEAM 20P 490	100	25.5	620040000
Form-on smartBEAM 20P 590	60	30.7	620041000

Technical specifications:

Web: $b = 20 \text{ cm}$

Flange: $b = 4,0 \text{ cm}$, $h = 8,0 \text{ cm}$

Moment (M): 5 kNm

Rigidity ($E \times J$): 450 kNm²

Shear force (Q): 11 kN

Certification: EN 13377

Head Office

Factory: Wady Houf, Helwan

Tel: (+202) 23254532 / 23254519

(+20223254534

Fax: (+202) 23671 347

E-mail: sales@acrow.co

