



Data Sheet for Osha Lvl Timber Board

OSHA LVL TIMBER BOARD (38MM X 225MM):

Timber scaffold boards used for decking and for toe boards should be at least 3 cm thickness and according to the Specification for timber scaffold boards BS 2482

5 Dimensions and tolerances

Basic cross-sectional sizes, when measured at 20% moisture content in accordance with BS EN 13183-1, shall conform to Table 3.

Table 3 Target cross-sectional sizes

Thickness mm	Width mm
38 ±2	225 ±5
63 ±3	225 ±5

BS 2482:2009 PAGE . 3

BS 2482:2009

BRITISH STANDARD

Annex B (informative) Support centres

The scaffold boards specified in this British Standard are designed to operate up to the target spans given in Table B.1. However, a tolerance of +100 mm is allowed over this span when setting out supports. When correctly supported, the scaffold boards are designed to meet the loadings stipulated by BS EN 12811 for scaffold platforms.

Table B.1 Target spans

Board type mm	Span m
38	1.2
38	1.5
63	2.5



BS 2482:2009 PAGE . 20

OSHA Scaffold Plank

-MICROLLAM® LVL SCAFFOLD PLANKS (p03)

- I = 102.885 cm⁴

- Z = 54.15 cm³

- E (for timber) = 2.15x1000000 psi = 151.15 t/cm²

- F (for timber) = 2400 psi = 0.168 t/cm²

- The moisture content of the plank is expected to exceed 19%.

- E= 151.15 x 0.80 = 120.92 t/cm²

- F= 0.168 x 0.80 = 0.134 t/cm²

Head Office

Factory: Wady Houf, Helwan

Tel: (+202) 23254532 / 23254519


(+20223254534

Fax: (+202) 23671 347

E-mail: sales@acrow.co



Data Sheet for Osha Lvl Timber Board

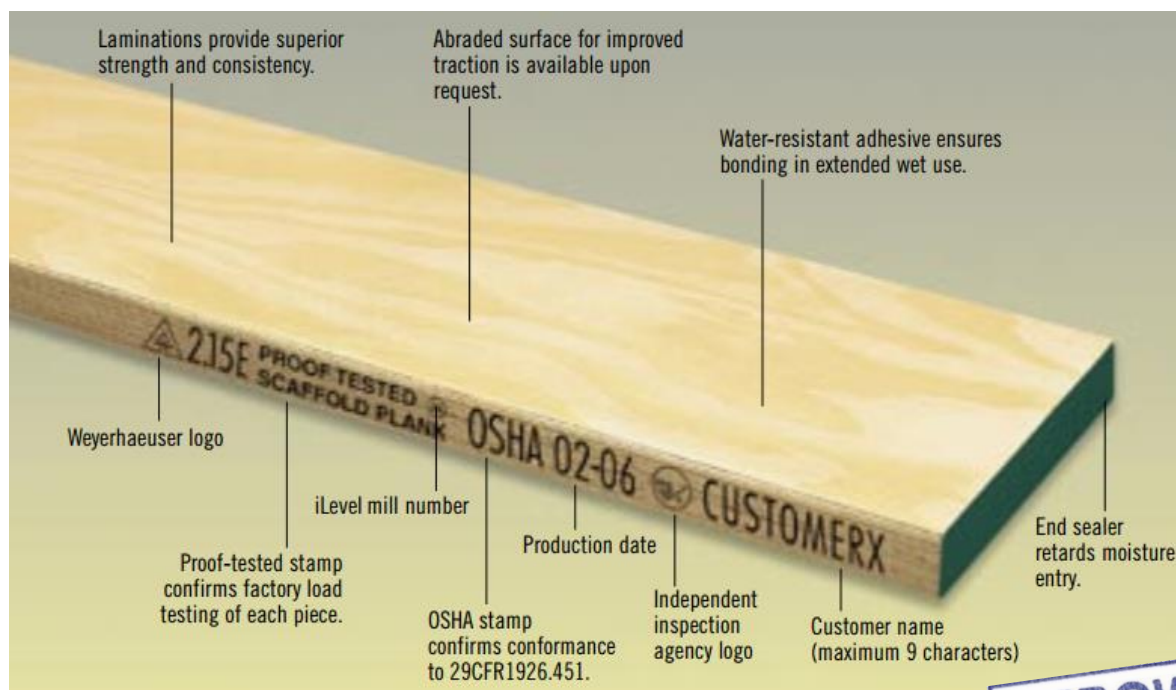

Microllam® LVL Scaffold Plank Design Properties

	U.S.		Canada	
Plank Thickness	1¾" or less	Over 1¾"	1¾" or less	Over 1¾"
Flexural Stress, F_b	2,900 psi	2,400 psi	2,900 psi	2,400 psi
Modulus of Elasticity, E	2.15 x 10 ⁶ psi	2.15 x 10 ⁶ psi	2.20 x 10 ⁶ psi	2.20 x 10 ⁶ psi
Horizontal Shear Stress, F_v	145 psi	145 psi	145 psi	145 psi
Coefficient of Variation (MOR)	12%	12%	12%	12%

General Notes

- Design properties are determined in accordance with ANSI A10.8-2001, Appendix C.
- These properties apply only to Microllam® laminated veneer lumber (LVL) scaffold planks used in conditions where the moisture content of the plank is not expected to exceed 19%. These values apply only to planks used in the flat orientation.
- F_b , E , and F_v shall be adjusted by a factor of 0.80 when used in conditions where the moisture content of the plank is expected to exceed 19%.
- Fastener values (nails, bolts, screws) shall be as provided for sawn Douglas fir per 2001 National Design Specification® for Wood Construction (NDS®) or per Canadian Standards Associations (CSA) 086-01, *Engineering Design in Wood*.
- No increases in allowable unit stresses are included for load-sharing systems.
- Values are for new or like-new product.

Head Office

Factory: Wady Houf, Helwan
Tel: (+202) 23254532 / 23254519
(+20223254534
Fax: (+202) 23671 347
E-mail: sales@acrow.co

