

Post Head jack & U-head jack

Solid Post Head Jack :

Steel 37 :

$$f_y = 2.4 \text{ t/cm}^2$$

$$f_u = 3.6 \text{ t/cm}^2$$

$$\lambda = L / i$$


Allowable stresses

$$f_c = 1.4 - 0.000065\lambda^2 \quad (\lambda < 100)$$

$$f_c = 7500 / \lambda^2 \quad (\lambda > 100)$$

$$\text{where } \lambda = L / i \quad (< 180)$$

$$P_{all} = A \times f_c$$

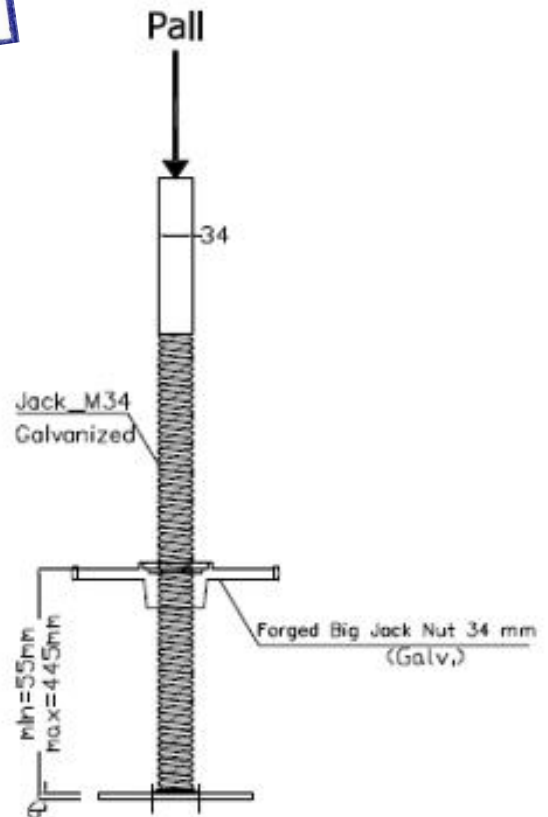

Unbraced Length L(cm)	30	40	50
Load (P) ton	11.96	11.39	10.65

Note : Recommended Load $P=7.0$ ton

Head Office

Factory: Wady Houf, Helwan

Tel: (+202) 23254532 / 23254519

(+20223254534

Fax: (+202) 23671 347

E-mail: sales@acrow.co

