



Shore brace Frame

According to DIN 17100

- Material: St 37
- Tensile Strength (F_u) = 360 N/mm²
- Yield Stress (F_y) = 235 N/mm²
- (E) for steel = 2100 t/cm²

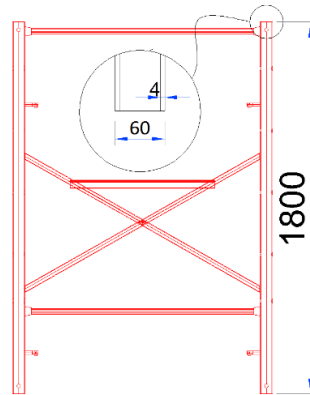

Shorbrace Frame

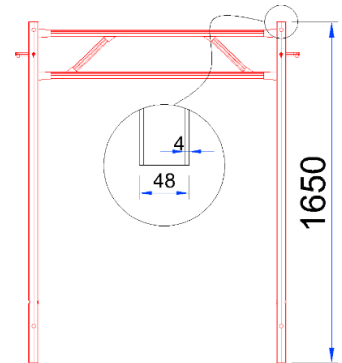

Telescopic Frame

Refer to attached appendix for Shore Brace Frame Load Test page (65)

15/01/2015 16:55	44.00	154.33	151.35	-9.58	-10.64	-7.43	-7.03
15/01/2015 16:55	49.50	173.62	170.27	-12.21	-14.03	-6.93	-8.09
15/01/2015 17:00	49.50	173.62	170.27	-15.67	-29.95	-4.88	-6.83
15/01/2015 17:00	49.50	Failure Occurred					

* ultimate load for 2 frames = 49.50 ton

* ultimate load for 1 frame = 24.75 ton

According to Shore Brace Test

- Ultimate load on frame = 24.75 ton = 247.50 KN
- Ultimate load on leg = 12.375 ton = 123.75 KN

According to ACROW catalogue

- Allowable load on frame = 108.00 KN
- Allowable load on leg = 54.00 KN
- Factor of Safety for Shore brace = $24.75/Q_{all} = 247.50/108.00 = 2.29$



Head Office

Factory: Wady Houf, Helwan
Tel: (+202) 23254532 / 23254519
(+20223254534)
Fax: (+202) 23671 347
E-mail: sales@acrow.co

