


Soldier U100

Soldier U100 Technical Data:

- Material: St 44
- $W = 22.00 \text{ kg/m'}$
- $A_{web} = 12.00 \text{ cm}^2$
- $I = 412.00 \text{ cm}^4$
- $Z = 82.40 \text{ cm}^3$

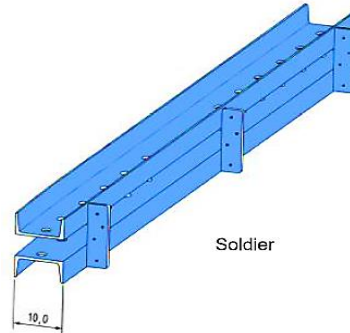

Soldier



- Max allowable deflection in soldier = $L/400$ (ACI 347-04)
- Allowable bending stress in steel (F_{all}) = 1.595 t/cm^2
- Allowable bending moment (M_{all}) = $F_{all} \times Z = 1.595 \times 82.40 \times 10 = 13.10 \text{ KN.m}$
- Allowable Shear stress in steel (F_{all}) = $0.35F_y = 0.35 \times 2.40 = 8.40 \text{ KN/cm}^2$
- Allowable shear in steel (Q_{all}) = $F_{all} \times A_{web} = 8.40 \times 12 = 100.80 \text{ KN}$
- (E) for Steel = 21000 KN/cm^2

LENGTH (m)	SHAPE
0.73	
0.98	
1.23	
1.48	
1.78	
1.98	
2.23	
2.48	
2.78	
2.98	
3.48	
3.98	
4.48	
4.98	
5.48	
5.98	

PROPERTIES OF SECTION

Painted blue

Area of Section 27.00 cm²

Moment of inertia (Ix) 412.0cm⁴

Section Modulus (Zx) 82.4 cm³

Head Office

Factory: Wady Houf, Helwan
 Tel: (+202) 23254532 / 23254519
 (+20223254534)
 Fax: (+202) 23671 347
 E-mail: sales@acrow.co

