
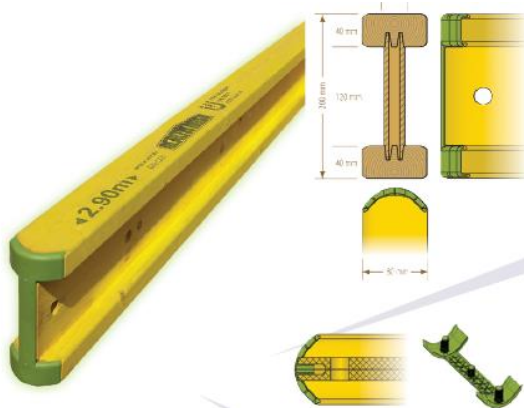


Technical Data for TIMBER BEAM H20

- Allowable bending Moment = 5.00 Kn.m
- Allowable shear Force = 11.00 Kn
- Max allowable deflection = $0.003 \times L$



Acrow wooden beams H20

- The new Acrow wooden beam H20 with plastic cap end protection Allowable Values
Shear force $Q = 11 \text{ kN}$
A support reaction $A = 22 \text{ kN}$
Bending moment $M = 5 \text{ kNm}$

- (E) for H20 = 92.45 t/cm^2
- I = $4,613.00 \text{ cm}^4$

Your benefits:

- reliably high load capacity across the entire beam length thanks to homogeneous web material
- secured component load capacity, as all of the flanges are machine stress-graded and load-tested
- consistent product characteristics owing to high dimensional stability
- multiple savings compared to squared timber due to improved load capacity combined with lower weight



Example:

- Floor thickness: 20 cm | • Secondary beam spacing: 0.75 m |
- equals primary beam spacing as per Table 1: 2.61 m
- Select primary beam spacing ≤ 2.61 in Table 2 ($\approx 2.50 \text{ m}$) | • permissible prop spacing at 20 cm floor thickness in Table 2: 1.19 m

Form-on smartBEAM 20	P.U.	kg	Art.-Nr.
Form-on smartBEAM 20N 180	100	8.5	620019000
Form-on smartBEAM 20N 245	100	11.5	620020000
Form-on smartBEAM 20N 265	100	12.5	620022000
Form-on smartBEAM 20N 290	100	13.6	620023000
Form-on smartBEAM 20N 330	100	15.5	620024000
Form-on smartBEAM 20N 360	100	16.9	620025000
Form-on smartBEAM 20N 390	100	18.3	620026000
Form-on smartBEAM 20N 450	100	21.2	620027000
Form-on smartBEAM 20N 490	100	23.0	620028000
Form-on smartBEAM 20N 590	60	27.7	620029000
Form-on smartBEAM 20P 180	100	9.4	620038000
Form-on smartBEAM 20P 245	100	12.7	620039000
Form-on smartBEAM 20P 265	100	13.8	620032000
Form-on smartBEAM 20P 290	100	15.1	620033000
Form-on smartBEAM 20P 330	100	17.2	620034000
Form-on smartBEAM 20P 360	100	18.7	620035000
Form-on smartBEAM 20P 390	100	20.3	620036000
Form-on smartBEAM 20P 450	100	23.4	620037000
Form-on smartBEAM 20P 490	100	25.5	620040000
Form-on smartBEAM 20P 590	60	30.7	620041000

Technical specifications:

Web: $b = 20 \text{ cm}$
Flange: $b = 4,0 \text{ cm}$, $h = 8,0 \text{ cm}$
Moment (M): 5 kNm
Rigidity (E x J): 450 kNm²
Shear force (Q): 11 kN
Certification: EN 13377



Compliant with
EN 13377

Form-on smartBEAM 20

-  reliably high load capacity
-  long lifespan
-  high dimensional stability

Form-on[®]



Form-on smartBEAM 20

Your benefits:

- reliably high load capacity across the entire beam length thanks to homogeneous web material
- secured component load capacity, as all of the flanges are machine stress-graded and load-tested
- consistent product characteristics owing to high dimensional stability
- multiple savings compared to squared timber due to improved load capacity combined with lower weight



Example:

- ❶ Floor thickness: 20 cm | ❷ Secondary beam spacing: 0.75 m |
 ❸ equals primary beam spacing as per Table 1: 2.61 m
 ❹ Select primary beam spacing ≤ 2.61 in Table 2 (= 2.50 m) | ❺ permissible prop spacing at 20 cm floor thickness in Table 2: 1.19 m

Form-on smartBEAM 20	P.U.	kg	Art.-Nr.
Form-on smartBEAM 20N 180	100	8.5	620019000
Form-on smartBEAM 20N 245	100	11.5	620020000
Form-on smartBEAM 20N 265	100	12.5	620022000
Form-on smartBEAM 20N 290	100	13.6	620023000
Form-on smartBEAM 20N 330	100	15.5	620024000
Form-on smartBEAM 20N 360	100	16.9	620025000
Form-on smartBEAM 20N 390	100	18.3	620026000
Form-on smartBEAM 20N 450	100	21.2	620027000
Form-on smartBEAM 20N 490	100	23.0	620028000
Form-on smartBEAM 20N 590	60	27.7	620029000
Form-on smartBEAM 20P 180	100	9.4	620038000
Form-on smartBEAM 20P 245	100	12.7	620039000
Form-on smartBEAM 20P 265	100	13.8	620032000
Form-on smartBEAM 20P 290	100	15.1	620033000
Form-on smartBEAM 20P 330	100	17.2	620034000
Form-on smartBEAM 20P 360	100	18.7	620035000
Form-on smartBEAM 20P 390	100	20.3	620036000
Form-on smartBEAM 20P 450	100	23.4	620037000
Form-on smartBEAM 20P 490	100	25.5	620040000
Form-on smartBEAM 20P 590	60	30.7	620041000

Technical specifications:

Web: b = 20 cm

Flange: b = 4,0 cm, h = 8,0 cm

Moment (M): 5 kNm

Shear force (Q): 11 kN

Rigidity (E x J): 450 kNm²

Certification: EN 13377

Table 1					Table 2										
Floor thickness (cm)	Floor load * (kN/m ²)	Max. perm. primary beam spacing (m) for secondary beam spacing (m) of				Max. perm. prop spacing (m) for selected primary beam spacing (m) of									
		0.500	0.625	0.667	0.750	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.50
10	4.3	3.69	3.43	3.35	3.22	2.93	2.72	2.50	2.32	2.17	2.04	1.88	1.71	1.57	1.34
12	4.7	3.49	3.24	3.17	3.05	2.77	2.57	2.37	2.20	2.05	1.87	1.69	1.53	1.41	—
14	5.2	3.33	3.09	3.03	2.91	2.65	2.46	2.26	2.09	1.91	1.70	1.53	1.39	1.27	—
16	5.7	3.20	2.97	2.91	2.79	2.54	2.36	2.16	2.00	1.75	1.55	1.40	1.27	1.16	—
18	6.2	3.08	2.86	2.80	2.69	2.45	2.27	2.07	1.84	1.61	1.43	1.29	1.17	—	—
20	6.7	2.98	2.77	2.71	2.61	2.37	2.18	1.99	1.70	1.49	1.33	1.19	1.08	—	—
22	7.2	2.90	2.69	2.63	2.53	2.30	2.11	1.85	1.59	1.39	1.24	1.11	1.01	—	—
24	7.7	2.82	2.61	2.56	2.46	2.24	2.04	1.73	1.49	1.30	1.16	1.04	0.95	—	—
26	8.2	2.75	2.55	2.49	2.40	2.18	1.96	1.63	1.40	1.22	1.09	0.98	—	—	—
28	8.7	2.68	2.49	2.44	2.34	2.13	1.85	1.54	1.32	1.15	1.03	0.92	—	—	—
30	9.2	2.62	2.44	2.38	2.29	2.08	1.75	1.46	1.25	1.09	0.97	0.87	—	—	—
35	10.5	2.50	2.32	2.27	2.18	1.91	1.52	1.27	1.09	0.95	0.85	—	—	—	—

* Based on EN 12812, numbers refer to solid concrete floor slabs with live loads of 0.75 kN/m² and min. variable loads of 10 %, min. 0.75 kN/m² but not to exceed 1.75 kN/m² (with 2.5 kN/m³ fresh concrete slab bulk density). The mid-span deflection has been limited to l/500. Significantly lower floor loads are produced in hollow floor slabs.



Elementary safety warnings

User target groups

- This manual is aimed at all persons who will be working with the Form-on products that it describes.
- All persons working with the product described herein must be familiar with the contents of this manual and with all the safety instructions it contains.

Regulations/industrial safety

- Always observe all industrial safety regulations and other safety rules applying to the application and utilisation of our products in the country and/or region in which you are operating.

Rules applying during all phases of the assignment

- The customer must ensure that this product is erected and dismantled, reset and generally used for its intended purpose under the direction and supervision of suitably skilled persons with the authority to issue instructions. These persons' mental and physical capacity must not in any way be impaired by alcohol, medicines and drugs.
- Form-on products are technical working appliances which are intended for industrial/commercial use only, always in accordance with the respective Form-on user information booklets or other technical documentation authored by Form-on.
- The stability of all components and units must be ensured during all phases of the construction work!
- The functional/technical instructions, safety warnings and loading data must all be strictly observed and complied with. Failure to do so can cause accidents and severe (even life-threatening) damage to health, as well as very great material damage.
- Fire-sources are not permitted anywhere near the formwork. Heating appliances are only allowed if properly and expertly used, and set up a safe distance away from the formwork.
- The work must take account of the weather conditions (e.g. risk of slippage). In extreme weather, steps must be taken in good time to safeguard the equipment, and the immediate vicinity of the equipment, and to protect employees.

Assembly

- The assembly work must be carried out by suitably qualified employees of the client's.
- It is not permitted to modify Doka products; any such modifications constitute a safety risk.

Erecting the formwork

- Form-on products must be set up in such a way that all loads upon them are safely transferred!

Pouring

- Do not exceed the permitted fresh-concrete pressures. Excessively high pouring rates lead to formwork overload, cause greater deflection and risk causing.

Striking the formwork

- Do not strike the formwork until the concrete has reached sufficient strength and the person in charge has given the order for the formwork to be struck!
- When striking the formwork, do not endanger the stability of any part of the structure, or of any scaffolding, platforms of formwork that is still in place!

Transporting, stacking and storing

- Observe all regulations applying to the handling of formwork and scaffolding.
- Remove any loose parts or fix them in place so that they cannot be dislodged or fall free!

Maintenance

- Repairs may only be carried out by the manufacturer.

Miscellaneous

- We reserve the right to make alterations in the interests of technical progress.




Instructions for assembly and use

Form-on smartBEAM 20

Form-on smartBEAM 20 can be used only as formwork beams for floor and wall formwork and only when subjected to the loads occurring in situations of direct support for floor or wall formwork in structural concreting, but not for higher individual loads (e.g. safety beams). In order to maximise durability, it is important to handle the components with due care; this applies particularly when stripping out floor-slab formwork.

Practical example

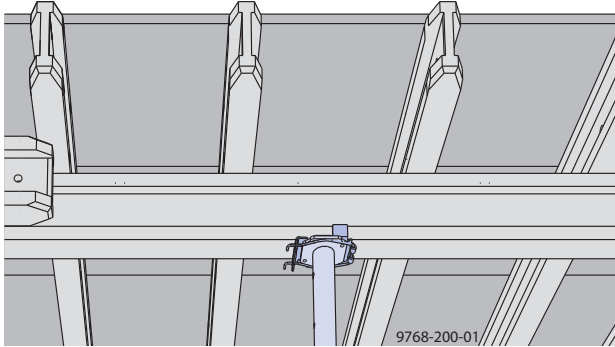

To prevent any staying of the concrete from direct contact with new formwork beams, we recommend covering the formwork beams with a non-woven fabric.

Possible incorrect usages



WARNING

Use Form-on beams only in the “upright” position. The only exceptions to this rule are use cases explicitly permitted in Form-on documents. (e.g. in formwork for casting drop beams with the Beam forming support 20, etc.)





WARNING

The uses illustrated below are prohibited, as are other, similar uses!

Do not use as scaffold flooring.



Do not use as traffic-route flooring.





Correct “upright” positioning (load direction is parallel to web plane).

Incorrect positioning “turned on side” (load direction at right angles to web plane).



Wall formwork




Floor formwork




No butt joints permitted (e.g. on screw-jack U-heads)



Supported length a of the beam ≥ 15 cm permitted.



Supported length a of the beam < 15 cm not permitted.



Reprocessing scrap material

Form-on smartBEAM 20 formwork beams contain no wood preservatives and, consequently, they can be deposited for reprocessing. Reprocessing by incineration in suitable incineration plants is recommended. It is advisable not to attempt to burn scrap material in open fires or domestic woodburners. Always comply with the applicable local or national regulations.

Formwork and Scaffolding

ACROW Soldier WS10



ACROW Soldier WS10

No	Item	Length (m)	Weight (kg)	Code No.
1	Solider][10 0.73 m	0.73	15.95	1HTS1010073
2	Solider][10 0.98m	0.98	21.23	1HTS1010098
3	Solider][10 1.23m	1.23	26.51	1HTS1010123
4	Solider][10 1.48m	1.48	31.77	1HTS1010148
5	Solider][10 1.73m	1.73	37.03	1HTS1010173
6	Solider][10 1.98m	1.98	42.63	1HTS1010198
7	Solider][10 2.23m	2.23	47.93	1HTS1010223
8	Solider][10 2.48 m	2.48	53.23	1HTS1010248
9	Solider][10 2.73m	2.73	58.53	1HTS1010273
10	Solider][10 2.98 m	2.98	64.12	1HTS1010298
11	Solider][10 3.48m	3.48	74.72	1HTS1010348
12	Solider][10 3.98m	3.98	85.74	1HTS1010398
13	Solider][10 4.48m	4.48	96.36	1HTS1010448
14	Solider][10 4.98m	4.98	106.96	1HTS1010498
15	Solider][10 5.48m	5.48	117.56	1HTS1010548
16	Solider][10 5.98m	5.98	127.88	1HTS1010598

LENGTH (m)	SHAPE
0.73	
0.98	
1.23	
1.48	
1.78	
1.98	
2.23	
2.48	
2.78	
2.98	
3.48	
3.98	
4.48	
4.98	
5.48	
5.98	

PROPERTIES OF SECTION

Painted blue

Area of Section

27.00 cm²

Moment of inertia (I_x)

412.0cm⁴

Section Modulus (Z_x)


82.4 cm³

Permissible Bending Moment = Allowable Stress x (Z_x)

13.50 KN.m

Permissible Shear force= Allowable Stress x (A web)

100.00 KN.



Head Office, Factory & Design Sector:

Wady Houf, Helwan, Egypt.
Tel.: (+202) 3690 616 - 3690 739
(+202) 3695 700 - 3699 976
Fax: (+202) 3695 260
e-mail: info@acrowmisr.com
design@acrowmisr.com
hire@acrowmisr.com
website: www.acrowmisr.com

Commercial Sector:

57 El Falaki st., Cairo, Egypt.
Tel.: (+202) 393 8181 - 3930 418 Fax: (+202) 3921 546
e-mail: sales@acrowmisr.com

Alex. Branch

27 Dr. Mahmoud Daoud st.,
Tel.: (+203) 4200 489
e-mail: alex@acrowmisr.com

Portsaid Branch:

Freeport Bld.,
Tel.: (+2066) 3232 542
email: portsaid@acrowmisr.com

Kuwait:

Khalid Ali, Al Kharafi & Bros. co. W.L.L.
Tel.: (+965) 4813 127 - 4817 289
Fax: (+965) 4835 501 KT
e-mail: kuwait@acrowmisr.com

Qatar:


Acrow Qatar
Tel.: (+974) 4506 442
Fax: (+974) 4506 441
e-mail: acrowqatar@acrowmisr.com

Saudia Arabia:


Ebtokarat (E.C.C.)
Tel. & Fax: (+966) 2691 85 45
e-mail: acrow.saudi@acrowmisr.com

U.A.E.:


Acrow Gulf
Tel. & Fax: (+971) 4343 94 97
e-mail: acrow.gulf@acrowmisr.com

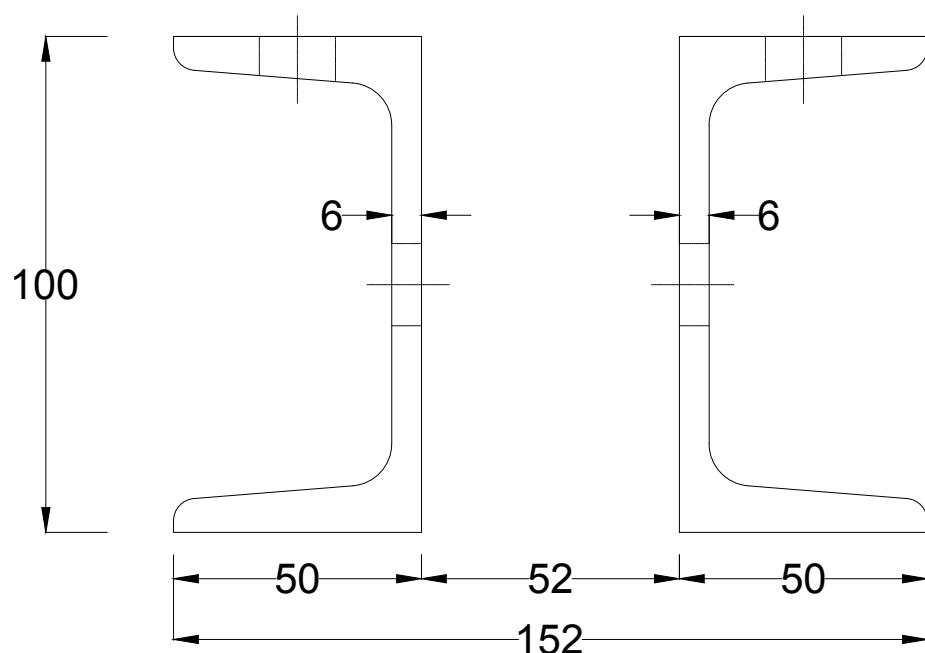

Typical Section

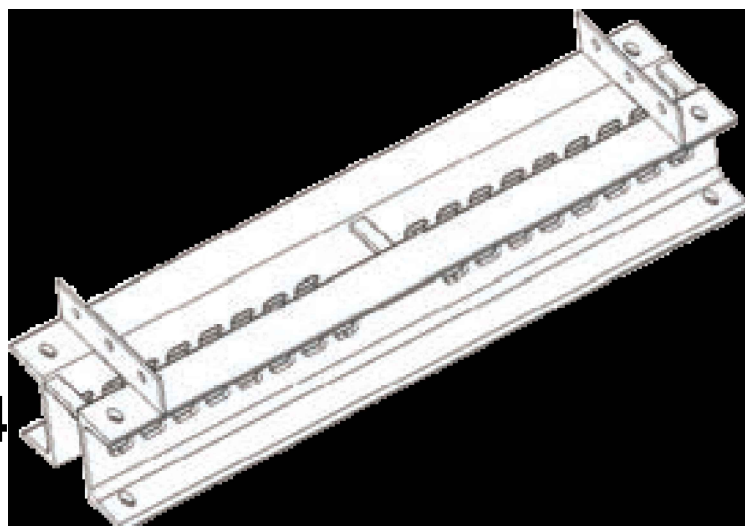


- * **Material** : St 44
- * **Wt/m'** = 22.00 kg
- * **I_x** = 412.00 cm⁴
- * **Z_x** = 82.40 cm³
- * **A web** = 12.00 cm²
- * **F** = 1.6 t/ cm²
- * **Mr** = 1.32 m.t
- * **Q all.** = 11.50 t



Tech Data

*Load Capacity = 100 kg /m²

*Weight = 9.00kg

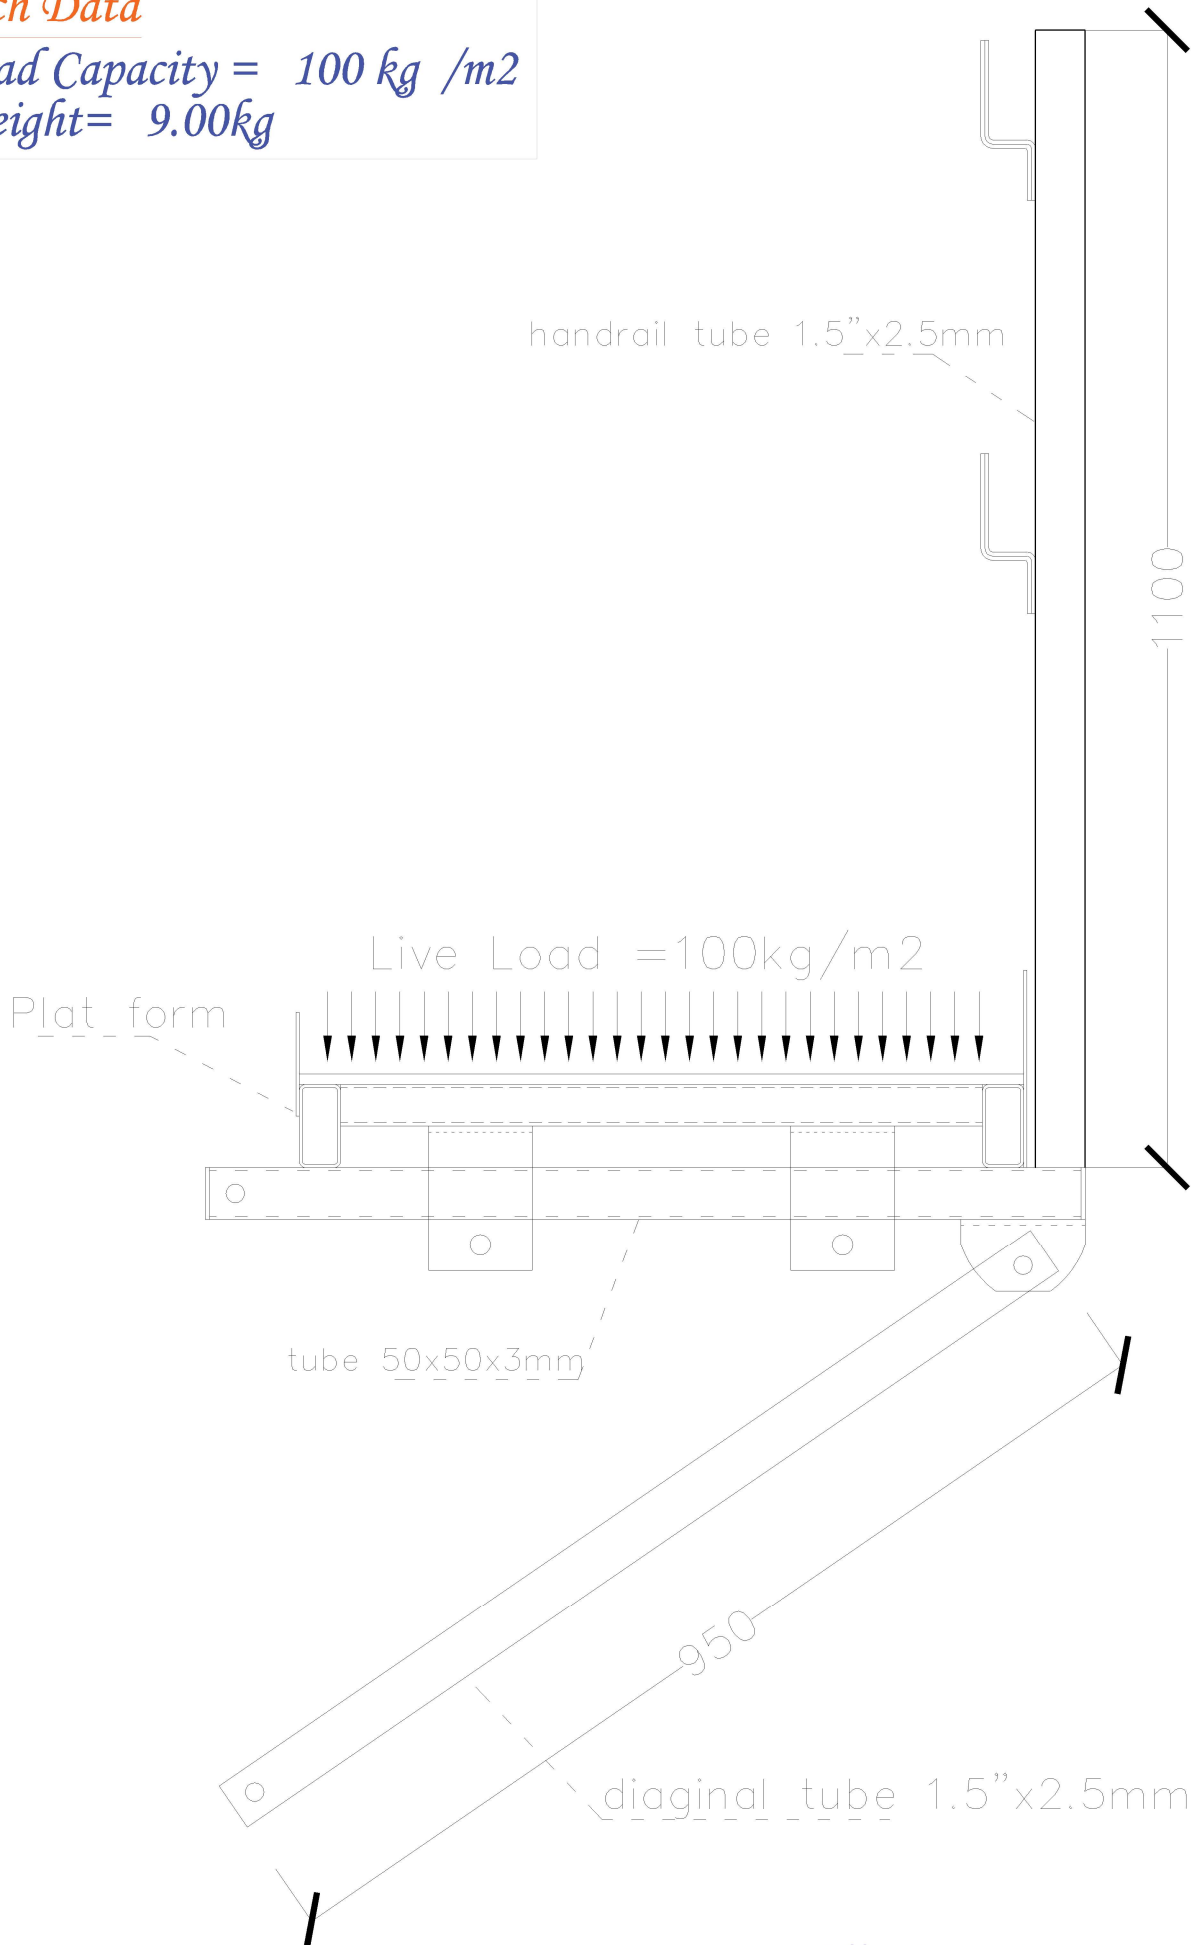

All Dimensions Are In (mm)

ACROW Parawork Technology		PUSH PULL PPS &PPH (NEW)			
Technical Sector					
Design Management					
NO	PUSH PULL	TUBE	Tube Length (m)	RANGE	Working Load (ton)
1	PPS131	1.5"x2.5mm	0.85	1.10	3.60
				1.20	3.45
				1.30	3.30
				1.40	3.14
				1.50	2.98
				1.60	2.82
				1.70	2.66
				1.10	4.91
				1.20	4.78
				1.30	4.64
				1.40	4.50
				1.50	4.35
2	PPS132	2.0"x2.5mm	0.85	1.60	4.19
				1.70	4.04
				1.30	3.30
				1.40	3.14
				1.50	2.98
				1.60	2.82
3	PPS161	1.5"x2.5mm	1.15	1.70	2.66
				1.80	2.50
				1.90	2.34
				2.00	2.18
				1.30	4.64
				1.40	4.50
4	PPS162	2.0"x2.5mm	1.15	1.50	4.35
				1.60	4.19
				1.70	4.04
				1.80	3.88
				1.90	3.71
				2.00	3.55
5	PPS201	1.5"x2.5mm	1.49	1.70	2.66
				1.80	2.50
				1.90	2.34
				2.00	2.18
				2.10	2.02
				2.20	1.87
				2.30	1.72
				1.70	4.04
				1.80	3.88
				1.90	3.71
				2.00	3.55
				2.10	3.38
6	PPS202	2.0"x2.5mm	1.49	2.20	3.22
				2.30	3.05
				2.40	2.89
				2.50	2.73
				2.60	2.57
				2.70	2.42
7	PPS252	2.0"x2.5mm	1.99	2.80	2.27
				2.70	2.42
				2.80	2.27
				2.90	2.11
				3.00	1.97
				3.10	1.85
8	PPS302	2.0"x2.5mm	2.5	3.20	1.73
				3.30	1.63
				3.40	1.54
				3.50	1.45
				3.60	1.37
				3.70	1.30
9	PPS352	2.0"x2.5mm	2.99	3.80	1.23


ACROW Permanence Tubes 887		PUSH PULL PPS &PPH (NEW)			
Technical Sector					
Design Management					
NO	PUSH PULL	TUBE	Tube Length (m)	RANGE	Working Load (ton)
10	PPH163	3.0"x3mm	1.15	1.35	8.83
				1.45	8.70
				1.55	8.56
				1.65	8.42
				1.75	8.27
				1.85	8.12
				1.95	7.96
				2.00	7.87
11	PPH164	3.0"x4mm	1.15	1.35	11.61
				1.45	11.44
				1.55	11.25
				1.65	11.06
				1.75	10.86
				1.85	10.65
				1.95	10.44
				2.00	10.33
12	PPH203	3.0"x3mm	1.49	1.70	8.35
				1.80	8.20
				1.90	8.04
				2.00	7.87
				2.10	7.71
				2.20	7.54
				2.30	7.36
13	PPH204	3.0"x4mm	1.49	1.70	10.96
				1.80	10.76
				1.90	10.55
				2.00	10.33
				2.10	10.10
				2.20	9.87
				2.30	9.64
14	PPH205	3.0"x3mm	1.85	2.05	7.79
				2.15	7.62
				2.25	7.45
				2.35	7.27
				2.45	7.09
				2.55	6.91
				2.65	6.72
15	PPH206	3.0"x4mm	1.85	2.05	10.22
				2.15	9.99
				2.25	9.76
				2.35	9.52
				2.45	9.28
				2.55	9.03
				2.65	8.78
16	PPH253	3.0"x3mm	1.99	2.20	7.54
				2.30	7.36
				2.40	7.18
				2.50	7.00
				2.60	6.81
				2.70	6.63
				17	PPH254
2.30	9.64				
2.40	9.40				
2.50	9.15				
2.60	8.91				
2.70	8.66				
18	PPH303	3.0"x3mm	2.50		
				2.80	6.44
				2.90	6.25
				3.00	6.06
				3.10	5.87
				3.20	5.68
				3.30	5.49
19	PPH304	3.0"x4mm	2.50	2.70	8.66
				2.80	8.41
				2.90	8.15
				3.00	7.90
				3.10	7.64
				3.20	7.39
				3.30	7.14
20	PPH353	3.0"x3mm	2.99	3.20	5.68
				3.30	5.49
				3.40	5.30
				3.50	5.11
				3.60	4.92
				3.70	4.74
				3.80	4.55
21	PPH354	3.0"x4mm	2.99	3.20	7.39
				3.30	7.14
				3.40	6.88
				3.50	6.63
				3.60	6.39
				3.70	6.14
				3.80	5.90

ACROW Permanence Tubes 607		PUSH PULL PPS &PPH (NEW)			
Technical Sector					
Design Management					
NO	PUSH PULL	TUBE	Tube Length (m)	RANGE	Working Load (ton)
22	PPH403	3.0"x3mm	3.50	3.70	4.74
				3.80	4.55
				3.90	4.37
				4.00	4.20
				4.10	4.02
				4.20	3.85
23	PPH404	3.0"x4mm	3.50	4.30	3.66
				3.70	6.14
				3.80	5.90
				3.90	5.66
				4.00	5.42
				4.10	5.19
24	PPH454	3.0"x4mm	4.00	4.20	4.95
				4.30	4.72
				4.20	4.93
				4.40	4.49
				4.50	4.29
				4.60	4.11
25	PPH501	3.0"x3mm	4.50	4.70	3.94
				4.80	3.77
				4.70	3.07
				4.80	2.94
				4.90	2.82
				5.00	2.71
26	PPH502	3.0"x4mm	4.50	5.10	2.60
				5.20	2.50
				5.30	2.41
				4.70	3.95
				4.80	3.79
				4.90	3.63
27	PPH551	3.0"x3mm	5.00	5.00	3.49
				5.10	3.35
				5.20	3.23
				5.30	3.11
				5.20	2.50
				5.30	2.41
28	PPH552	3.0"x4mm	5.00	5.40	2.32
				5.50	2.24
				5.60	2.16
				5.70	2.08
				5.80	2.01
				5.20	3.23
29	PPH601	4.0"x3mm	5.50	5.30	3.11
				5.40	2.99
				5.50	2.88
				5.60	2.78
				5.70	2.69
				5.80	2.59
30	PPH602	4.0"x4mm	5.50	5.70	4.53
				5.80	4.38
				5.90	4.23
				6.00	4.09
				6.10	3.96
				6.20	3.83
31	PPH651	4.0"x3mm	5.90	6.30	3.71
				6.40	3.59
				6.50	3.48
				6.60	3.38
				6.70	3.28
				6.80	3.18
32	PPH652	4.0"x4mm	5.90	6.90	3.09
				6.10	5.14
				6.20	4.97
				6.30	4.82
				6.40	4.67
				6.50	4.52

Product Name: CAX Tie Rod 15/17mm
Catalogue Number: 115
Model Name: **CAX**

Product Description

The Hot Rolled Weldable Tie Rod is used to attach two sides of the formwork panels during the pouring of the concrete. It is always used together with the Tie Rod Nuts. A sketch and drawing are provided below.



Material	235/275
Weight (kg/m)	9.38
d _n mm	14/16/17
d _h mm	15/17/20
p mm	1.5/1.75
d _h mm	14/16/17
W	80/100
1 mm	10/12
d _h mm	15/17

Trademark:

CAX is the brand created under the roof of ARI LTD Company, especially for the tie rod and accessories product line

Quality Control:

Material Test:

The chemical and mechanical properties of raw steel are controlled before the rolling of the product.

Load Test:

The breaking load is controlled frequently by the Turkish Standard Institute according to DIN18216 requirements. Minimum value must be 190 kN.


Standard length	6 meters
Unit weight	1.42 kg/m
Finishing	Raw (black)
Standard Packaging	100 pcs of 6m per batch
Weldability	Yes
Hot Rolled	Yes
Working Load	Max. 90 kN
Ultimate Break load	Min. 190 kN

Product Photo:



ACROW BOLT DATA SHEET


NO.	PRODUCT CODE	ITEMNAME	LENGTH (CM)	DIAMETER (MM)	MAX. WORKING TENSILE LOAD (KN)
1	6221177000011	Acrow Bolt , L= 8 cm DVD	8	16	50
2	6221177000054	Acrow Bolt , L=18 cm DVD	18	16	50
3	6221177000060	Acrow Bolt , L=21 cm DVD	21	16	50
4	6221177000059	Acrow Bolt , L=30 cm DVD	30	16	50

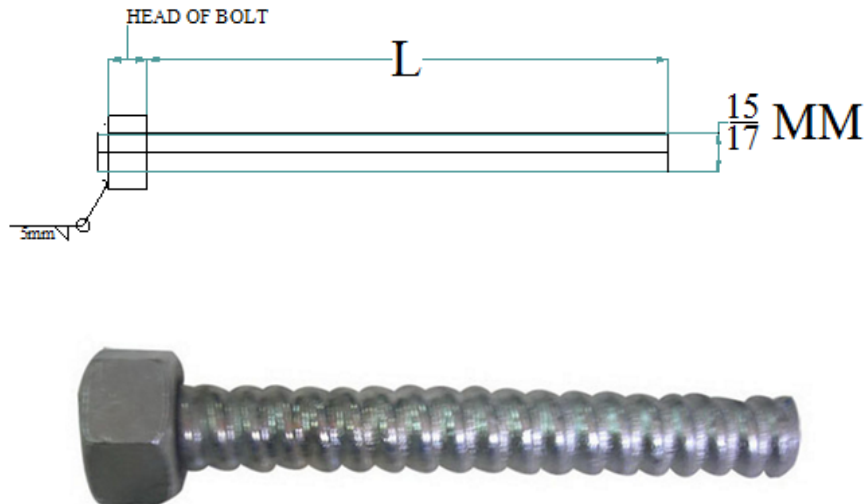

MATERIAL : Steel 25G2S (Structural steel for welding construct)

MECHANICAL PROPERTIES:

	HARDNESS(HB)	TEN.STRENGTH MPa	YIELD STREN. MPa	ELONGATION %
SPECIFICATION		min 980	min 785	min 7
INSP.RESULT	287-324	1047	939	9

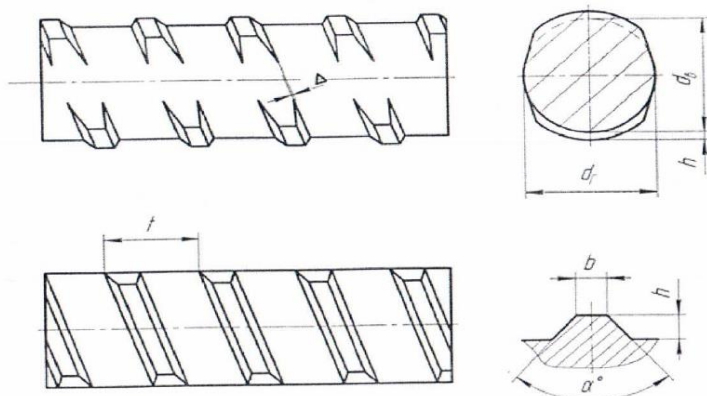

Material	25G2S
Weight, kg/m	1,38
d_b , mm	$14,6 \pm 0,3$
d_r , mm	$14,5^{+0,3}_{-0,8}$
h , mm	$1,2 \pm 0,2$
b , mm	$4,0 \pm 0,2$
α	$80^\circ \pm 10$
t , mm	10 ± 2
Δ , mm	$\pm 0,2$

All Dimensions Are In (mm)