

PLEASE TOUCH THE SCREEN



Flovv-e

Stats



210 °C



70 °C 55 °C



65 °C



Print-File.gcode

Time Elapsed: 4h 21m

Time Left: 6h 3m



Speed 60 mm/s



> 8

START

X STOP













Flovv-e

Stats



210 °C



70 °C 55 °C



65 °C



Print-File.gcode

Time Elapsed: 4h 21m

Time Left: 6h 3m



Speed 60 mm/s



▶ START















Filament Run Out!

Continue

Purge More





File Size Time

Print-File.gcode 12 mb 10h 24m

568 kb 1h 28m Neckog-print-file.gcode















PRINT COMPLETED

DONE



Flovv-e

Material

FOAM

SOLID

FLEX



A Comp. Fill

Clean A

Air A

X RESIN FILL

B Comp. Fill



Clean B



Air B















Mixing in Progress...



X Stop & Back

A Comp. Fill





B Comp. Fill

X Stop & Back

Clean A



X Stop & Back

Clean B

Yes

No

Air A

Pumping...



Yes

No

Pumping...





Did You Push The Button?

Yes

Νo

Air B

Process Completed. Stop Pressing The Button

J DONE

Air B



Flovv-e

Stats




210 °C 185 °C



70 °C 55 °C



65 °C






70 °C

Cool Down

Motor OFF

Pre-Temp

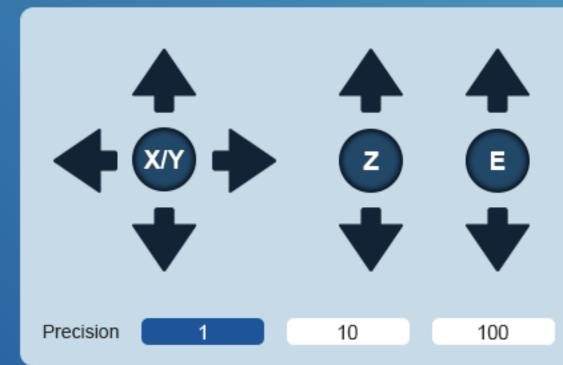

























LOAD

UNLOAD



AUTOBED LEVELING



Z STEPPER AUTO ALIGNMENT



MANUAL BED CALIBRATION



X

Turn Clockwise 3 Turns









MANUAL BED CALIBRATION



Serial Number | 5W65f 1253

Available Networks

Superonline T64A

connected

TTNET - S64A

not connected

Ambient Color




















12345abC



Connect

Done

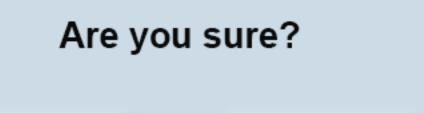

Yes

No



PRINTER HALTED

Please Restart Printer