
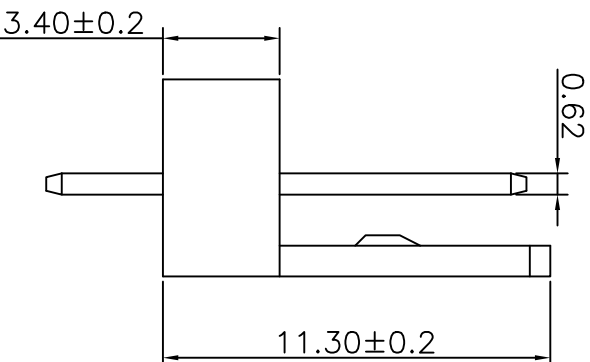


P.C.B LAYOUT

技术参数SPECIFICATIONS
温度范围(Temperature range): -25°C~+85°C
额定电压 (Voltage rating): 250V.Ac/Dc
额定电流 (Current rating): 2.5A.Ac/Dc
接触电阻 (Contact resistance): ≤ 20MΩ
绝缘电阻 (Insulation resistance): ≥1000MΩ
耐压 (Withstand voltage): 1500V.Ac/1min
材料 (Material):
针座 (Wafer): PA66 UL94V-0(2)
插针 (Terminal): 黄铜 (Rhos.bronze Tin/plated)
包装方式 (Package)
散装Loosen Package

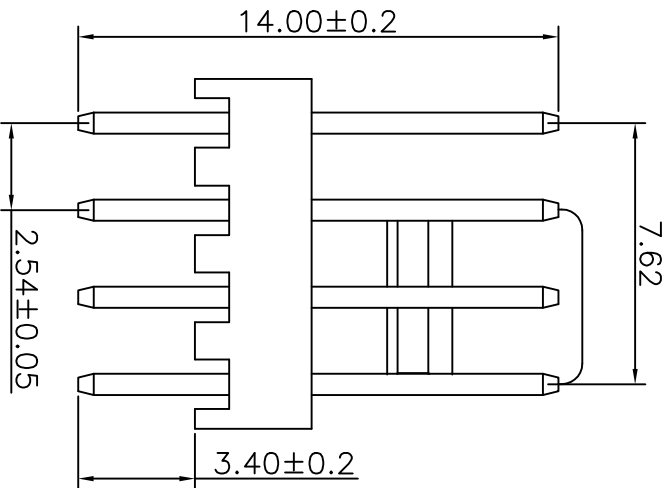

DESCRIPTION(内容):

Wafer2.54 4P 180度错位

PART NO: HAY2510-4A-S02

DWG NO(图号): WLD-DWG-W5-017

DRAWN(制图): David

CHECKED(审核):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差)

XX
XX
XX
ANG

SCALE(比例):
XX:XX



REV: A/O

REV

DESCRIPTION

DATE

UNIT:
mm

1

SIZE:

2

A4

3

SHEET

4

A

B

C

D

E