




Providing clear vision of the changes to IEC 61511

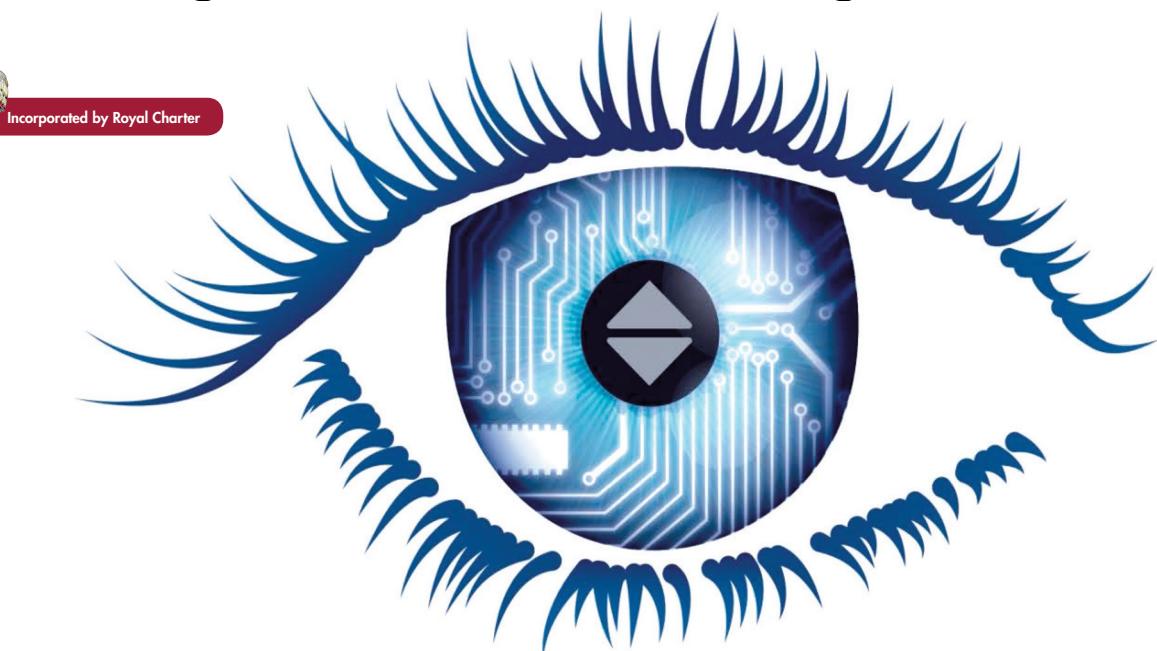

FS Engineer (TÜV Rheinland) courses 2016

SIS: Aberdeen: 05-08 September.
Manchester: 19-22 September
London: 08/09 & 15/16 October **Weekends.**
Aberdeen: 29/30 Oct & 05/06 Nov **Weekends.**
Paris: 29 November – 02 December.
Aberdeen: 05-08 December.

PH&RA: Aberdeen: 12-16 September

C & C Technical Support Services is an accepted course provider of the TÜV Rheinland Functional Safety Training Program.

Email: info@silsupport.com
Or Tel: +44 (0) 13398 86618

View the full Global C&C schedule at:
www.silsupport.com

ON THE COVER

C&C Technical Support Services provide specialist engineering training and consultancy support to the global oil and gas, petrochemical and power generation industries in the application of the IEC 61508 and IEC 61511 standards for Functional Safety.

Globally, C&C is the leading provider of the prestigious TÜV Rheinland Functional Safety Program, and we were one of the first companies approved to offer courses within this program. All of our consultants are FS Senior Expert or FS Expert (TÜV Rheinland) as well as TÜV Rheinland approved trainers.

Our suite of TÜV Rheinland Functional Safety courses include:

1. Functional Safety Engineer (TÜV Rheinland) SIS
2. Functional Safety Engineer (TÜV Rheinland) SIS
3. Functional Safety Technician (TÜV Rheinland) SIS

We provide company specific in-house training or open public training, as well as consultancy services in the UK and overseas, and we have a 'proven-in-use' methodology for undertaking Functional Safety Assessments for FS related projects.

For details of our global training program, course brochures, registration forms and further information about our training and consultancy capabilities contact:
T: +44 (0) 1339 886618
E: info@silsupport.com
W: www.silsupport.com

Communications Board:

Chairman: S. Dennis

Members: K. Burnham, H. Dearden, J. Ho, G. Jones, S. Khan, P. Kyriacou, P. Norman, D. Otterson, G. Philp, R. Summers, H. Wang, S. Yang

Publications Manager:

Danny Henderson

E: publications@instmc.org

News Editor:

James Hunt

E: stok422@hotmail.com

Subscription rates:

Europe: £370 per annum, Overseas: £491 per annum, Individual copies: £52 (Europe), £56 (Overseas). 10 issues per year.

Subscription enquiries:

E: journals@sagepub.com (Journal)

E: admin-subs@instmc.org.uk (Membership)

ISSN: 0020-2940

Published by:

The Institute of Measurement and Control

87 Gower Street, London WC1E 6AF

T: 020 7387 4949 F: 020 7388 8431 www.instmc.org.uk

Founded 1944

Incorporated by Royal Charter 1975

Registered Charity No: 269815

Chief Executive:

Dr Patrick Finlay PhD CEng

E: ceo@instmc.org.uk

Produced by:

SAGE Publications Ltd, 1 Oliver's Yard, 55 City Road, London, EC1Y 1SP

T: +44(0)20 7324 8500

W: www.sagepub.co.uk

© 2016, The Institute of Measurement and Control. Reproduction in whole or part must not be undertaken without the written consent of the Institute. The Institute as a body does not hold itself responsible for the facts or opinions expressed in MEASUREMENT + CONTROL unless it is stated that an article or letter officially represents the views of the Institute.

Measurement+Control

Regulars

168 Commercial News

169 Institute News

176 Interface News

169



171




Contributed Papers

183 Short Term Wind Speed Prediction Based on Artificial Neural Network Models
Ismail Kirbas and Alper Kerem

191 A Circuit Design by Using an Infrared Sensor Transmitter and Pic16f628 to Measure the Pulse Rate of the Driver
Ali Buldu and Kazim Yildiz

185

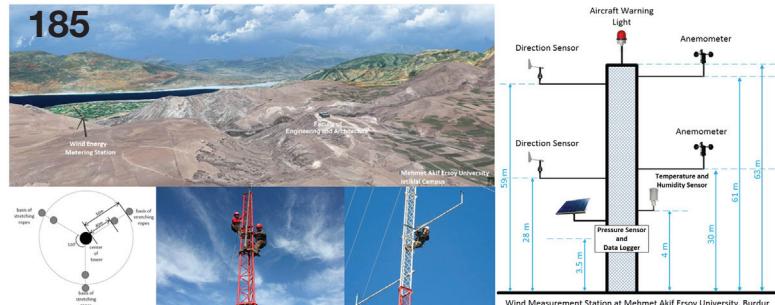



Short-Term Wind Speed Prediction Based on Artificial Neural Network Models

Measurement and Control

2016, Vol. 49(6) 183–190

© The Institute of Measurement

and Control 2016

Reprints and permissions:

sagepub.co.uk/journalsPermissions.nav

DOI: 10.1177/0020294016656891

mac.sagepub.com



Ismail Kirbas

Department of Computer Engineering, Faculty of Engineering and Architecture, Mehmet Akif Ersoy University, Burdur, Turkey
ismailkirbas@mehmetakif.edu.tr

Alper Kerem

Department of Electricity and Energy, K. Vocational High School, Osmaniye Korkut Ata University, Osmaniye, Turkey

Wind energy has an important place in renewable energy sources. Biggest challenges in wind energy production are the variability of the wind and difficulty of estimation of true wind speed. In this study, 25,777 records have been taken from wind measurements carried out at Mehmet Akif Ersoy University campus. Records include meteorological data such as wind speed at different heights/altitudes, wind direction, temperature, pressure and humidity. In order to estimate the wind speed that may occur at 61 m altitude, multilayer perceptron and radial basis function methods have been used. During the application phase, 100 artificial neural networks were trained and performance evaluations of these networks were done. The obtained results show that the wind speed at 61 m can be estimated with 99% accuracy using artificial neural network when other meteorological data are taken as input.

I. Introduction

Increasing world population and developing technology increase the demand for the energy day by day. Countries have turned to renewable energy sources because it is known that the limited amount of energy reserves will decrease in time and damages of these resources to the environment are also known.¹ Wind energy which is one of renewable energy sources is the most advanced and commercially most economical type of renewable energy.²

Obtaining energy from a wind energy conversion system depends on the performance characteristics and operating conditions of the energy conversion system. Due to the unstable nature of the wind, it is not possible to determine the transient response of wind conversion system and to develop a model with wind speed and power

output data. Therefore, wind power generation is closely related to the wind properties of the region even if the performance characteristics of the wind energy conversion system are available. In the case of establishing the model which provides accurate predictions, control of wind turbines used in wind energy production can be achieved, and increases in wind turbines' resistance and operating costs can be reduced. This also provides a more stable, reliable and cheap energy production.

First of all, feasibility study should be conducted to determine wind energy potential of a region. Then, wind measurement station is established to a coordinate considered to be the most efficient in the field, related sensors should be assembled,³ data should be recorded and tracked for at least 12 months, and then it should be analyzed.^{4,5}

In addition to the measured and recorded data, studies to estimate the data in future and back periods have become widespread in recent years. Indeed, when literature studies are analyzed, it is seen that many estimation methods have been used. Ata⁶ analyzed the duration of wind blow (which depends on various parameters) of Akhisar area using artificial neural networks (ANNs). In his study, he has made a comparison between ANNs and the traditional method which uses Rayleigh distribution. Kurban et al.⁷ have analyzed the wind energy potential of the site using Weibull and Rayleigh distribution functions. They calculated the parameters of these distributions using maximum likelihood method. At the end of the study, they saw that Weibull distribution models the wind speed better than Rayleigh. Shamshirband

Short-Term Wind Speed Prediction Based on Artificial Neural Network Models

et al.⁸ have developed a new algorithm base on neuro-fuzzy inference system (ANFIS). Power coefficient of the wind turbine, the rotor speed and blade pitch angle have been chosen as input data for ANFIS. The identified model related to input–output has been observed during offline training. After that, the wind speed has been determined online from momentary inputs. The performance of this smart system has been tested in MATLAB/Simulink environment. It has been shown that the developed algorithm is faster than other forecasting methods. Velo et al.⁹ have used ANN to determine annual average wind speed with current available short-term data. They have used 60-day data for training. According to the simulation results, they have observed annual average wind speed forecasts with less than 6% error rate compared to the actual speed. Alessandrini et al.¹⁰ have developed analog ensemble (AnEn) method in order to generate probabilistic wind power forecasts (WPF). With this study, they have forecast old data which are similar to existing data. Shukur and Lee¹¹ have used ANN and Kalman filter (KF) for the detection of nonlinear and uncertain problems. Hybrid KF-ANN model based on autoregressive integrated moving average (ARIMA) has increased the accuracy of the wind speed forecast. They saw that hybrid KF-ANN model made the most adequate and most accurate prediction compared to its discrete components. Pishgar-Komleh et al.¹² have aimed at analyzing wind speed data in Firouzkoo area and worked on 10-year period data of this area. Weibull and Rayleigh have aimed at determining the most appropriate wind speed data by applying distribution functions. The obtained results are highly successful.

Although there have been many studies related to neural networks carried out in the literature, performance of these networks are usually tried to be compared using one or two network structures. The main contribution of this study is performing the experiments with real data consisting of more than 25,000 records and using of many different

architecture of neural networks. These architectures have different network structures, different hidden layer neuron numbers, different activation and output functions. As a result of the study, test performances of 100 ANNs have been compared and determination of the best successful network architecture has been ensured.

The paper is organized as follows: obtaining of meteorological data such as wind speed, wind direction, temperature and pressure is described in section II. In section III, structures of supervised and unsupervised neural networks have been mentioned. Section IV is the section where performance assessments of developed ANNs are performed, and conclusions are provided in section V.

II. Data Acquisition

Coordinate determination works have carefully been performed in the campus for the construction of wind measurement station in the İstiklal campus of Mehmet Akif Ersoy University. For this purpose, different points in the field have been visited at different times and wind speeds were observed. Based on the criteria in the literature, the most appropriate point at the field has been identified as UTM E 263254 and N 4173479 coordinates at 1313 m altitude. Wind measurement station has been constructed to detect coordinates, and wind speed sensor, wind direction sensor, temperature and humidity sensor, pressure sensor and data logger have been assembled. System has been engaged and data have been tracked. The station which has been constructed is shown in Figure 1(a). Schematic illustration of the measuring stations is given in Figure 1(b).

In this study, wind speed, pressure, temperature, humidity and wind direction measurements carried out for 6 months from February to July 2014 at wind measurement station constructed for measurement have been tried to be analyzed using data mining techniques, and the factors that determine the wind speed have been tried to be determined together with their degrees of influence.

In order to make wind speed forecast, pressure, humidity, temperature, wind direction and wind speed parameters have continuously been measured and measurement averages have been calculated at 10-min intervals. Thus, 25,777 measurement results have been obtained for 6 months. *Table 1* shows the statistical data of said parameters.

The main objective of this study is the measurement of wind speed at the height where wind turbine has been planned to be constructed and forming of a successful model through these measurements. The relationship between wind speed and wind direction at 61 m in *Figure 2(a)* is given as 3D surface graphic. The relationship between wind speed, temperature and pressure value is shown in *Figure 2(b)*. Comparison of wind speed, temperature and pressure is given in *Figure 2(c)*. The linear relationship between the wind speeds at 61 and 31 m can be clearly seen in *Figure 2(d)*.

III. Multilayer Perceptron and Radial Basis Function ANNs

Two basic neural network models have been studied on with the aim of modeling wind speed data at 61 m, which constitutes the subject of the study. Multilayer perceptron (MLP) structure has been used for supervised ANN, and radial basis function (RBF) network structure has been used for unsupervised ANN. Input values of ANNs consist of wind speed at 31 m, wind direction at 29 and 59 m, temperature, humidity and pressure data. The output value gives the wind speed at 61 m. MLP network structure is given in *Figure 3(a)*. RBF network structure is shown in *Figure 3(b)*.

A. MLP networks

An MLP is a feedforward ANN model that maps sets of input data onto a set of suitable outputs. An MLP consists of three or more layers of nodes in a directed graph, with each layer fully connected to the next one. This type of network is called as a fully connected network. Except for the input nodes, each node is

Figure 1. (a) Three-dimensional image of the field work (to scale) and wind measuring station installation procedure. (b) Schematic illustration of the wind measuring station

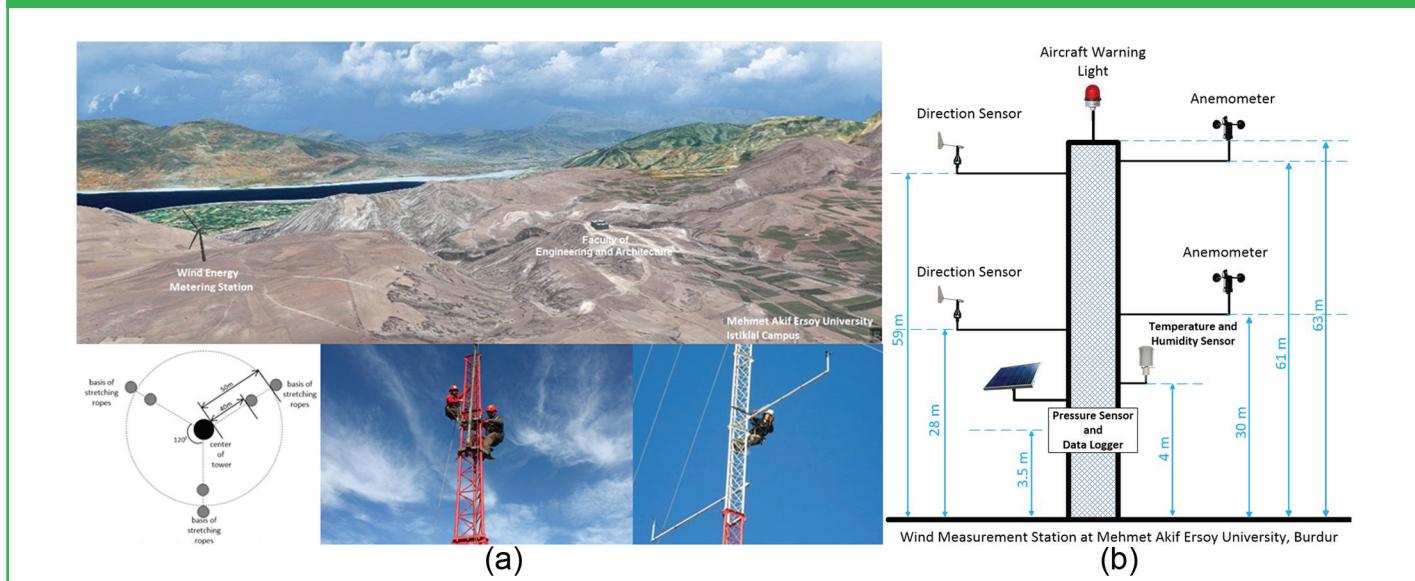


Table 1. Descriptive statistical values for the measured parameters.

Parameter	Mean	Median	Mode	Minimum	Maximum	Standard deviation	Skewness	Kurtosis
Wind speed (at 61 m) (m/s)	5.67	4.88	8.04	0.00	23.31	3.46	1.01	0.99
Wind speed (at 31 m) (m/s)	5.33	4.63	0.00	0.00	22.22	3.24	1.01	1.01
Wind direction (at 29 m) (°)	189.56	150.30	137.60	0.00	360.00	117.51	-0.02	-1.24
Wind direction (at 59 m) (°)	179.21	151.50	144.90	0.00	360.00	117.26	0.05	-1.21
Temperature (°C)	12.32	11.51	10.91	-5.75	31.92	7.58	0.30	-0.63
Humidity (%)	64.01	62.86	94.00	8.18	100.00	21.94	0.00	-1.03
Pressure (mbar)	865.15	865.00	866.00	853.00	873.00	3.32	-0.49	0.54

a processing element or neuron with a nonlinear activation function. MLP utilizes a supervised learning technique called backpropagation for training the network.¹³ In a MLP type network structure, each node in one layer connects with a certain weight w_{ij} to every node in the following layer. Output layer is calculated as shown in Equation (1)

$$y_i = f \left(\sum_{j=1}^m w_{ij} x_j + b_i \right) \quad (1)$$

MLP is applied for solving some difficult and different problems successfully. In this method, error backpropagation

algorithm is usually used as training algorithm. Each neuron model on the network includes nonlinearity at the output. The important point here is that nonlinearity has smooth transition compared to sharp transition function used in Rosenblatt's perceptron. The network has one or more hidden neurons that do not belong to input or output. These hidden neurons allow the network to learn complex works. In the network, each neuron is interconnected. A change in the connections causes the change in synaptic connections and weights. The development of backpropagation algorithm has been a turning point in the


use of neural networks.¹⁴

B. RBF networks

RBF network consists of input layer, hidden layer containing radial basis neurons and output layer mostly consisting of neurons with linear activation function. RBF is a different approach that demonstrates the curve fitting problem in multi-dimensional space. From this perspective, statistically, learning is equivalent to the finding of the most appropriate surface to the training data in multi-dimensional space. While the transformation from input space to

Short-Term Wind Speed Prediction Based on Artificial Neural Network Models

Figure 2. (a) Wind speed versus wind direction relationship, (b) wind speed versus temperature and pressure relationship, (c) wind speed versus temperature and humidity relationship and (d) wind speed versus pressure relationship

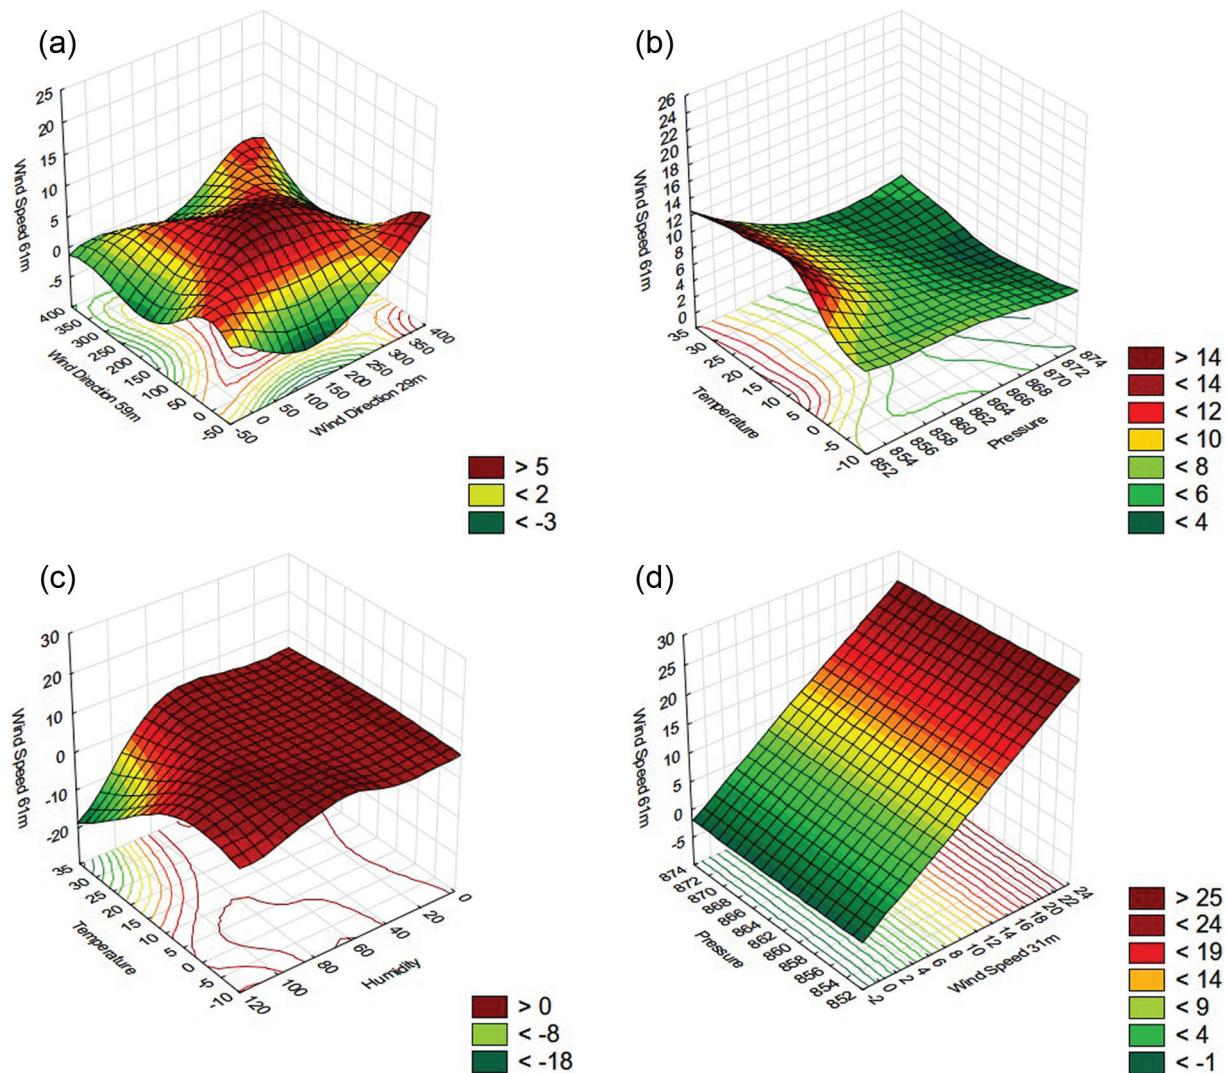

hidden layer space is nonlinear, it is linear from hidden layer space to output space.¹⁵ Output layer is calculated as shown in Equation (2)

$$y_i = \sum_{u=1}^n \varphi_t(\|z - c_u\|) \cdot w_{iu}, \quad i = 1, 2, \dots, k \quad (2)$$

where $z = [z_1, z_2, \dots, z_n]^T$ is input vector, n represents input node number, c_u represents u th central node in the hidden layer, $u = 1, 2, \dots, n$ is the number of nodes in the hidden layer and $\|z - c_u\|$ represents Euclidean distance between c_u and the input vector z . $\varphi_t(\bullet)$ represents nonlinear function, w_{iu}

represents weight value between hidden layer and output node and k represents number of nodes. The output of the network is calculated as the sum of the hidden layer outputs and $\varphi_t(\bullet)$ nonlinear function must be symmetrical. RBF networks are typically trained in two steps. The first step is in the unsupervised form and center vector of RBF function c_u is selected. Center vector selection can be either random or any clustering technique can also be applied. After that, backpropagation learning step is applied and training of network starts.¹⁶

The parameter values in ANNs affect

the results significantly. Selection of the number of nodes forming the network structure and the activation function that enables the relationship between the nodes and output function is important.¹⁷ It is very difficult to predict which parameter values will give better results; therefore, numerous ANN combinations have been tried in this study. Activation and output function types used in the networks are given in Table 2.

Sum of squares error function has been used in order to calculate the error rate of trained networks. The error function used is given in Equation (3). Here, d_k is the

Figure 3. The structure of neural network: (a) a multilayer perceptron network and (b) a radial basis function network

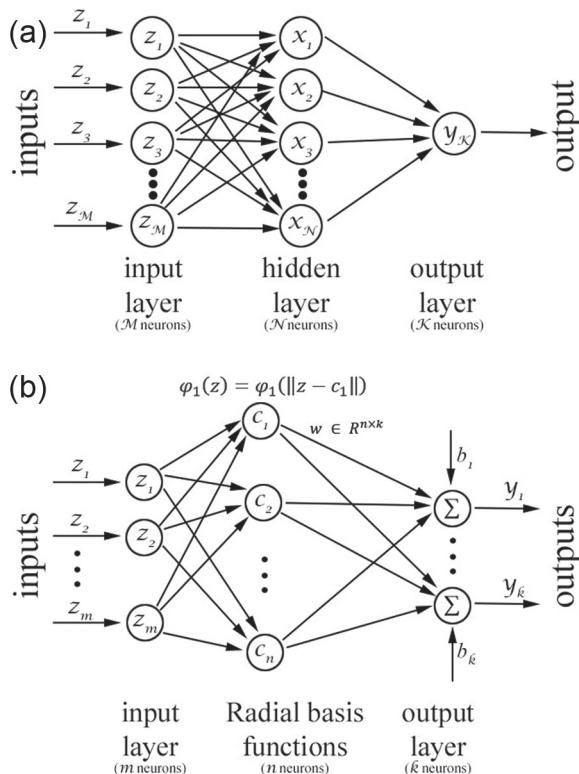


Table 2. The evaluated hidden activation and output activation functions and their equations.

Function name	Equation
Identity	$f(x) = x$
Logistic	$f(x) = \frac{1}{1 + e^{-x}}$
Exponential	$f(x) = e^{-x}$
Tanh	$f(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}}$
Sinusoid	$f(x) = \sin x$
Gaussian	$f(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{(x-\mu)^2}{2\sigma^2}}$

target value for dimension k

$$E(t) = \frac{1}{2} \sum_{k=1}^K (d_k(t) - y_k(t))^2 \quad (3)$$

IV. Performance Evaluation

Within the scope of the study, a total of 100 ANNs which have different network structures, different number of hidden nodes and different activation and output functions have been used. For the training of neural networks, 60%, 20% and 20% of the total data have been randomly allocated and used for training, validation and test, respectively.

As a result of training, validation and test operations performed using neural network characteristic of Statistica program, performance values, the number of hidden nodes and activation and output functions are listed from most successful one to the least successful

one. In the study, 50 pieces of MLP and 50 pieces of RBF type artificial neural networks have been created and trained. After the training and testing operations, evaluation data related to 20 ANNs which have most successful test performance are given in Table 3.

Sum of squares method has been used as error function for all ANNs used in the evaluation. While the number of hidden nodes for MLP networks has been selected between 3 and 20, RBF node has been used for RBF between 21 and 30.

On analyzing Table 3, it can be seen that MLP is the most successful and stable network structure for modeling of wind speed. It is seen that successful results have generally been obtained for MLP structure with the use of tangent hyperbolic as the activation function. As output function, logistic and exponential activation functions stand out. However, there is no significant difference in success between these functions.

Performance graph for each of the two network structures can be seen in Figure 4. Accordingly, it can be seen that the networks formed according to MLP method can be trained in a stable way and very successful test results are obtained.

When the obtained results are analyzed, it can be seen that the wind speed at 61 m can be calculated with 99% accuracy using ANN. Residual distribution of obtained models is suitable for normal distribution. The comparison of estimated wind speeds obtained using trained ANNs and measured wind speeds is given in Figure 5.

Pearson correlation coefficient value (r) for RBF and MLP test values is calculated as 0.44585 using Equation (4)

$$r_{xy} = \frac{n \sum x_i y_i - \sum x_i \sum y_i}{\sqrt{n \sum x_i^2 - (\sum x_i)^2} \sqrt{n \sum y_i^2 - (\sum y_i)^2}} \quad (4)$$

When Figure 5 is analyzed, it is more clearly seen that MLP models are more successful than RBF models for 61 m wind speed output.

Table 3. Training results and structural properties of the best 10 results for supervised and unsupervised ANNs.

Number of hidden nodes	Training perf.	Test perf.	Validation perf.	Training error	Test error	Validation error	Training algorithm	Hidden activation	Output activation
20	0.994903	0.994462	0.994834	0.061175	0.064892	0.062682	BFGS 353	Tanh	Logistic
20	0.994909	0.994449	0.994839	0.061104	0.065052	0.062600	BFGS 352	Tanh	Logistic
20	0.994786	0.994418	0.994732	0.062581	0.065369	0.063915	BFGS 499	Logistic	Sine
18	0.994721	0.994360	0.994670	0.063356	0.066089	0.064676	BFGS 375	Tanh	Sine
16	0.994635	0.994279	0.994595	0.064377	0.067001	0.065562	BFGS 401	Logistic	Tanh
12	0.994708	0.994251	0.994766	0.063508	0.067358	0.063479	BFGS 581	Tanh	Exponential
18	0.994625	0.994249	0.994594	0.064502	0.067354	0.065572	BFGS 457	Logistic	Tanh
13	0.994558	0.994180	0.994598	0.065305	0.068184	0.065529	BFGS 352	Tanh	Identity
19	0.994605	0.994179	0.994586	0.064738	0.068207	0.065710	BFGS 368	Exponential	Logistic
16	0.994615	0.994173	0.994621	0.064633	0.068230	0.065243	BFGS 231	Tanh	Exponential
21	0.933355	0.930085	0.930672	0.775193	0.791884	0.813297	RBFT	Gaussian	Identity
21	0.924160	0.920966	0.922569	0.877956	0.890898	0.904323	RBFT	Gaussian	Identity
21	0.916614	0.914428	0.912485	0.961524	0.961759	1.017263	RBFT	Gaussian	Identity
23	0.910622	0.907270	0.901801	1.027395	1.037883	1.133656	RBFT	Gaussian	Identity
21	0.878707	0.874521	0.874429	1.370970	1.381429	1.428904	RBFT	Gaussian	Identity
23	0.863954	0.864939	0.861933	1.525643	1.478520	1.560182	RBFT	Gaussian	Identity
27	0.395847	0.416894	0.388906	66258.474770	59274.094880	57902.916923	RBFT	Gaussian	Identity
26	0.363908	0.340256	0.348920	309346.954201	266185.559290	325370.333745	RBFT	Gaussian	Identity
24	0.247097	0.243592	0.257267	90042.529076	91057.404873	95411.015858	RBFT	Gaussian	Identity
23	0.191667	0.197151	0.205673	165980.166836	183218.744023	180359.305356	RBFT	Gaussian	Identity

V. Conclusion

With this study, the most accurate modeling of the wind speed which will affect the wind tribune planned to be placed at 61 m height is assured using meteorological data such as wind direction, temperature, pressure and wind speed at 31 m. For this purpose, two different methodologies—supervised and unsupervised—have been used. In this context, a total of 100 ANNs have been created and these networks have been trained and tested using total 25,777 real value data. Five different activation and output functions have been used along with hidden nodes between 3 and 20 for total 50 networks

formed by MLP method. Test performance of the 10 most successful MLP networks is 99% and above. Hidden nodes between the numbers of 21 and 30 have been used for total 50 ANNs formed by RBF method; Gaussian function has been preferred as activation function, and identity function has been preferred as output function. When performance test results are compared, it is determined that the test success values of the networks which use MLP approach are more successful than ANNs which use RBF approach. As a result of the study, it can be seen that a parameter such as wind speed which is highly variable and difficult to estimate can be successfully modeled using



ANNs and reliable estimations can be made for the short term. Thus, it is shown that when basic meteorological data such as temperature, pressure and wind direction are known, wind speed at desired altitude can be estimated using ANNs.

Acknowledgements

The authors thank project coordinator Prof. Dr Serdar Salman who provided insight and expertise that greatly assisted the research.

Funding

This research was supported by West Mediterranean Development Agency (BAKA, Project Number: TR61/13/DFD/036) and Mehmet Akif Ersoy

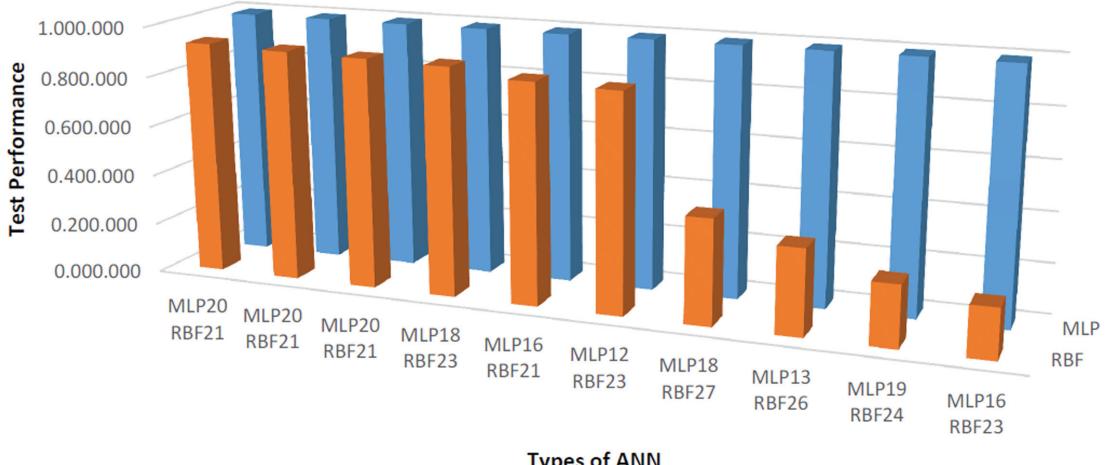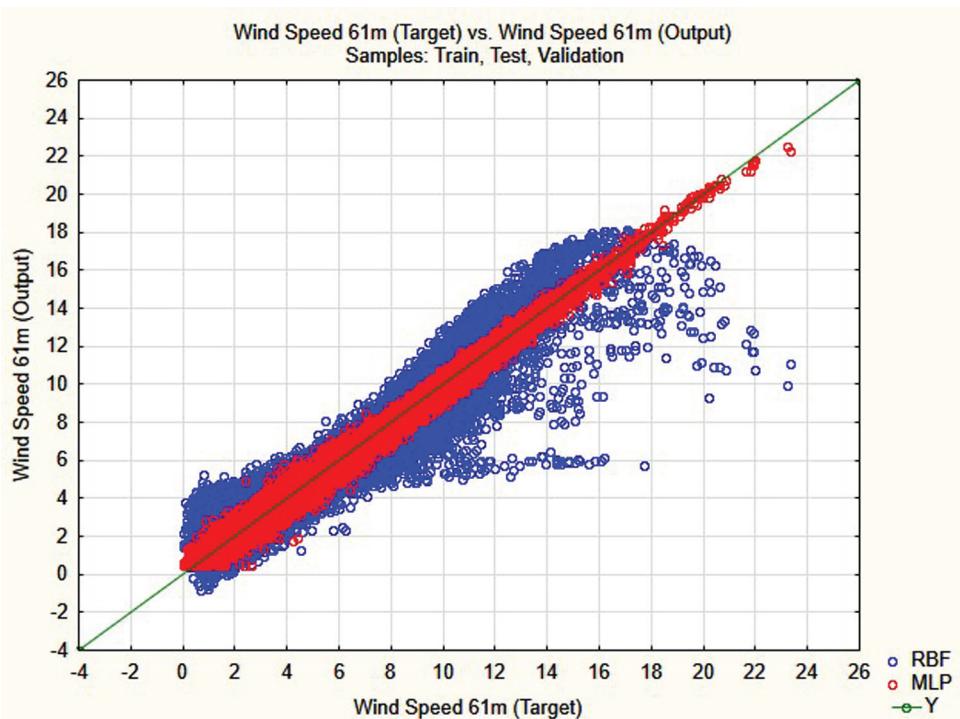Figure 4. Test performance evaluation for MLP and RBF networks**Figure 5.** Wind speed at 61 m target and output comparison for the best RBF and MLP networks

University Scientific Research Projects Commission (Project Number: 0212-Gudumlu-13).

References

1. Kerem A, Atayeter Y, Görgülü S, Salman S. Preparation and implementation of wind energy feasibility infrastructure of Mehmet Akif Ersoy University, İstiklal Campus. *The Journal of Graduate School of Natural Applied Science of Mehmet Akif Ersoy University* 2014; 5(1): 18–24.
2. Yılmaz M. Türkiye'nin Enerji Potansiyeli ve Yenilenebilir Enerji Kaynaklarının Elektrik Enerjisi Üretimi Açısından Önemi. *Ankara Üniversitesi Çevrebilimleri Dergisi* 2012; 4(2): 33–54.
3. Kerem A. Rüzgar Enerjisi Potansiyeli Belirleme Çalışması: Mehmet Akif Ersoy Üniversitesi Örneği (BURDUR). *Rüzgar Enerjisi Dergisi*, RE02: 22–25, 2015.
4. Genç A, Murat E, Pekgör A, Oturanc G, Hepbaşlı A, et al. Estimation of wind power potential using Weibull Distribution. *Energy Sources* 2005; 27: 809–22.

Short-Term Wind Speed Prediction Based on Artificial Neural Network Models

5. Özerdem B, Turkeli HM. Wind energy potential estimation and micrositting in Izmir Institute of Technology Campus, Turkey. *Renewable Energy* 2005; 30(10): 1623–33.
6. Ata R. Neural prediction of wind blowing durations based on average wind speeds for Akhisar location. *Pamukkale University Journal of Engineering Sciences* 2014; 20(5): 162–5.
7. Kurban M, Hocaoğlu FO, Kantar YM. The comparative analysis of two different statistical distributions used to estimate the wind energy potential. *Pamukkale University Journal of Engineering Sciences* 2007; 13(1): 103–9.
8. Shamshirband S, Petkovic D, Anuar NB, Kiah MLM, Akib S, et al. Sensorless estimation of wind speed by adaptive neuro-fuzzy methodology. *Electrical Power and Energy Systems* 2014; 62: 490–5.
9. Velo R, López P, Maseda F. Wind speed estimation using multilayer perception. *Energy Conversion and Management* 2014; 81: 1–9.
10. Alessandrini A, Monache LD, Sperati S, Nissen JN. A novel application of an analog ensemble for short-term wind power forecasting. *Renewable Energy* 2015; 76: 768–81.
11. Shukur OB, Lee MH. Daily wind speed forecasting through hybrid KF-ANN model based on ARIMA. *Renewable Energy* 2015; 76: 637–47.
12. Pishgar-Komleh SH, Keyhani A, Sefeedparsi P. Wind speed and power density analysis based on Weibull and Rayleigh Distributions (A case study: Firouzkoooh County of Iran). *Renewable and Sustainable Energy Reviews* 2015; 42: 313–22.
13. Kansal P, Kumar P, Arya H, Methaila A. Player valuation in Indian premier league auction using data mining technique. In *2014 international conference on contemporary computing and informatics (IC3I)*, 27–29 November 2014, Mysore, India, pp.197–203. New York: IEEE. DOI: 10.1109/IC3I.2014.7019707.
14. Haykin S. *Neural Networks: A Comprehensive Foundation*. New York: Macmillan College Publishing Company, 1994.
15. Sen B, Peker M, Celebi FV, Cavusoglu A. A comparative study on classification of sleep stage based on EEG signals using feature selection and classification algorithms. *Journal of Medical Systems* 2014; 38(3): 1–21.
16. Chen B, Zhao L, Wang X, Lu JH, Liu GY, et al. Wind speed prediction using OLS algorithm based on RBF neural network. In *2009 Asia-Pacific power and energy engineering conference*, 27–31 March 2009, Wuhan, China, pp.1–4. New York: IEEE. DOI: 10.1109/APPEEC.2009.4918972.
17. Peker M. A new approach for automatic sleep scoring: Combining Taguchi based complex-valued neural network and complex wavelet transform. *Computer Methods and Programs in Biomedicine* 2016; 129: 203–216. Available online at <http://dx.doi.org/10.1016/j.cmpb.2016.01.001>

Measurement and Control

Editor

[R Summers](#)

University of Loughborough, UK

eISSN: | ISSN: 00202940|Current volume: 49|Current issue: 1

[Print flyer](#) [Recommend to Library](#)

- DESCRIPTION
- AIMS AND SCOPE
- EDITORIAL BOARD
- ABSTRACTING / INDEXING
- SUBMISSION GUIDELINES

EDITORIAL MANAGEMENT GROUP

[K Burnham](#)

Coventry University, UK

[H Dearden](#)

Time Domain Solutions, UK

[S Denis](#)

Blue Sky Logic, UK

[J Ho](#)

City University of Hong Kong, Hong Kong

[G Jones](#)

Fleksys Consulting, UK

[S Khan](#)

City University London, UK

[P Kyriacou](#)

City University London, UK

[P Norman](#)

AMEC, UK

[D Otterson](#)

Retired (former Chairman Teesside Section), UK

[G Philp](#)

Gambica, UK

[P Twigg](#)

Manchester Metropolitan University, UK

[H Wang](#)

University of Manchester, UK

SCIENCE CITATION INDEX EXPANDED JOURNAL LIST

Search terms: 0020-2940

Total journals found: 1

1. MEASUREMENT & CONTROL

Monthly ISSN: 0020-2940

SAGE PUBLICATIONS LTD, 1 OLIVERS YARD, 55 CITY ROAD, LONDON, ENGLAND,
EC1Y 1SP

1. Science Citation Index Expanded