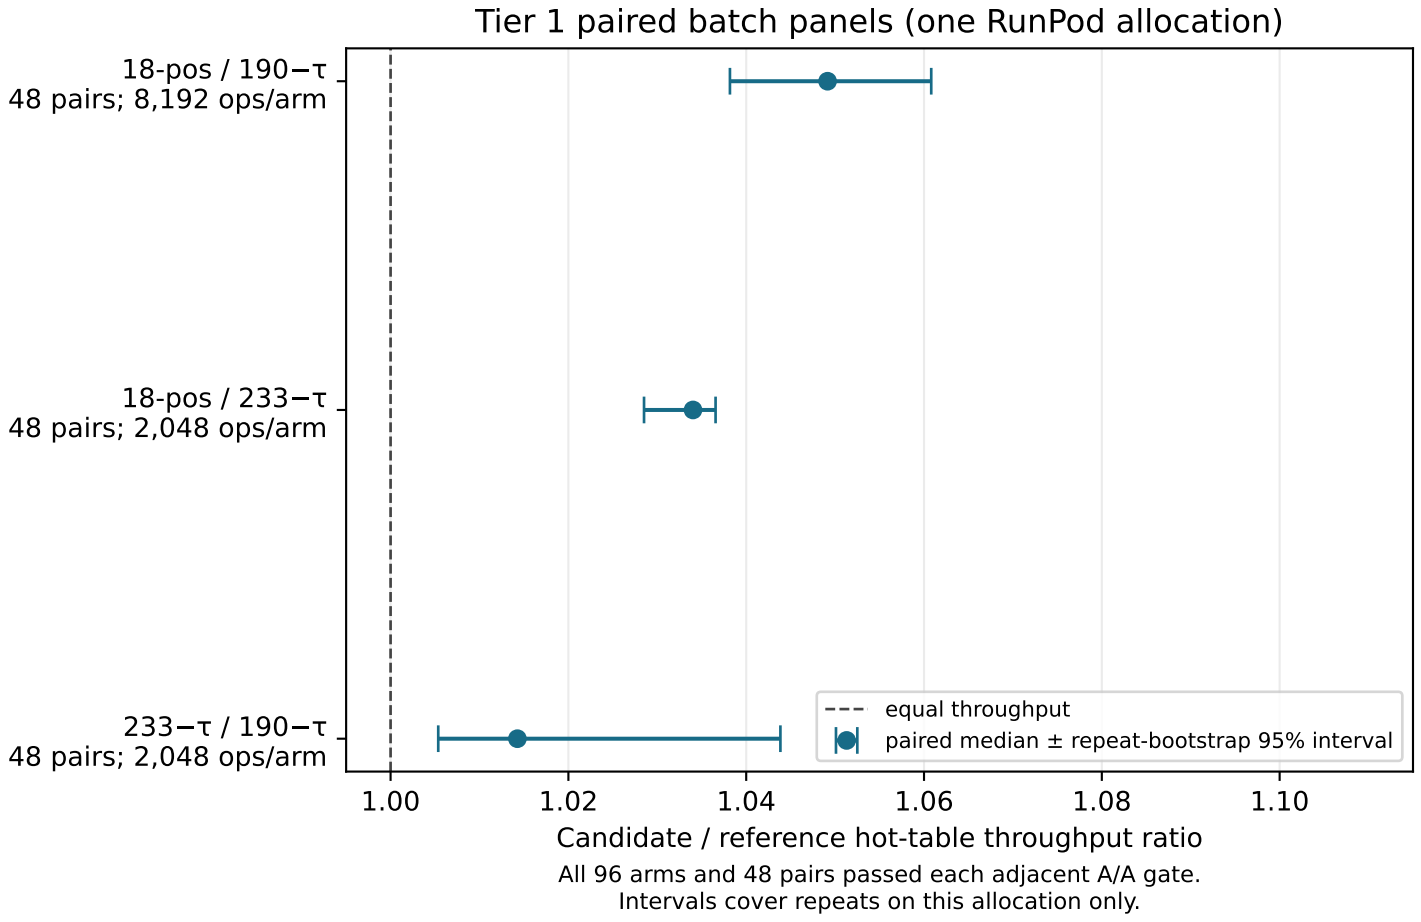
Tier 1 paired batch panels (one RunPod allocation)
18-pos / 190−τ
48 pairs; 8,192 ops/arm
18-pos / 233−τ
48 pairs; 2,048 ops/arm
233−τ / 190−τ
48 pairs; 2,048 ops/arm
equal throughput
paired median ± repeat-bootstrap 95% interval
1.00
1.02
1.04
1.06
1.08
1.10
Candidate / reference hot-table throughput ratio
All 96 arms and 48 pairs passed each adjacent A/A gate.
Intervals cover repeats on this allocation only.