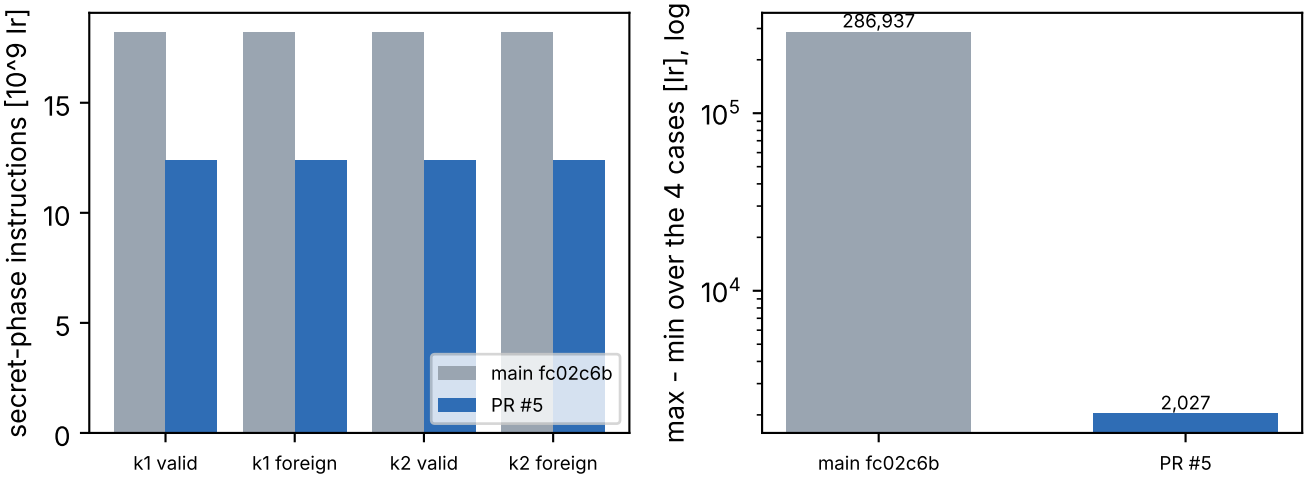
callgrind, all threads: Ir(run) - Ir(prep), identical inputs; measured
secret-phase instructions [10^9 Ir]
0
5
10
15
k1 valid
k1 foreign
k2 valid
k2 foreign
main fc02c6b
PR #5
max - min over the 4 cases [Ir], log
10^4
10^5
286,937
2,027
main fc02c6b
PR #5