


E4 — Time-to-Availability post-PUT, by tier

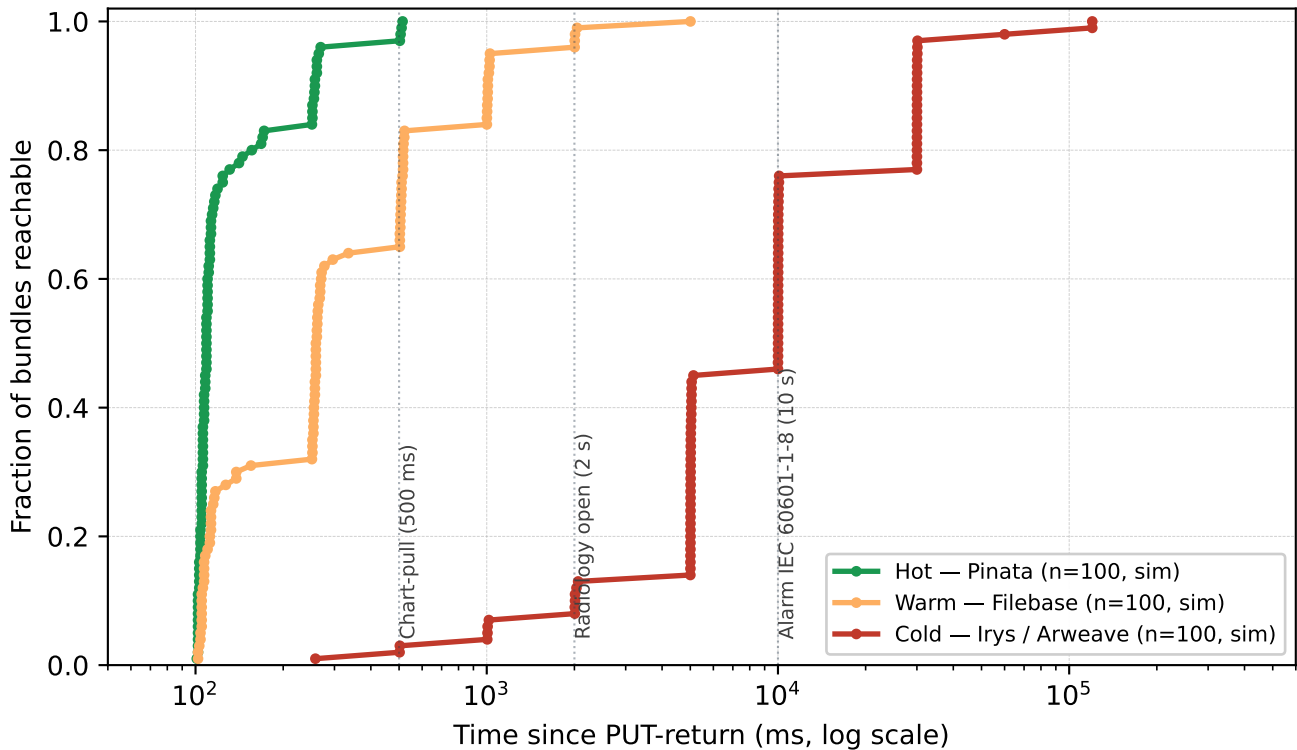

Sim-mode tiers: hot,warm,cold. Calibration: hot prop 50/500ms, warm 200/3000ms, cold 5000/60000ms (P50/P99 propagation).