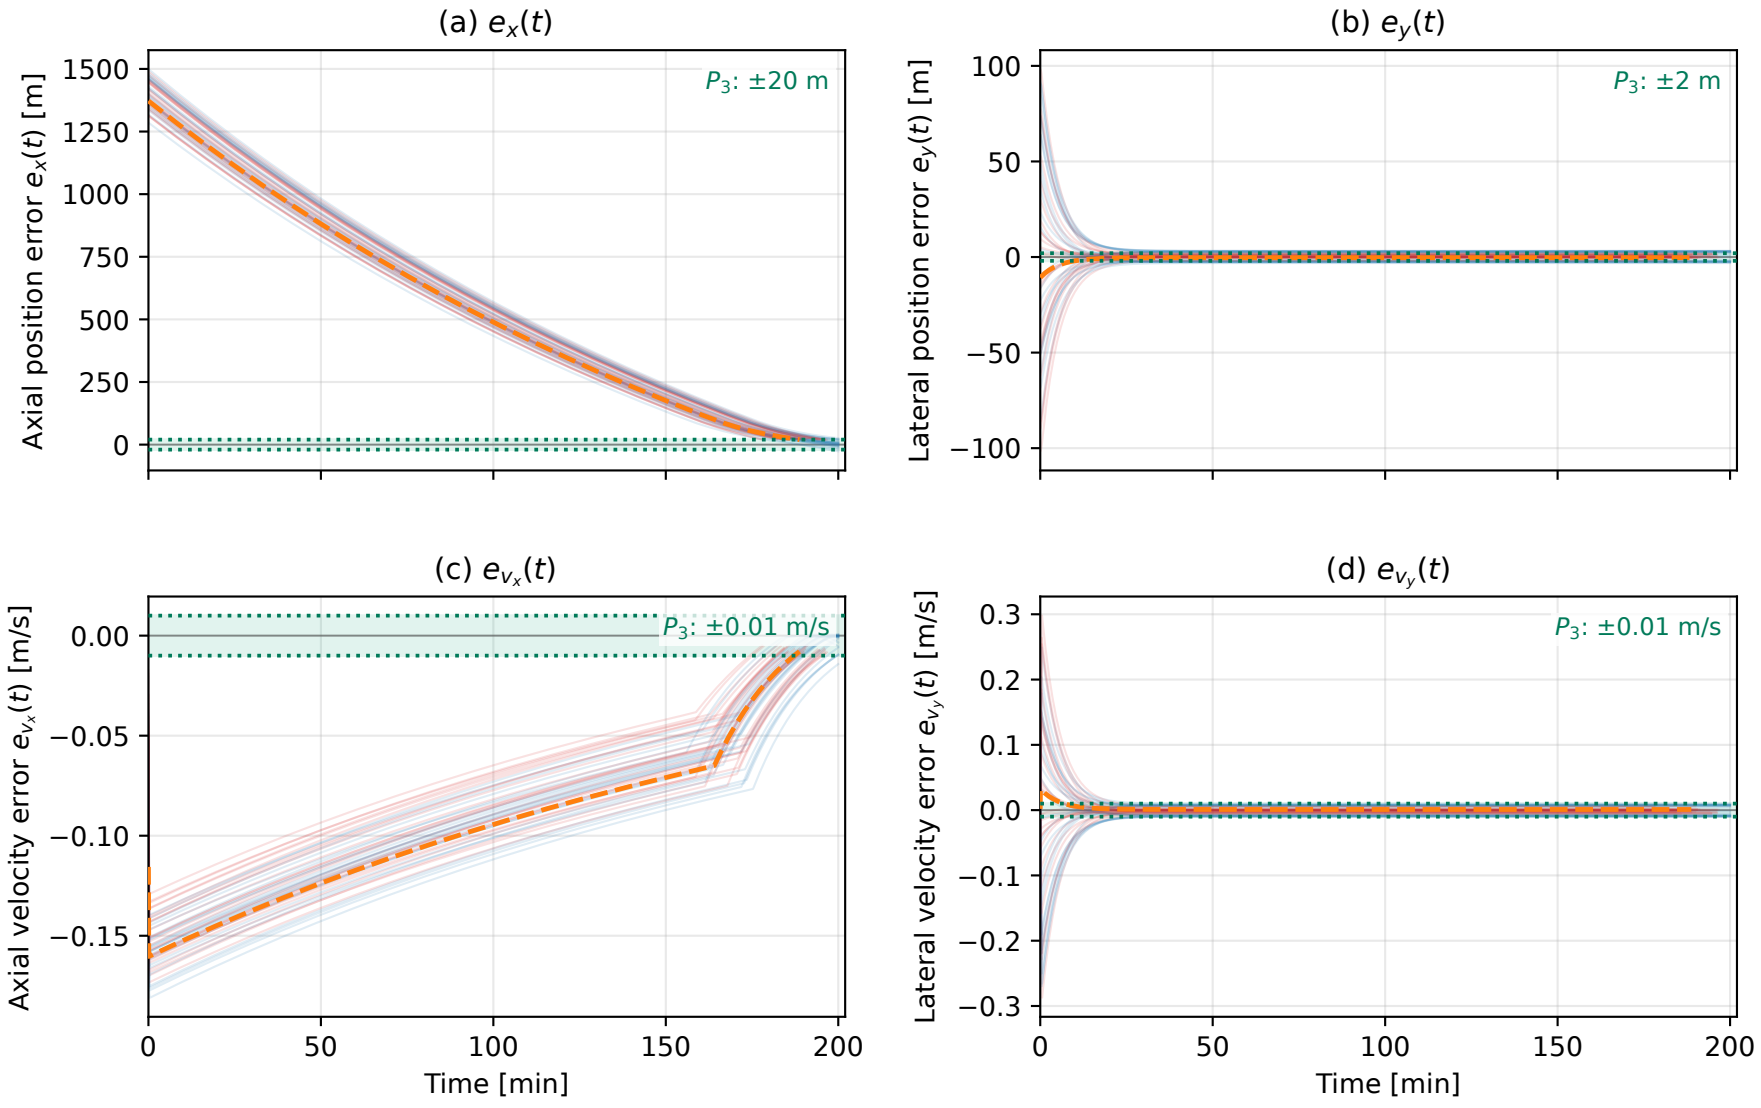

Closing-phase P3 tracking performance ($\Delta t = 0.1$ s): 26/50 successful rollouts (seeds 0-49)
(a) $e_x(t)$
(b) $e_y(t)$
(c) $e_{v_x}(t)$
(d) $e_{v_y}(t)$
Axial position error $e_x(t)$ [m]
Lateral position error $e_y(t)$ [m]
Axial velocity error $e_{v_x}(t)$ [m/s]
Lateral velocity error $e_{v_y}(t)$ [m/s]
Time [min]
P_3: ±20 m
P_3: ±2 m
P_3: ±0.01 m/s
Successful rollouts
Unsuccessful rollouts
Successful rollout nearest median duration (seed 20)
P_3 tolerance (± bound)