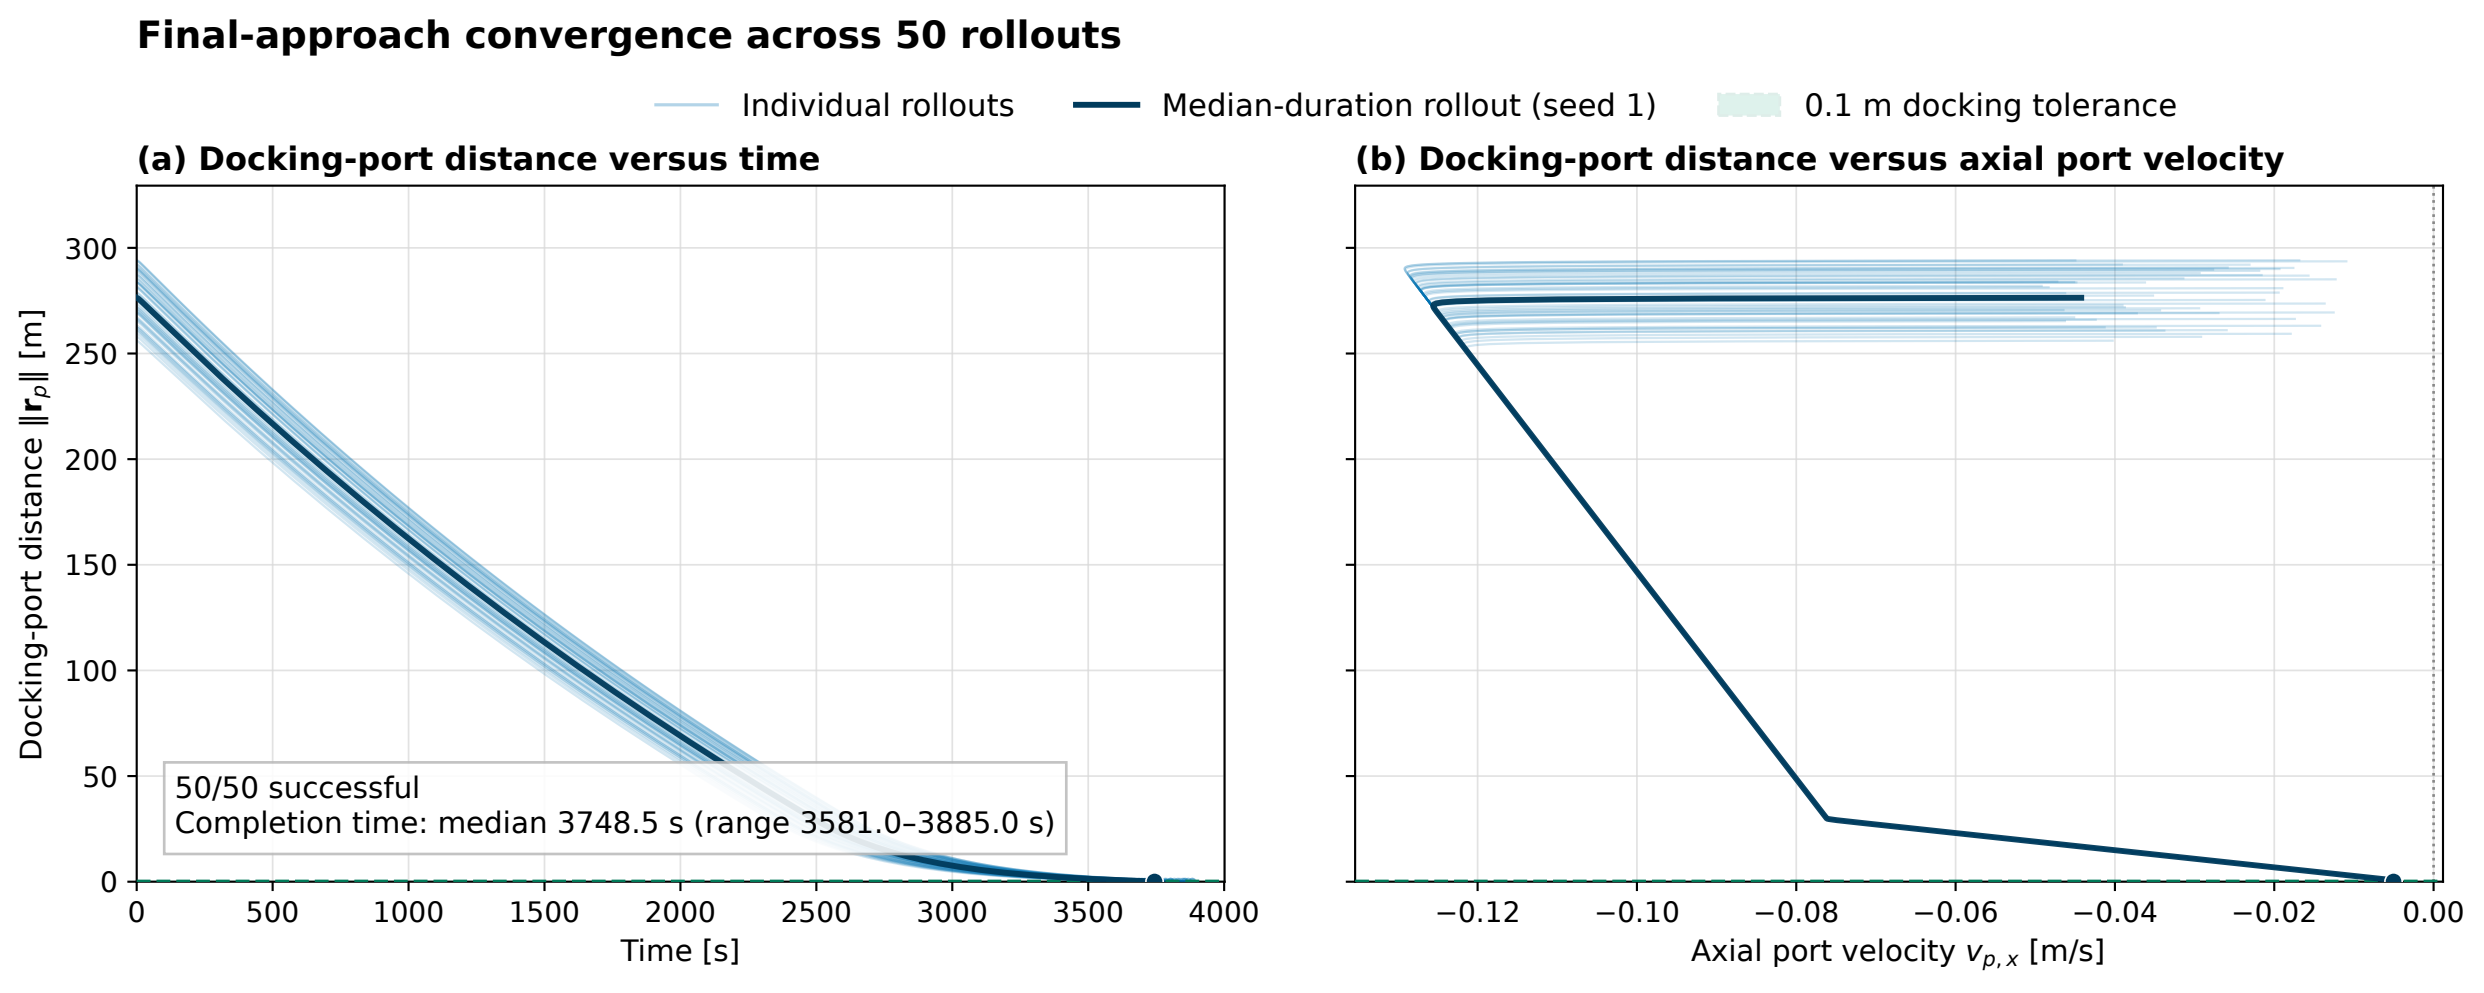

Final-approach convergence across 50 rollouts
Individual rollouts
Median-duration rollout (seed 1)
0.1 m docking tolerance
(a) Docking-port distance versus time
(b) Docking-port distance versus axial port velocity
Docking-port distance $\|\mathbf{r}_p\|$ [m]
Time [s]
Axial port velocity $v_{p,x}$ [m/s]
50/50 successful
Completion time: median 3748.5 s (range 3581.0–3885.0 s)
0
50
100
150
200
250
300
0
500
1000
1500
2000
2500
3000
3500
4000
−0.12
−0.10
−0.08
−0.06
−0.04
−0.02
0.00