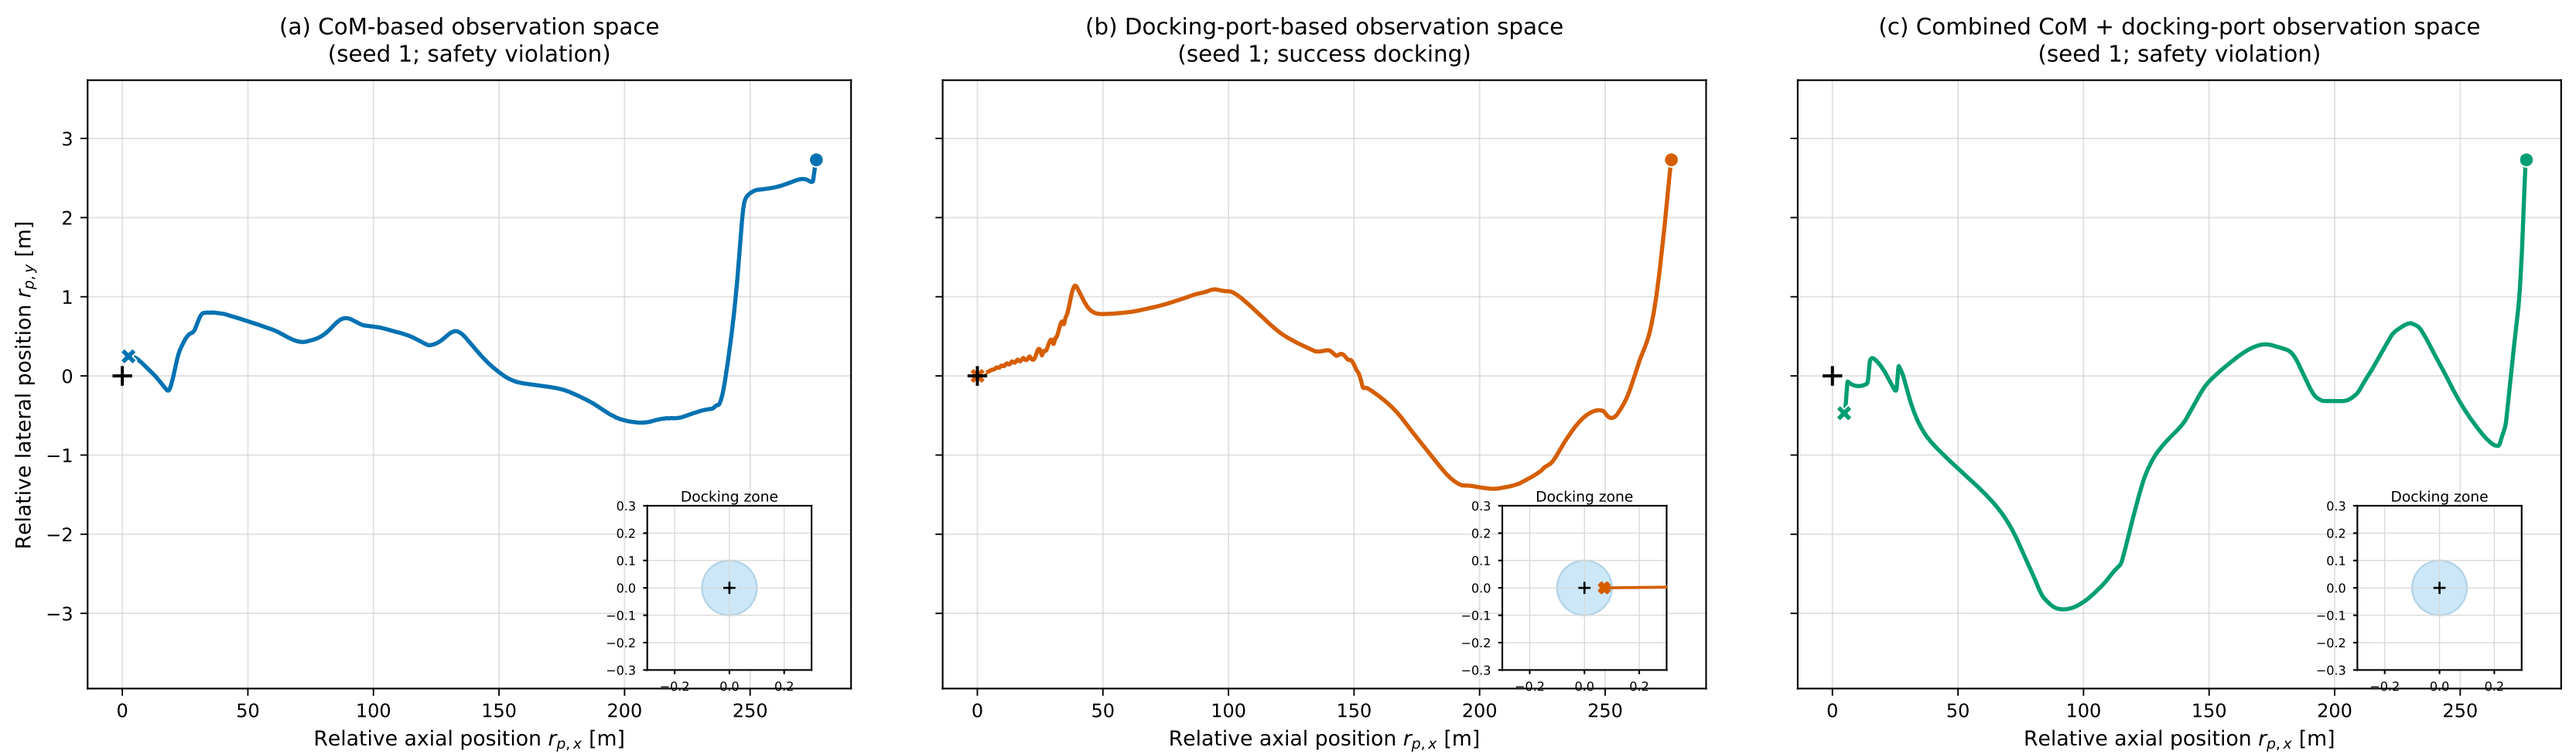
(a) CoM-based observation space
(seed 1; safety violation)
(b) Docking-port-based observation space
(seed 1; success docking)
(c) Combined CoM + docking-port observation space
(seed 1; safety violation)
Relative lateral position $r_{p,y}$ [m]
Relative axial position $r_{p,x}$ [m]
Docking zone
Docking-port trajectory
Start
End
Docking target
Docking position zone $||r_p|| <= 0.1$ m