34 Network Device Management – Lab Exercise

You will configure Syslog and SNMP (Simple Network Management Protocol) logging in this lab exercise. The NMS server is acting as an external Syslog destination.

Lab Topology

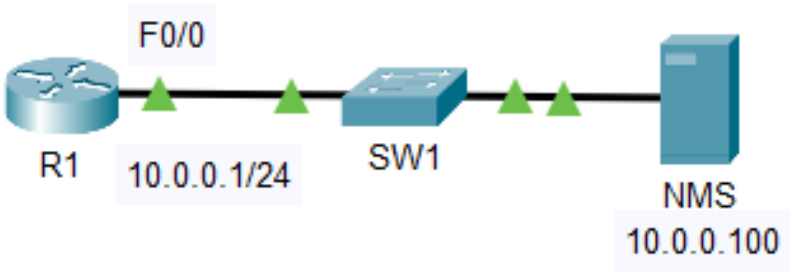

Load the Startup Configurations

Download the '34 Network Device Management.zip' file here. *Extract* the project .pkt file then open it in Packet Tracer. Do not try to open the project from directly inside the zip file.

SNMP and Syslog

1) Configure SNMP communities on R1. Use **Flackbox1** as the Read Only community string, and **Flackbox2** as the Read Write community string.

2) Configure R1 so it will show events from all severity levels to the external Syslog server at 10.0.0.100.

3) Verify you have set the correct severity level.

4) Enable then disable the FastEthernet 0/1 interface on R1.

5) On the Syslog server at 10.0.0.100, click ‘Services’ then ‘SYSLOG’ and check you can see events for the interface coming up then back down.

34 Network Device Management – Answer Key

You will configure Syslog and SNMP (Simple Network Management Protocol) logging in this lab exercise. The NMS server is acting as an external Syslog destination.

SNMP and Syslog

1) Configure SNMP communities on R1. Use **Flackbox1** as the Read Only community string, and **Flackbox2** as the Read Write community string.

```
R1(config)#snmp-server community Flackbox1 ro
R1(config)#snmp-server community Flackbox2 rw
```

2) Configure R1 so it will show events from all severity levels to the external Syslog server at 10.0.0.100.

```
R1(config)#logging 10.0.0.100
R1(config)#logging trap debugging
```

3) Verify you have set the correct severity level.

```
R1#show logging
Syslog logging: enabled (0 messages dropped, 0 messages rate-limited,
      0 flushes, 0 overruns, xml disabled, filtering disabled)

No Active Message Discriminator.

No Inactive Message Discriminator.

Console logging: level debugging, 3 messages logged, xml disabled,
filtering disabled
Monitor logging: level debugging, 3 messages logged, xml disabled,
filtering disabled
Buffer logging: disabled, xml disabled,
filtering disabled

Logging Exception size (4096 bytes)
Count and timestamp logging messages: disabled
Persistent logging: disabled

No active filter modules.

ESM: 0 messages dropped
Trap logging: level debugging, 3 message lines logged
Logging to 10.0.0.100 (udp port 514, audit disabled,
authentication disabled, encryption disabled, link up),
2 message lines logged,
0 message lines rate-limited,
```

```
0 message lines dropped-by-MD,
xml disabled, sequence number disabled
      filtering disabled
```

4) Enable then disable the FastEthernet 0/1 interface on R1.

```
R1(config)#int f0/1
R1(config-if)#no shutdown
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state
to up

R1(config-if)#shutdown
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state
to administratively down
```
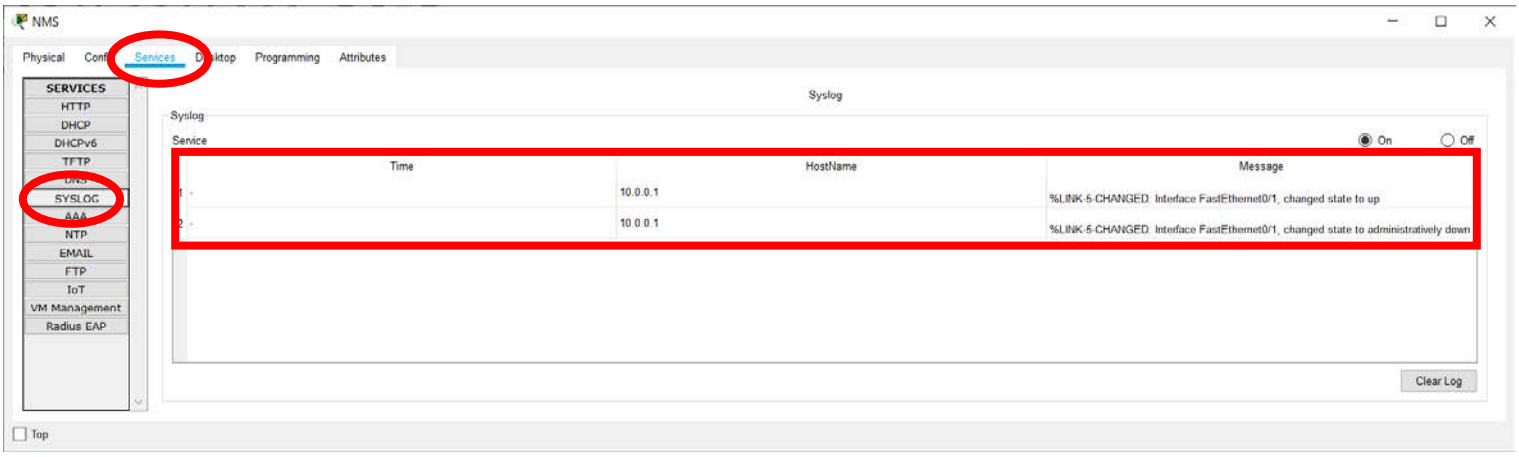
5) On the Syslog server at 10.0.0.100, click ‘Services’ then ‘SYSLOG’ and check you can see events for the interface coming up then back down.