

# ELK CROSS

**TRINCIAERBA / TRINCIASARMENTI /  
TRINCIAFOSSI PER TRATTORI  
DA 30 A 60 CV**

**REAR PRUNING & OFFSET FLAIL  
MOWER FOR TRACTORS  
FROM 30 TO 60 HP**



La trinciaerba / trinciasarmenti ELK CROSS è adatta per l'applicazione a trattori da 30 a 60 CV di potenza e con attacco a 3 punti di categoria 1-2. Usata principalmente per la manutenzione stradale a ridosso delle carreggiate, per la pulizia dei fossati, sotto i pannelli fotovoltaici e per le aree pubbliche, si differenzia dalla Fox Cross in quanto, oltre ad essere ulteriormente rinforzata nella scocca, monta di serie robuste mazze dedicate da 1 kg ciascuna, atte alla triturazione di sarmenti fino a 5 cm di diametro. In una variazione percentuale di piegamento che oscilla tra i -50° e i +90°, la macchina può lavorare anche verticalmente con costanza su lunghe siepi senza alcuna esitazione. Prodotta negli stabilimenti Peruzzo, è disponibile nelle versioni 1200 – 1400 – 1600 - 1800. Per le misure di spostamento laterale si veda la tabella nella pagina qui accanto (\*).

*The ELK CROSS flail mower / shredder is suitable for application to tractors from 30 to 60 HP of power and with 3-point attachment of category 1-2. Mainly used for road maintenance close to the roadways, for cleaning ditches, under photovoltaic panels and for public areas, it differs from the Fox Cross because in addition to being further reinforced in the body, it mounts sturdy dedicated hammers of 1 kg each, suitable for shredding branches up to 5 cm in diameter. In a percentage variation of bending that oscillates between -50° and +90°, the machine can also work vertically with constancy on long hedges without any hesitation. Produced in the Peruzzo factories, it is available in the 1200 – 1400 – 1600 – 1800 versions. For lateral displacement measures, see the table on the next page (\*).*



MODELLO MODEL	LARGHEZZA DI TAGLIO CUTTING WIDTH (MM)	POTENZA MIN. - MAX. NECESSARIA MIN. - MAX. POWER REQUIRED (HP)	POTENZA MIN. - MAX. NECESSARIA MIN. - MAX. POWER REQUIRED (KW)	QUANTITÀ MAZZE 0.6 KG HAMMERS QUANTITY 0.6 KG
ELK CROSS 1200	1165	30 - 40	22 - 30	16
ELK CROSS 1400	1355	35 - 45	26 - 33,5	18
ELK CROSS 1600	1475	40 - 55	30 - 41	20
ELK CROSS 1800	1806	50 - 60	37 - 45	24



**COMPONENTI TECNICHE**  
**TECHNICAL COMPONENTS**



Taglio siepi.  
Bush shred.



Alta riduzione vegetazione.  
High vegetation mulching.


**(\*) MISURE SPOSTAMENTO IN FASE DI LAVORO**  
**(\*) DISPLACEMENT MEASURES DURING WORK**

MODELLO MODEL	A mm	B mm	C mm	D mm	E mm
ELK CROSS 1200	930	590	1490	1600	1865
ELK CROSS 1400	930	740	1670	1600	2045
ELK CROSS 1600	930	860	1790	1600	2165
ELK CROSS 1800	930	1188	2140	1600	2435

**LAME STANDARD**  
**INCLUDED BLADES**



Mazza in acciaio forgiato e temperata.  
Forged steel and hardened hammer.

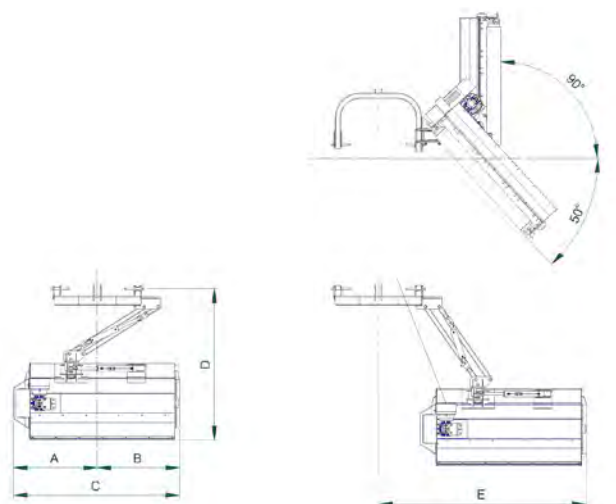

MODELLO MODEL	ALTEZZA DI TAGLIO MINIMA E MASSIMA MIN. & MAX CUTTING HEIGHT (MM)	PESO WEIGHT (KG)	PDF / PTO (RPM)	 (LxPxH)	DIMENSIONI IMBALLAGGIO PACKAGING DIMENSIONS (LxPxH)
ELK CROSS 1200	20 - 75	354	540	1655 x 1600 x 845	1500 x 900 x 1800
ELK CROSS 1400	20 - 75	372	540	1690 x 1600 x 845	1700 x 900 x 1800
ELK CROSS 1600	20 - 75	390	540	1810 x 1600 x 845	1800 x 900 x 1800
ELK CROSS 1800	20 - 75	450	540	2140 x 1600 x 845	2200 x 1100 x 900